#538

PIONEER 10 & 11

EUV EDR PHOTON EMISSION
DATA
72-012A-06A

73-019A-06A

PIONEER 10

EUV EDR PHOTON EMISSION DATA

72-012A-06A

THIS DATA SET HAS BEEN RESTORED. THERE WERE ORIGINALLY 51 9-TRACK, 6250 BPI TAPES. EACH ORIGINAL TAPE CONTAINED AN IBM STANDARD LABEL AND A PATTREN OF THREE BCD FILES AND ONE BINARY FILE THROUGHOUT THE TAPE. WHEN THE TAPES WERE RESTORED THE LABELS WERE REMOVED BUT THE PATTREN OF THREE BCD FILES AND ONE BINARY FILE WERE CONVERTED TO THREE ASCII FILES AND ONE BINARY FILE. THERE ARE 41 RESTORED TAPES. THE DR TAPES ARE 3480 CARTRIDGES AND THE DS TAPES ARE 9-TRACK, 6250 BPI. THE ORIGINAL TAPES WERE CREATED ON AN IBM 360 COMPUTER AND WERE RESTORED ON AN IBM 9021 COMPUTER. THE DR AND DS NUMBERS ALONG WITH THE CORRESPONDING D NUMBERS AND TIME SPANS ARE AS FOLLOWS:

DR#	DS#	DD#	FILES	TIME SPAN
DR004326	DS004326	D054477	180	03/11/72 - 05/01/72
DR004327	DS004327	D054478	68	05/02/72 - 05/23/72
DR004328	DS004328	D054479	72	05/24/72 - 06/11/72
DR004329	DS004329	D054480	64	06/12/72 - 06/30/72
DR004330	DS004330	D054481	76	07/03/72 - 07/19/72
DR004331	DS004331	D048146	124	07/20/72 - 08/20/72
DR004332	DS004332	D048147	211	08/21/72 - 10/13/72
DR004333	DS004333	D048148	388	10/20/72 - 02/02/73
DR004334	DS004334	D048149	276	02/15/73 - 05/15/73
DR004335	DS004335	D048150	144	05/16/73 - 06/20/73
DR004336	DS004336	D048151	156	06/21/73 - 07/28/73
DR004337	DS004337	D048152	196	07/29/73 - 09/24/73

72-012A-06A

DR#	DS#	DD#	FILES	TIME SPAN	
DR004338	DS004338	D048153	150	09/25/73 - 11/02/73	
DR004339	DS004339	D048154	168	11/03/73 - 12/14/73	
DR004340	DS004340	D048155	164	12/13/73 - 03/03/74	
DR004341	DS004341	D048156	379	03/04/74 - 05/22/74	
DR004342	DS004342	D048157	1-235	05/23/74 - 07/20/74	
		D048158	236-259	07/21/74 - 07/27/74	(a)
DR004343	DS004343	D048159	1-357	07/29/74 - 10/30/74	
		D048160	358-362	10/31/74 - 11/01/74	
DR004344	DS004344	D048161	1-534	11/02/74 - 04/14/75	(b)
		D048162	535-570	04/15/75 - 04/24/75	
DR004345	DS004345	D048163	1-327	04/26/75 - 08/14/75	
		D048164	328-340	11/14/75 - 11/16/75	
DR004346	DS004346	D048165	310	08/19/75 - 11/01/75	
DR004347	DS004347	D048166	445	11/02/75 - 02/27/76	
DR004348	DS004348	D048167	1-863	02/28/76 - 11/13/76	
		D048168	864-1159	07/08/78 - 09/26/78	
DR004349	DS004349	D056398	1-685	12/24/76 - 06/21/77	
		D056399	686-1014	08/12/77 - 11/05/77	
DR004350	DS004350	D056400	1-883	11/06/77 - 07/07/78	
		D056401	884-1180	07/08/78 - 09/26/78	
DR004351	DS004351	D056402	1-997	09/27/78 - 09/07/79	
		D056403	998-1325	09/08/79 - 11/26/79	
DR004352	DS004352	D056404	1-916	09/27/78 - 08/14/79	
		D056405	917-1203	08/15/79 - 09/28/80	
DR004353	DS004353	D056406	1-911	09/29/80 - 05/08/81	
		D056407	912-993	05/09/81 - 05/30/81	

72-012A-06A

DR#	DS#	DD#	FILES	TIME SPAN
DR004354	DS004354	D078780	947	05/31/81 - 01/27/82 (c)
DR004355	DS004355	D078781	192	02/24/82 - 04/13/82
DR004356	DS004356	D078782	999	01/01/83 - 09/17/83
DR004357	DS004357	D078783	136	10/15/83 - 11/17/83
DR004358	DS004358	D078784	999	01/01/84 - 09/05/84
DR004359	DS004359	D078785	999	01/01/85 - 10/01/85
DR004360	DS004360	D078786	999	01/01/86 - 10/03/86
DR004361	DS004361	D080574	1530	07/22/86 - 09/22/87
DR004362	DS004362	D080575	1279	01/01/88 - 12/31/88
DR004363	DS004363	D080576	1404	01/01/89 - 12/31/89
DR006119	DS006119	D104164	412	01/01/90 - 05/06/90
DR006120	DS006120	D104165	728	05/07/90 - 11/01/91
DR006121	DS006121	D104166	885	12/06/91 - 12/11/93

(a) FILE 25 WAS MISSING
(b) FILES 341, 533-34 WERE BAD
(c) FILES 948-99 WERE BAD

PIONEER 11

EUV EDR PHOTON EMISSION DATA

73-019A-06A

THIS DATA SET HAS BEEN RESTORED. THERE WERE ORIGINALLY 58 9-TRACK, 6250 BPI TAPES. EACH ORIGINAL TAPE CONTAINED AN IBM STANDARD LABEL BEFORE AND AFTER EACH PATTERN OF THREE BCD FILES AND ONE BINARY FILE WHICH RUN CONTINUOUSLY THROUGHOUT THE TAPE. WHEN THE TAPES WERE RESTORED THE LABELS WERE REMOVED BUT THE PATTERN OF THREE BCD FILES AND ONE BINARY FILE WERE CONVERTED TO THREE ASCII FILES AND ONE BINARY FILE. THERE ARE 42 RESTORED TAPES, 3 OF THESE TAPES ARE WAITING TO BE USED WHEN THE REPLACEMENT TAPES ARRIVE. THE TAPES D080580 AND D080584 WERE BAD, REPLACEMENTS FOR THESE TAPES HAVE BEEN ORDERED. THE DR TAPES ARE 3480 CARTRIDGES AND THE DS TAPES ARE 9-TRACK, 6250 BPI. THE ORIGINAL TAPES WERE CREATED ON AN IBM 360 COMPUTER AND WERE RESTORED ON AN IBM 9021 COMPUTER. THE DR AND DS NUMBERS ALONG WITH THE CORRESPONDING D NUMBERS AND TIME SPANS ARE AS FOLLOWS:

DR#	DS#	DD#	FILES	TIME SPAN
DR004690	DS004690	D057295	154	04/06/73 - 05/20/73
DR004691	DS004691	D057296	66	05/21/73 - 06/07/73
DR004692	DS004692	D057297	61	06/07/73 - 06/23/73
DR004693	DS004693	D057298	1-59	06/23/73 - 07/08/73
		D057299	60-65	07/09/73 - 07/10/73
DR004694	DS004694	D048169	85	07/12/73 - 08/07/73
DR004695	DS004695	D048170	99	08/06/73 - 09/01/73
DR004696	DS004696	D048171	114	09/01/73 - 10/03/73
DR004697	DS004697	D048172	1-309	10/05/73 - 12/22/73
		D048173	310-346	12/23/73 - 12/31/73
DR004698	DS004698	D048174	1-483	01/01/74 - 05/02/74
		D048175	484-540	05/03/74 - 05/16/74

73-019A-06A

DR#	DS#	DD#	FILES	TIME SPAN
DR004699	DS004699	D048176	1-345	05/07/74 - 08/11/74
		D048177	346-384	08/12/74 - 08/22/74
DR004700	DS004700	D048178	1-251	08/22/74 - 10/24/74
		D048179	252-261	10/28/74 - 10/26/74
DR004701	DS004701	D048180	106	10/27/74 - 11/16/74
DR006166	DS006166	D048181	158	11/17/74 - 12/06/74
DR006167	DS006167	D048182	98	12/07/74 - 12/20/74
DR006168	DS006168	D048183	248	12/21/74 - 02/19/75
DR006169	DS006169	D048184	1-511	02/21/75 - 07/01/75
		D048185	512-545	07/02/75 - 07/10/75
DR006170	DS006170	D048186	1-361	07/11/75 - 10/08/75
		D048187	362-371	10/09/75 - 10/11/75
DR006171	DS006171	D048188	264	10/12/75 - 12/28/75
DR006172	DS006172	D048189	1-496	12/29/75 - 05/02/76
		D048190	497-577	05/03/76 - 05/24/76
DR006173	DS006173	D048191	1-686	05/25/76 - 11/14/76
		D060863	687-764	11/15/76 - 12/04/76
DR006174	DS006174	D060864	1-418	12/05/76 - 03/17/77
		D060865	419-460	03/18/77 - 03/28/77
DR006175	DS006175	D060866	1-551	03/29/77 - 08/16/77
		D060867	552-612	08/17/77 - 09/02/77
DR006176	DS006176	D060868	1-743	09/02/77 - 03/06/78
		D060869	744-998	03/07/78 - 05/09/78
DR006177	DS006177	D060870	1-929	05/11/78 - 01/08/79
		D060871	930-1095	01/09/79 - 02/23/79
DR006178	DS006178	D060872	1-683	02/24/79 - 08/22/79
		D060873	684-742	08/22/79 - 09/03/79
DR006179	DS006179	D060874	1-627	09/01/79 - 02/03/80
		D060875	628-781	02/04/80 - 03/13/80
DR006180	DS006180	D060876	1-647	03/14/80 - 09/10/80
		D060877	648-947	09/11/80 - 11/24/80
DR006181	DS006181	D060878	1-600	11/26/80 - 04/19/81
		D060879	602-744	04/20/81 - 05/23/81

73-019A-06A

DR#	DS#	DD#	FILES	TIME SPAN
DR006182	DS006182	D078787	872	05/30/81 - 01/04/82
DR006183	DS006183	D080577	197	01/05/82 - 02/23/82
DR006184	DS006184	D080578	376	02/24/82 - 05/30/82
DR006185	DS006185	D080579	843	05/31/82 - 01/04/83
DR006186	DS006186	D080581	1582	08/30/83 - 10/09/84
DR006187	DS006187	D080582	1445	10/10/84 - 12/31/85
DR006188	DS006188	D080583	455	01/02/86 - 05/06/86
DR006189	DS006189	D080585	1805	07/18/88 - 12/30/89
DR006190	DS006190	D104167	790	01/01/90 - 12/29/90
DR006191	DS006191	D104169	161	04/02/91 - 11/11/91
DR006192	DS006192	D104168	578	11/29/91 - 05/26/93

REQ. AGENT	RAND NO.	ACQ. AGENT
GLS	V0138	WSC

PIONEER 10 & 11

EUV EDR PHOTON EMISSION DATA

72-012A-06A
73-019A-06A

This data set catalog consists of ~~83~~ 98 tapes. Each tape is 6250 BPI, 9 track, binary and is multi-filed. The original tapes were created on an IBM 360 computer. The original tapes were duped on the 3081 and in the process created more output tapes then input tapes. All the tapes are IBM Standard Label, formatted tapes, all the label files are written in EBCDIC. The number of files indicated on the tapes are the number of data files on each tape. The following pages list the D#'S, number of data files per tape, the serial number of each tape and the time span of each tape.

PIONEER 10/EUV EDR PHOTON EMISSION DATA 72-~~102A~~ 012A-06A

D#	SERIAL#	NO. OF FILES	TIME SPAN
D-54477	APF001	180	03/11/72 - 05/01/72
D-54478	APF002	68	05/02/72 - 05/23/72
D-54479	APF003	72	05/24/72 - 06/11/72
D-54480	APF004	64	06/12/72 - 06/30/72
D-54481	APF005	76	07/03/72 - 07/19/72
D-48146	APF006	124	07/20/72 - 08/20/72
D-48147	APF007	211	08/21/72 - 10/13/72
D-48148	APF008	388	10/20/72 - 02/02/73
D-48149	APF009	276	02/15/73 - 05/15/73
D-48150	APF010	144	05/16/73 - 06/20/73
D-48151	APF011	156	06/21/73 - 07/28/73
D-48152	APF012	196	07/29/73 - 09/24/73
D-48153	APF013	150	09/24/73 - 11/02/73
D-48154	APF014	168	11/03/73 - 12/14/73
D-48155	APF015	164	12/13/73 - 03/03/74
D-48156	APF016	379	03/04/74 - 05/22/74
D-48157	APF017	235	05/23/74 - 07/20/74
D-48158	APF017	25	07/21/74 - 07/27/74
D-48159	APF018	357	07/29/74 - 10/30/74
D-48160	APF018	5	10/31/74 - 11/01/74
D-48161	APF019	534	11/02/74 - 04/14/75
D-48162	APF019	39	04/15/75 - 04/24/75
D-48163	APF020	327	04/25/75 - 08/14/75
D-48164	APF020	13	08/14/75 - 08/17/75
D-48165	APF021	~~297~~ 310	08/18/75 - 11/01/75
D-48166	APF022	445	11/02/75 - 02/27/76
D-48167	APF023	863	02/28/76 - 11/12/76
D-48168	APF023	160	11/13/76 - 12/23/76
D-56398	APF024	~~712~~ 685	12/24/76 - 08/10/77
D-56399	APF024	329	08/11/77 - 11/05/77
D-56400	APF025	883	11/06/77 - 07/07/78
D-56401	APF025	297	07/08/78 - 09/26/78
D-56402	APF026	997	09/27/78 - 09/06/79
D-56403	APF026	327	09/07/79 - 11/26/79
D-56404	APF027	916	11/27/79 - 07/24/80
D-56405	APF027	207	07/24/80 - 09/28/80
D-56406	APF028	912	09/29/80 - 05/07/81
D-56407	APF028	88	05/08/81 - 05/30/81
D-78780	C-27093	2997	5/31/81 - 1/11/82
D-78781	C-27094	576	2/24/82 - 4/13/82
D-78782	C-27095	2997	1/1/83 - 9/17/83
D-78783	C-27096	408	1/15/83 - 11/17/83
D-78784	C-27097	2997	1/1/84 - 9/5/84
D-78785	C-27098	2997	1/1/85 - 10/1/85
D-78786	C-27099	2997	1/1/86 - 10/3/86

PIONEER 11/ EUV PHOTON EMISSION DATA 73-019A-06A

D#	SERIAL#	# OF FILES	TIME SPAN
D-57295	APG001	154	04/06/73 - 05/20/73
D-57296	APG002	66	05/20/73 - 06/07/73
D-57297	APG003	61	06/08/73 - 06/23/73
D-57298	APG004	59	06/24/73 - 07/08/73
D-57299	APG004	5	07/09/73 - 07/10/73
D-48169	APG005	85	07/12/73 - 08/07/73
D-48170	APG006	99	08/07/73 - 09/01/73
D-48171	APG007	122	09/02/73 - 10/04/73
D-48172	APG008	309	10/05/73 - 12/22/73
D-48173	APG008	36	12/23/73 - 12/31/73
D-48174	APG009	483	01/01/74 - 05/02/74
D-48175	APG009	56	05/03/74 - 05/15/74
D-48176	APG010	345	05/07/74 - 08/11/74
D-48177	APG010	41	08/12/74 - 08/22/74
D-48178	APG011	152	08/23/74 - 10/24/74
D-48179	APG011	9	10/25/74 - 10/26/74
D-48180	APG012	106	10/27/74 - 11/16/74
D-48181	APG013	158	11/17/74 - 12/06/74
D-48182	APG014	98	12/07/74 - 12/20/74
D-48183	APG015	248	12/21/74 - 02/19/75
D-48184	APG016	511	02/21/75 - 07/01/75
D-48185	APG016	37	07/02/75 - 07/10/75
D-48186	APG017	361	07/11/75 - 10/08/75
D-48187	APG017	10	10/07/75 - 10/11/75
D-48188	APG018	264	10/12/75 - 12/28/75
D-48189	APG019	496	12/29/75 - 05/02/76
D-48190	APG019	81	05/03/76 - 05/24/76
D-48191	APG020	686	05/25/76 - 11/14/76
D-60863	APG020	77	11/15/76 - 12/04/76
D-60864	APG021	418	12/05/76 - 03/17/77
D-60865	APG021	41	03/18/77 - 03/28/77
D-60866	APG022	551	03/29/77 - 08/16/77
D-60867	APG022	61	08/17/77 - 09/02/77
D-60868	APG023	743	09/02/77 - 03/06/78
D-60869	APG023	255	03/07/78 - 05/09/78
D-60870	APG024	929	05/11/78 - 01/08/79
D-60871	APG024	166	01/09/79 - 02/23/79
D-60872	APG025	683	02/24/79 - 08/22/79
D-60873	APG025	60	08/22/79 - 08/31/79
D-60874	APG026	627	09/01/79 - 02/03/80
D-60875	APG026	153	02/04/80 - 03/13/80
D-60876	APG027	647	03/14/80 - 09/10/80
D-60877	APG027	300	09/11/80 - 11/24/80
D-60878	APG028	600	11/26/80 - 04/19/81
D-60879	APG028	144	04/20/81 - 05/23/81
D-78787	C-27100	2616	5/30/81 - 1/4/82

REQ. AGENT	ACQ. AGENT
CMW	NJS

D#	VOLUME LABEL	NO OF FILES	TIME SPAN
D-080577	APG030	590	01/05/82 - 02/05/82
D-080578	PG031	1127	02/06/82 - 04/06/82
D-080579	PG032	2528	04/07/82 - 01/04/83
D-080580	(tape missing		
D-080581	PG034	4745	08/30/83 - 10/09/84
D-080582	PG035	4334	10/10/84 - 12/31/85
D-080583	PG036	1364*	01/02/86 - 05/06/86
D-080584	(tape missing)		
D-080585	PG038	5414	07/18/88 - 12/30/89

* Invalid label encountered at file 16

extreme Ultravio + Photomet. data on magnetic tape

"T" #'s

SPACE SCIENCES INSTITUTE

TELEPHONE: (213) 741-5484

March 13, 1981

National Space Science Data Center
Acquisition and Analysis Branch, Code 601
Goddard Space Flight Center
Greenbelt, Maryland 20771

Subject: Submission of Data/Documentation to NSSDC
NSSDC ID #72-012A-06 & 73-019A-06

We have prepared documentation and data for submission to NSSDC. Dr. D. L. Judge, who is the Principle Investigator for the ultraviolet experiments aboard the Pioneer 10/11 spacecraft, has asked me to send you the data to be archived at NSSDC. I am employed by Dr. Judge at the Earth and Space Sciences Institute and it is my responsibility for maintaining the Pioneer project data base here at the University of Southern California

A total of 54 digital magnetic tapes, containing data for the ultraviolet experiments, have been prepared. We plan to make several shipments of these tapes to NSSDC and this will be our first shipment of 10 digital magnetic tapes. The tapes are:

Tape Name	Pioneer S/C	Period Covered (DOY/YR)		
APF001	10	71/1972	-	122/1972
APF002	10	123/1972	-	144/1972
APF003	10	145/1972	-	163/1972
APF004	10	164/1972	-	182/1972
APF005	10	185/1972	-	201/1972
APG001	11	96/1973	-	140/1973
APG002	11	140/1973	-	158/1973
APG003	11	159/1973	-	174/1973
APG004	11	175/1973	-	191/1973
APG005	11	193/1973	-	219/1973

All tapes are IBM Standard Label recorded at 6250 BPI. Complete documentation for the tapes' contents has been included in a separate letter. We would appreciate it if you would copy these tapes and return the original to us:

Professor D. L. Judge
Earth and Space Sciences Institute
University of Southern California
Stauffer Hall of Science, Rm. #274
Los Angeles, California 90007

PIONEER 10

	TAPE NAME	PERIOD COVERED (DOY/YR)
	APF 006	202/72 - 233/72
	APF 007	234/72 - 287/72
	APF 008	294/72 - 33/73
	APF 009	46/73 - 135/73
Box 1	APF 010	136/73 - 171/73
	APF 011	172/73 - 209/73
	APF 012	210/73 - 267/73
	APF 013	268/73 - 306/73
	APF 014	307/73 - 348/73
	APF 015	347/73 - 62/74
	APF 016	63/74 - 140/74
	APF 017	143/74 - 208/74
	APF 018	210/74 - 305/74
	APF 019	307/74 - 114/75
	APF 020	116/75 - 229/75
Box 2	APF 021	230/75 - 305/75
	APF 022	307/75 - 58/76
	APF 023	59/76 - 358/76
	APF 024	359/76 - 309/77
	APF 025	310/77 - 269/78
	APF 026	270/78 - 330/79
Box 3	APF 027	331/79 - 272/80
	APF 028	273/80 - 150/81

PIONEER 11

	TAPE NAME	PERIOD COVERED (DOY/YR)
	APG 006	213/73 - 244/73
	APG 007	245/73 - 277/73
	APG 008	278/73 - 365/73
	APG 009	1/74 - 136/74
Box 3	APG 010	127/74 - 234/74
	APG 011	235/74 - 299/74
	APG 012	301/74 - 320/74
	APG 013	321/74 - 340/74
	APG 014	341/74 - 354/74
	APG 015	355/74 - 50/75
	APG 016	52/75 - 191/75
	APG 017	192/75 - 284/75
	APG 018	285/75 - 362/75
	APG 019	363/75 - 145/76
	APG 020	146/76 - 339/76
Box 4	APG 021	340/76 - 87/77
	APG 022	88/77 - 245/77
	APG 023	245/77 - 129/78
	APG 024	131/78 - 54/79
	APG 025	55/79 - 246/79
	APG 026	244/79 - 73/80
	APG 027	74/80 - 329/80
Box 5	APG 028	331/80 - 150/81

UNIVERSITY OF SOUTHERN CALIFORNIA
UNIVERSITY PARK
LOS ANGELES, CALIFORNIA 90007

DEPARTMENT OF PHYSICS

March 26, 1982

NATIONAL SPACE SCIENCE DATA CENTER
Acquisition and Analysis Branch, Code 601
Goddard Space Flight Center
Greenbelt, Maryland 20771

Attention : MR. RALPH POST

Subject : DATA SUBMISSION TO NSSDC
NSSDC ID #72-0123A-06 and 73-019A-06

We have prepared data for submission to NSSDC. Dr. D.L. Judge, who is the Principal Investigator for the ultraviolet photometer experiment aboard the Pioneer 10/11 Spacecraft, has asked me to send you the remainder of our data tapes to be archived at NSSDC. A total of 46 digital magnetic tapes have been prepared and shipped to you in five boxes. All tapes are IBM Standard Label recorded at 6250 BPI. Complete documentation for the tapes' contents is given in our original document submitted to NSSDC on March 30, 1981. A list of the data tapes and the time period covered by each tape is also enclosed. In addition, computer printout of data plots and their description have been enclosed.

If there are any additional questions regarding the data submission, please contact me :

Steve[redacted] ~~Askew~~ CALLAGHAN
Center for → Space Sciences
University of Southern California
Stauffer Hall of Science, Rm. #[redacted] 274
Los Angeles, California 90007
Telephone : (213) 743-[redacted] 2050

Sincerely,

Steven Askew

STEVEN ASKEW

SA:sbgs

Description of Pioneer 10/11 USC Ultraviolet Data Plots

The data presented in this plot is output generated by the computer program listed in the document, "Operational Characteristics and Experimental Data Record Format for the University of Southern California Pioneer 10 & 11 Ultraviolet Photometer Experiments", submitted to NSSDC in March, 1981. We have included the first section of this document to provide a description of the experiment and the data.

Plot Description:

The data plot gives a time averaged counting rate vs. clock angle for the two channel photometer. The title contains:

Pss Pass: pppp DOY:ddd mmm dd,yyyy

where:

ss	=	10 for Pioneer 10
		11 for Pioneer 11
pppp	=	pass number or number of days since launch
ddd	=	the day of year
mmm	=	month
dd	=	date
yyyy	=	year

The y-axis represents the average count rate in counts per second, while the x-axis gives the clock angle in degrees. At the bottom of the plot, the following is listed:

CHAN:	H - hydrogen or λ_L
	He - Helium or λ_S
	The channel of the instrument
INTERVAL TIMES:	Time period for which the average is taken. Given in hours: minutes: seconds
MIN, AVG, MAX :	Values for corresponding count rate given in counts per second
CLOCK Min, Max :	Clock angle where (minimum/maximum) count rate occurs.
#OBS :	Number of observations made by the instrument

P11 PASS: 99 DOY:154 JUN 13, 1975

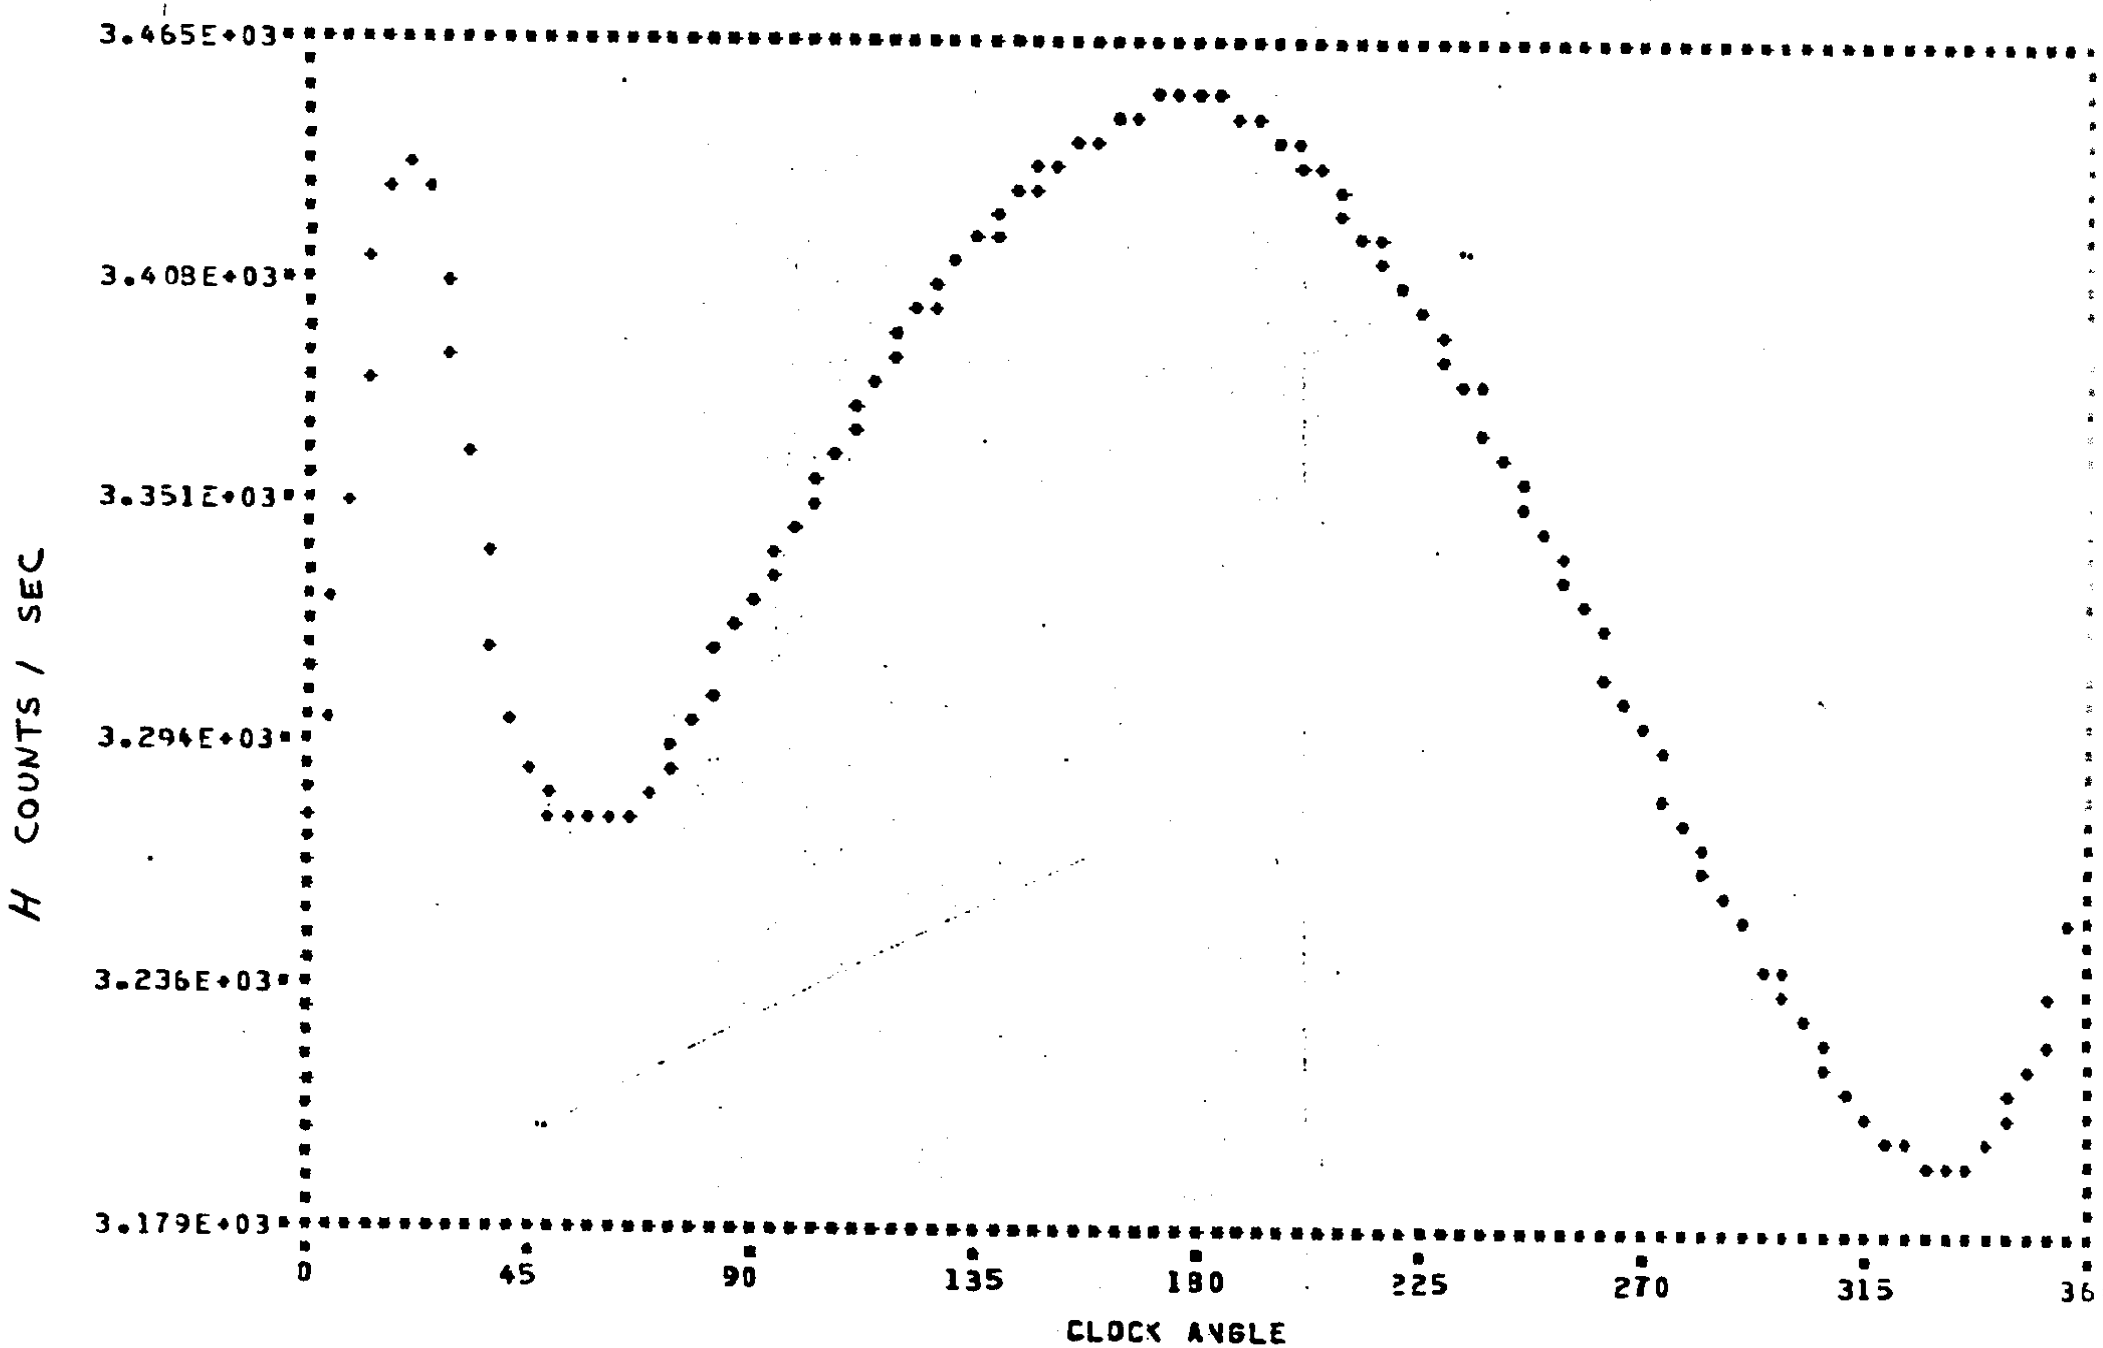

INTERVAL TIMES START	END	TOTAL	COUNTS PER SECOND MIN	AVG	MAX	CLOCK ANGLE DF MIN	MAX	# DOS
00:01:01	23:18:01	03:49:09	3.194E+03	3.340E+03	3.451E+03	333.23	175.73	32157.

P11 PASS: 99 DOY:164 JUN 13, 1975

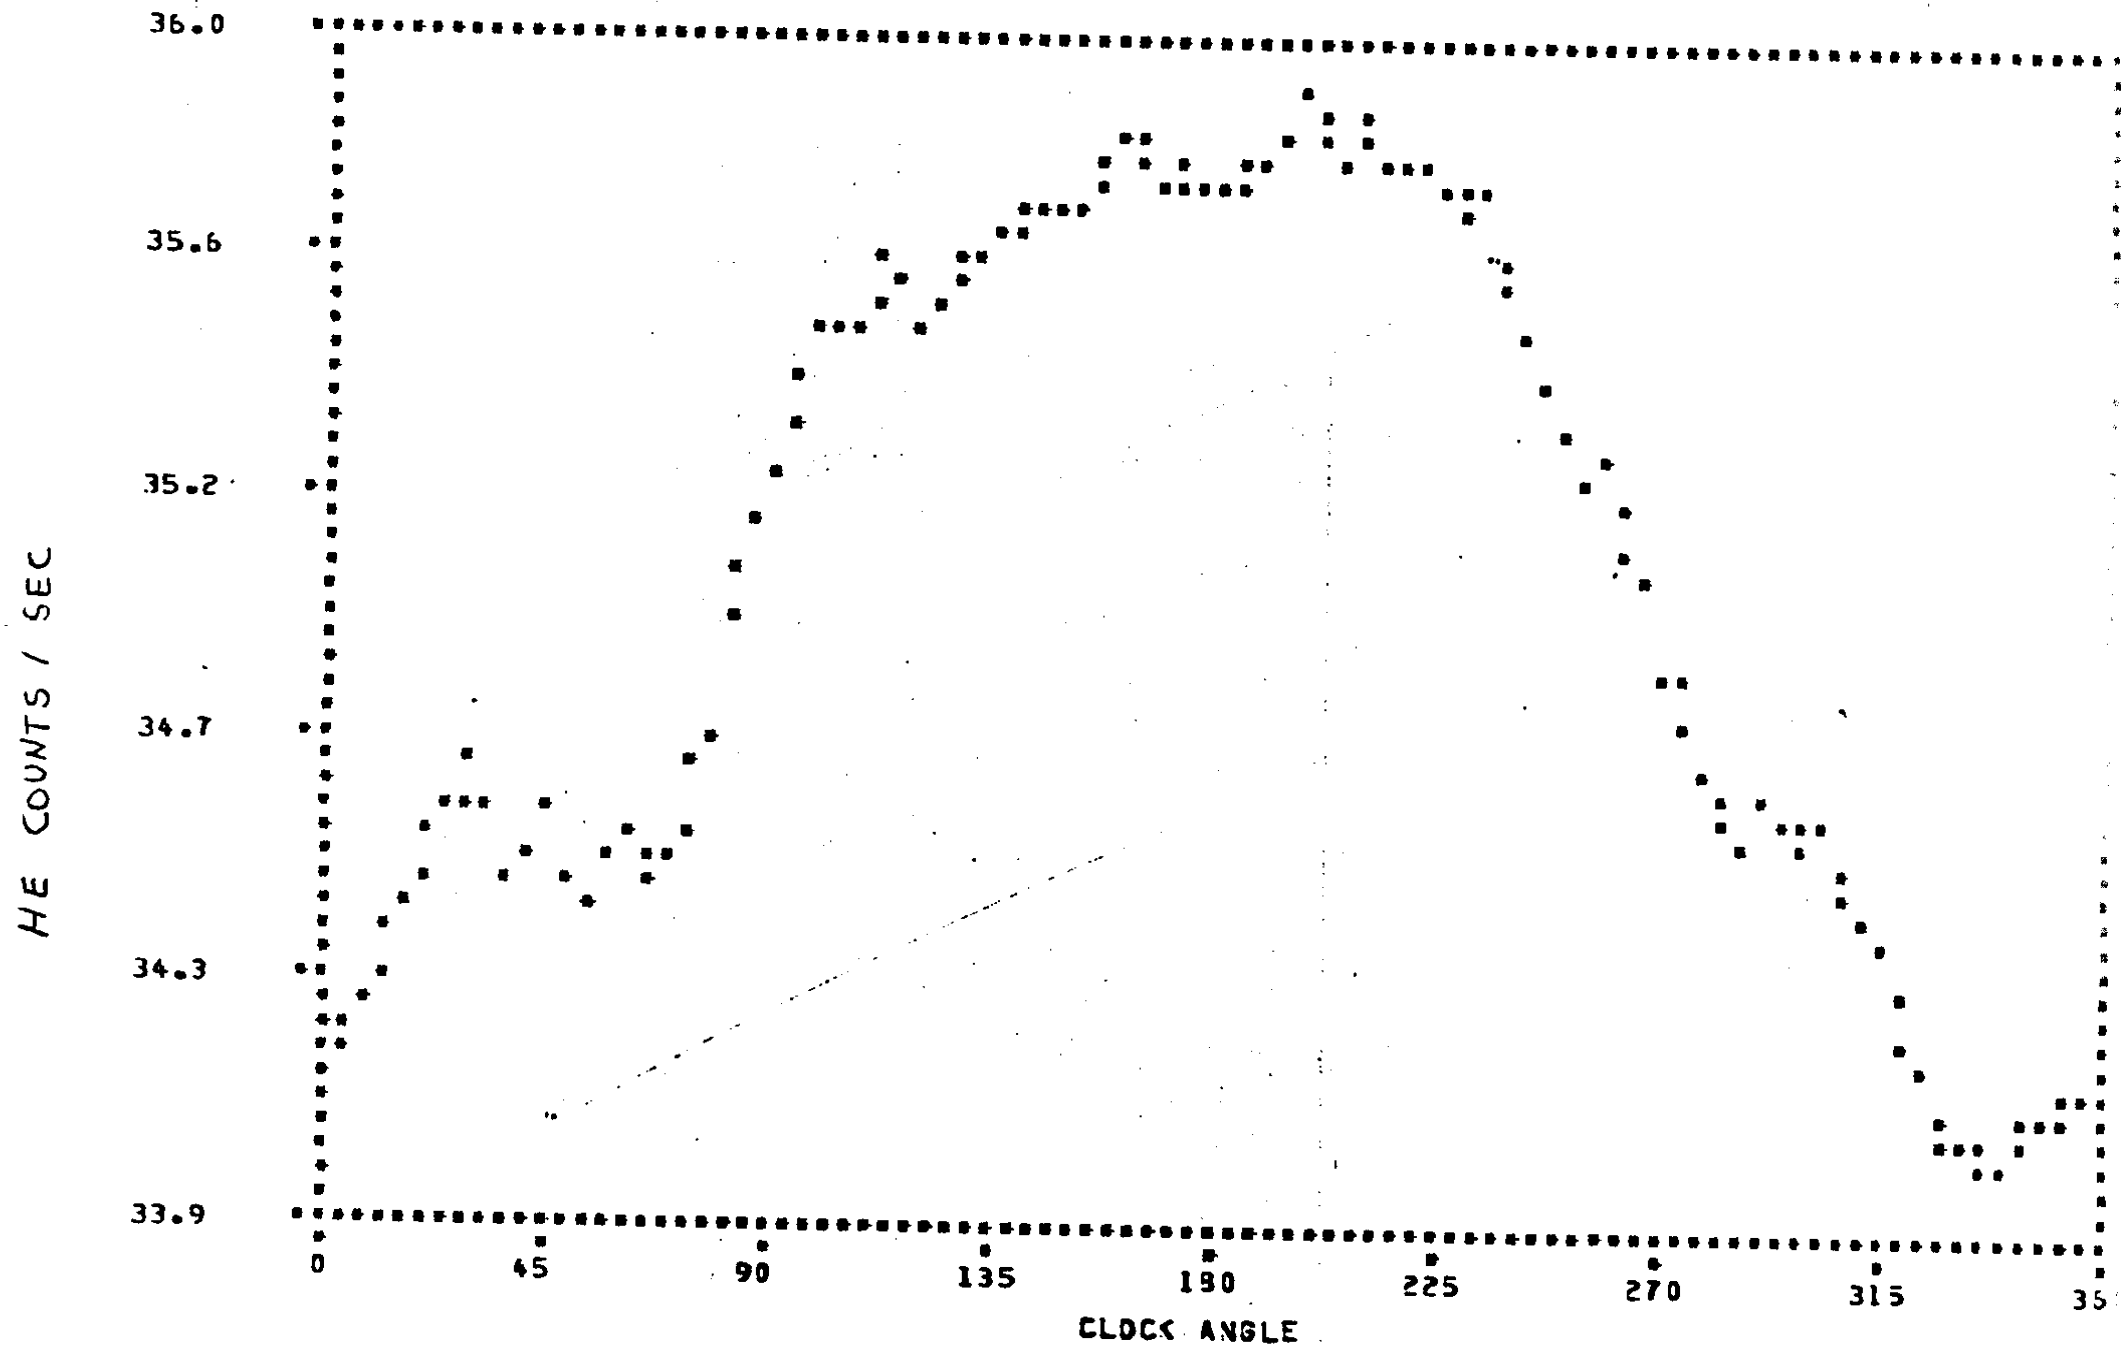

INTERVAL TIMES START	END	TOTAL	COUNTS PER SECOND MIN	AVG	MAX	CLOCK ANGLE OF MIN	MAX	# OBS
00:00:42	23:18:03	08:48:41	3.401E+01	3.504E+01	3.592E+01	341.72	198.23	32170.

I. INTRODUCTION

A. EXPERIMENT DESCRIPTION

The ultraviolet photometer on board Pioneer 10/11 covers two broad spectral regions as shown in Fig. 1 (Judge et al. 1976).[1] The short wavelength (λ_S) band is sensitive only to emissions shortward of about 800 Å, and includes the 584 Å resonance line of helium. the region of sensitivity of the long-wavelength (λ_L) channel includes the hydrogen resonance line at 1216 Å. The instrument design was based on the expected dominance of hydrogen and helium gases in the Jovian, Saturian and interplanetary glow. Analysis of the interplanetary UV data allows one to determine the physical parameters of the interplanetary H and He gases and the "background" radiation. The instrument, because of its broad band response, can also detect emissions from stars and high temperature plasma shortward of $\sim$ 1400 Å, a region for which the Earth's atmosphere is opaque. The measurement of a star's UV emission provides data not only on its thermal characteristics, but the extinction coefficient of the intervening medium, as well. The ability to observe high temperature plasma emission for $\lambda < 800$ Å in the λ_S channel is particularly useful for detecting shock excited atomic ions.

The photometer field of view is limited by a mechanical collimator whose optical axis is oriented at an angle $\theta_o = 20°$ with respect to the spacecraft axis (Fig. 2). The scanning motion that results from spacecraft rotation sweeps the field of view over the surface of a 40° cone having its vertex at the spacecraft and its cone axis oriented along the spin axis. The spin axis of the spacecraft is parallel to the S/C-earth line.

The weight, power, and reliability constraints necessitated the choice of a simple photometric system for the ultraviolet measurements. The Pioneer ultraviolet experiment uses the transmission properties and photoelectric

---

[1]Judge, D. L., R. W. Carlson, F. M. Wu and U. G. Harmann, 1976, in "Jupiter", edited by T. Gehrels, pp. 1068, University of ARizona Press, Tucson, Arizona.

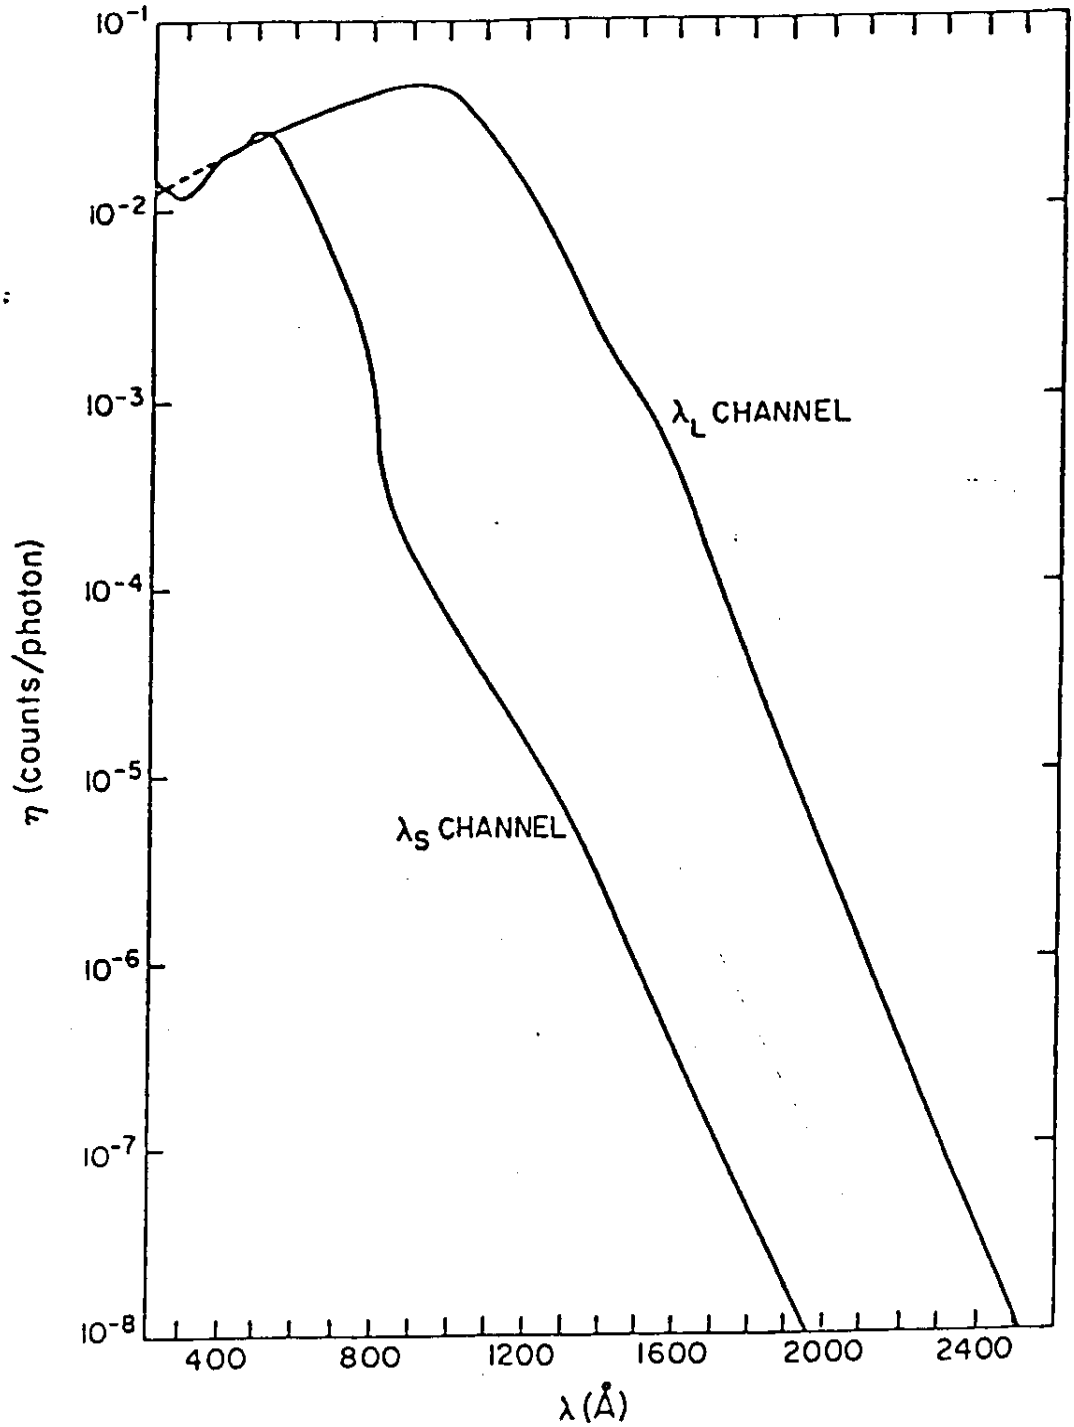

Figure 1. Spectral sensitivity of the two channel ultraviolet photometer of the University of Southern California on board both Pioneer 10 and 11.

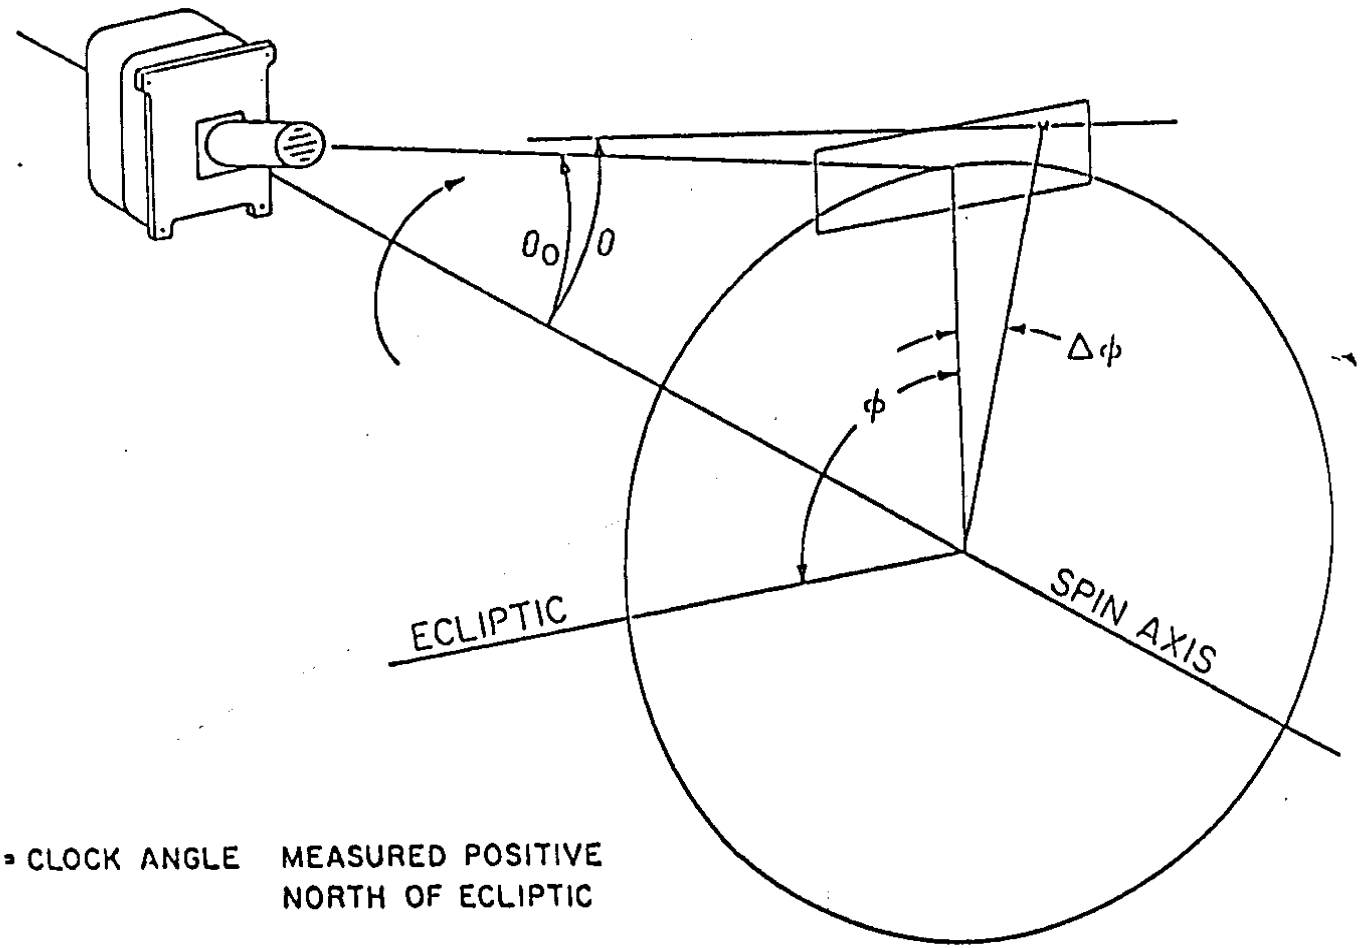

ϕ = CLOCK ANGLE MEASURED POSITIVE NORTH OF ECLIPTIC

θ = CONE ANGLE FIXED AT ~20°

Figure 2. Viewing geometry of the photometer. The optical axis of the photometer is at an angle ∿ 20° to the spin axis of the spacecraft. The angle ϕ is the clock angle relative to the ecliptic. The instantaneous field of view is normally 1° x 10°.

response of materials to measure intensities in the two spectral regions indicated above. A schematic diagram of the instrument is shown in Figure 3. Radiation transmitted through the mechanical collimator is incident upon a thin film filter through which short wavelength photons are transmitted. These photons strike a photocathode, producing photoelectrons which are accelerated through a 180 Volt potential into the input cone of a channel electron multiplier. The front surface of the filter is used as a photocathode with a second electron multiplier to detect the longer wavelength Lyman-α photons. The pulses of charge appearing at the anodes are amplified with charge amplifiers and passed to a discriminator. An electronic switch commutates between the two channels every two rolls of the spacecraft, approximately 25 sec. The pulses are accumulated over the frame period of the spacecraft telemetry system (3/8 sec at Jupiter encounter). The accumulated counts are logarithmically compressed to 9 bits and sampled by the telemetry system for transmission.

A cover was placed over the entrance aperture to insure against dust particles entering the instrument and to protect the thin film filter from escaping air currents during launch. The cover was deployed 6 days after launch.

The instrument parameters are presented in Table 1.

The experiment data records contain both attitude and roll data, sufficient to calculate the average photometer pointing direction for each integration to within a few degrees. Spacecraft trajectory data can be obtained from Supplementary Experiment Data Records (SEDR) supplied by the NASA Ames Research Center.

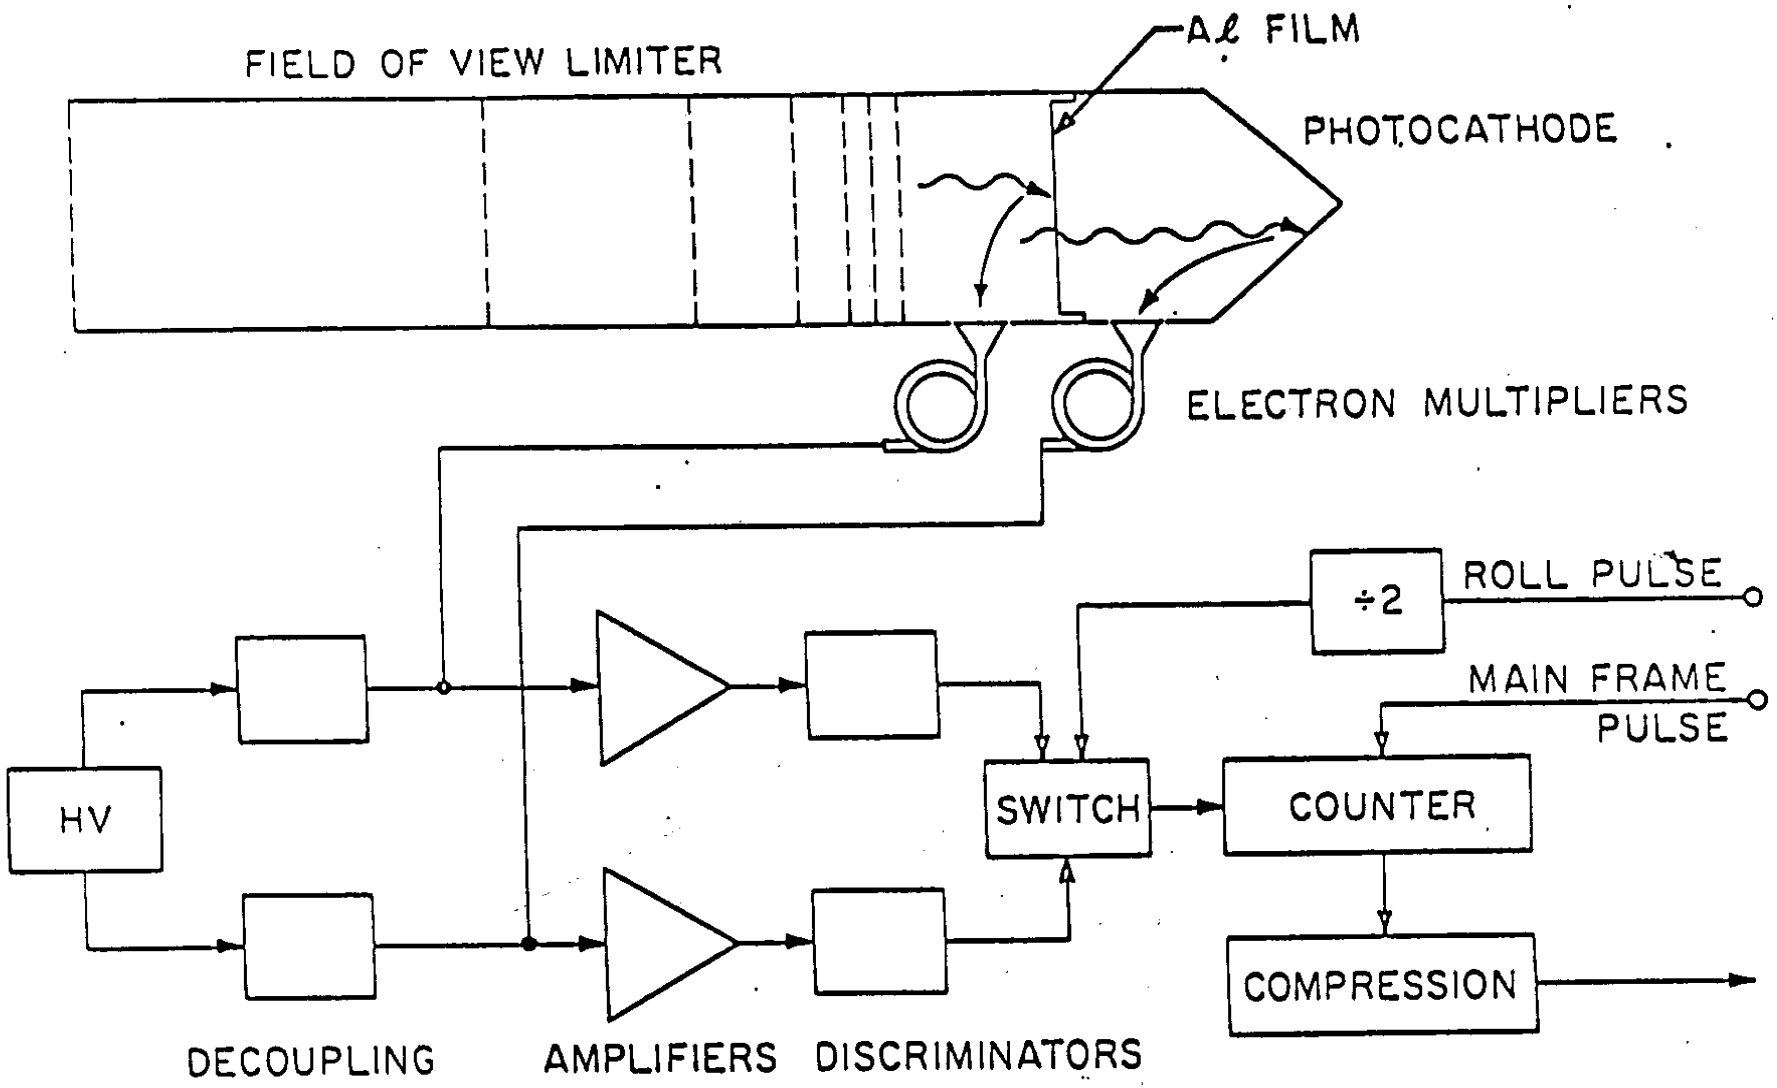

Figure 3. Schematic diagram of the UV instrument

TABLE 1

USC XUV PHOTOMETER INSTRUMENT PARAMETERS

Instrument Type:	Two channel XUV Photometer
Channels:	λ_L channel for emissions with $\lambda < 1400$ Å; λ_S channel for emissions with $\lambda < 800$ Å.
Field of View (FWHM):	1.15° x 9.3° (3.26×10^{-3} sterad)
Filter:	Thin film aluminum filter
Entrance Area:	1.67 cm^2
Geometric Thruput:	434 photons sec^{-1} $Rayleigh^{-1}$
Sensitivity:	4.9 counts/sec-R (Lyman-α) 7.2 counts/sec-R (HeI λ584 Å)
Photocathode:	Aluminum (Lyman-α), LiF (He)
Sensors:	Bendix model 4028 channeltrons (2)
Weight:	650 grams
Power:	650 mW
Data Storage:	19 bits, compressed to 9 bits floating point
Electronics:	Pulse counting electronics; 3.75 kV high voltage supply; Low-voltage power conditioning unit; Compressed-storage logic; Piston actuator--Dust cover removal system.

OPERATIONAL CHARACTERISTICS AND EXPERIMENT DATA RECORD FORMAT

FOR THE

UNIVERSITY OF SOUTHERN CALIFORNIA PIONEER 10 & 11
ULTRAVIOLET PHOTOMETER EXPERIMENTS

March, 1981

TABLE OF CONTENTS

I. INTRODUCTION

A. Description and Operation of the Instruments

B. List of Reports

C. Data Decompression

E. Instrument Timing

F. Channel and Roll Angle Identification

II. PHYSICAL FORM OF THE DATA

A. Introduction

B. Standard Label Format

C. Tape Maps for Pioneer 10

D. Tape Maps for Pioneer 11

III. EXPERIMENT DATA RECORD FORMATS

A. File 1 - Logistics File

B. File 2 - Command File

C. File 3 - Spacecraft Attitude Data

D. File 4 - Experiment Data

E. Binary Data Representation

IV. A SAMPLE DATA PROCESSING PROGRAM FOR PIONEER USC/UV DATA

A. Introduction

B. Listing of the Computer Program

C. Definitions of Computer Program Variables

LIST OF FIGURES

LIST OF TABLES

I. INTRODUCTION

A. EXPERIMENT DESCRIPTION

The ultraviolet photometer on board Pioneer 10/11 covers two broad spectral regions as shown in Fig. 1 (Judge et al. 1976).[1] The short wavelength (λ_S) band is sensitive only to emissions shortward of about 800 Å, and includes the 584 Å resonance line of helium. the region of sensitivity of the long-wavelength (λ_L) channel includes the hydrogen resonance line at 1216 Å. The instrument design was based on the expected dominance of hydrogen and helium gases in the Jovian, Saturian and interplanetary glow. Analysis of the interplanetary UV data allows one to determine the physical parameters of the interplanetary H and He gases and the "background" radiation. The instrument, because of its broad band response, can also detect emissions from stars and high temperature plasma shortward of $\sim$ 1400 Å, a region for which the Earth's atmosphere is opaque. The measurement of a star's UV emission provides data not only on its thermal characteristics, but the extinction coefficient of the intervening medium, as well. The ability to observe high temperature plasma emission for $\lambda < 800$ Å in the λ_S channel is particularly useful for detecting shock excited atomic ions.

The photometer field of view is limited by a mechanical collimator whose optical axis is oriented at an angle $\theta_o = 20°$ with respect to the spacecraft axis (Fig. 2). The scanning motion that results from spacecraft rotation sweeps the field of view over the surface of a 40° cone having its vertex at the spacecraft and its cone axis oriented along the spin axis. The spin axis of the spacecraft is parallel to the S/C-earth line.

The weight, power, and reliability constraints necessitated the choice of a simple photometric system for the ultraviolet measurements. The Pioneer ultraviolet experiment uses the transmission properties and photoelectric

---

[1]Judge, D. L., R. W. Carlson, F. M. Wu and U. G. Harmann, 1976, in "Jupiter", edited by T. Gehrels, pp. 1068, University of ARizona Press, Tucson, Arizona.

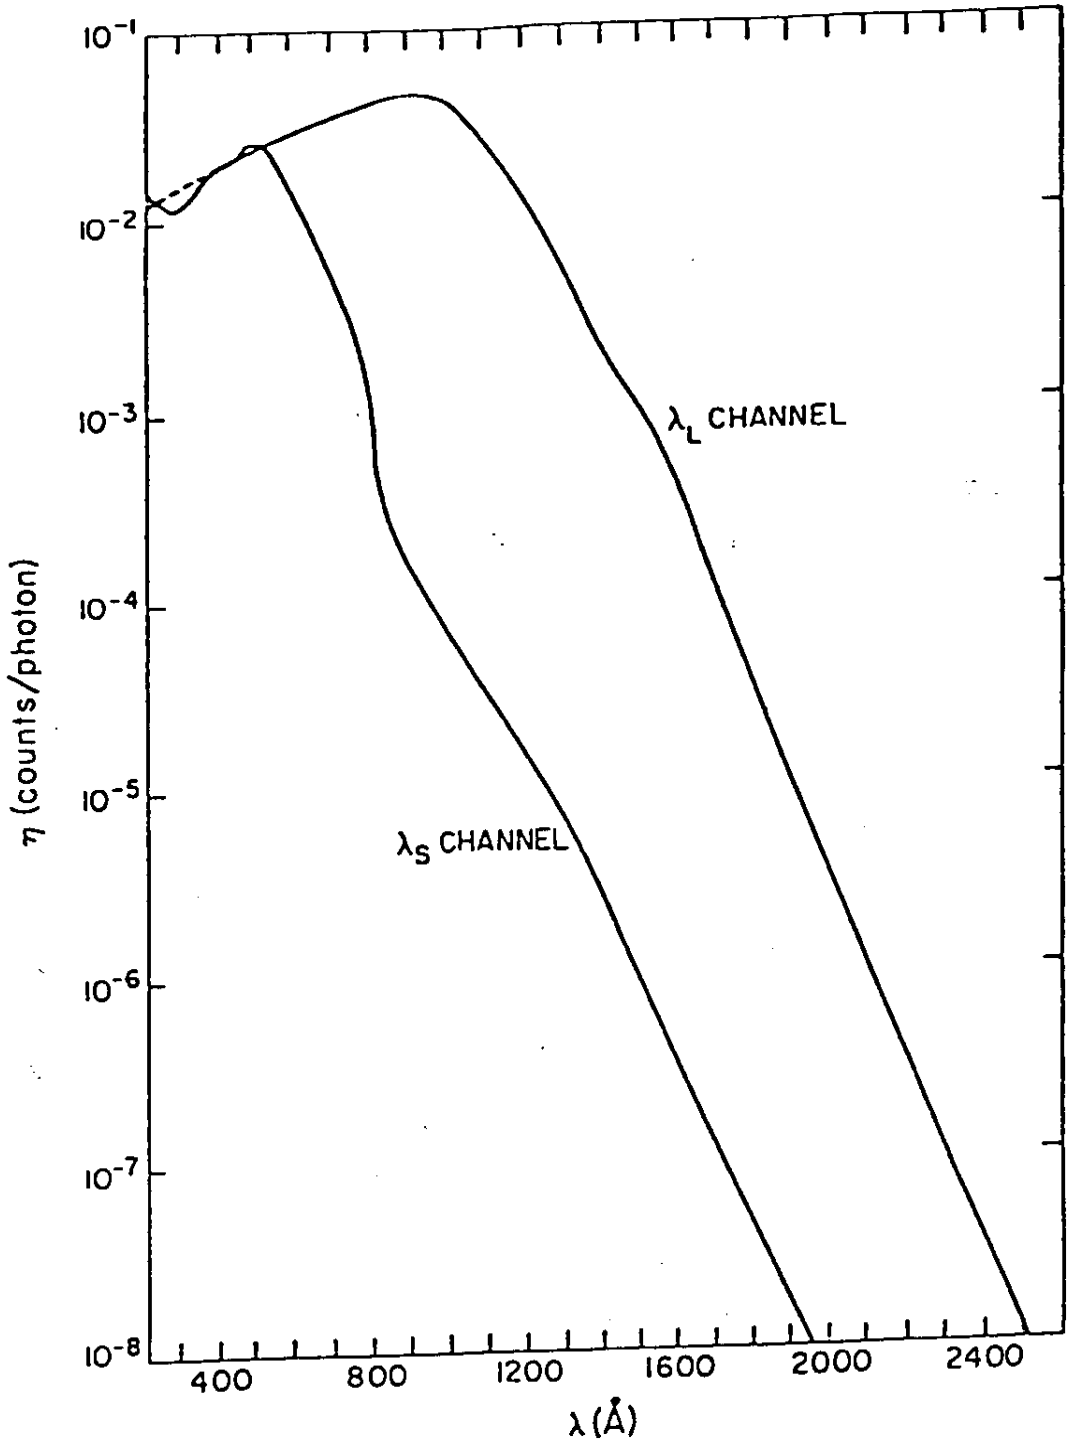

Figure 1. Spectral sensitivity of the two channel ultraviolet photometer of the University of Southern California on board both Pioneer 10 and 11.

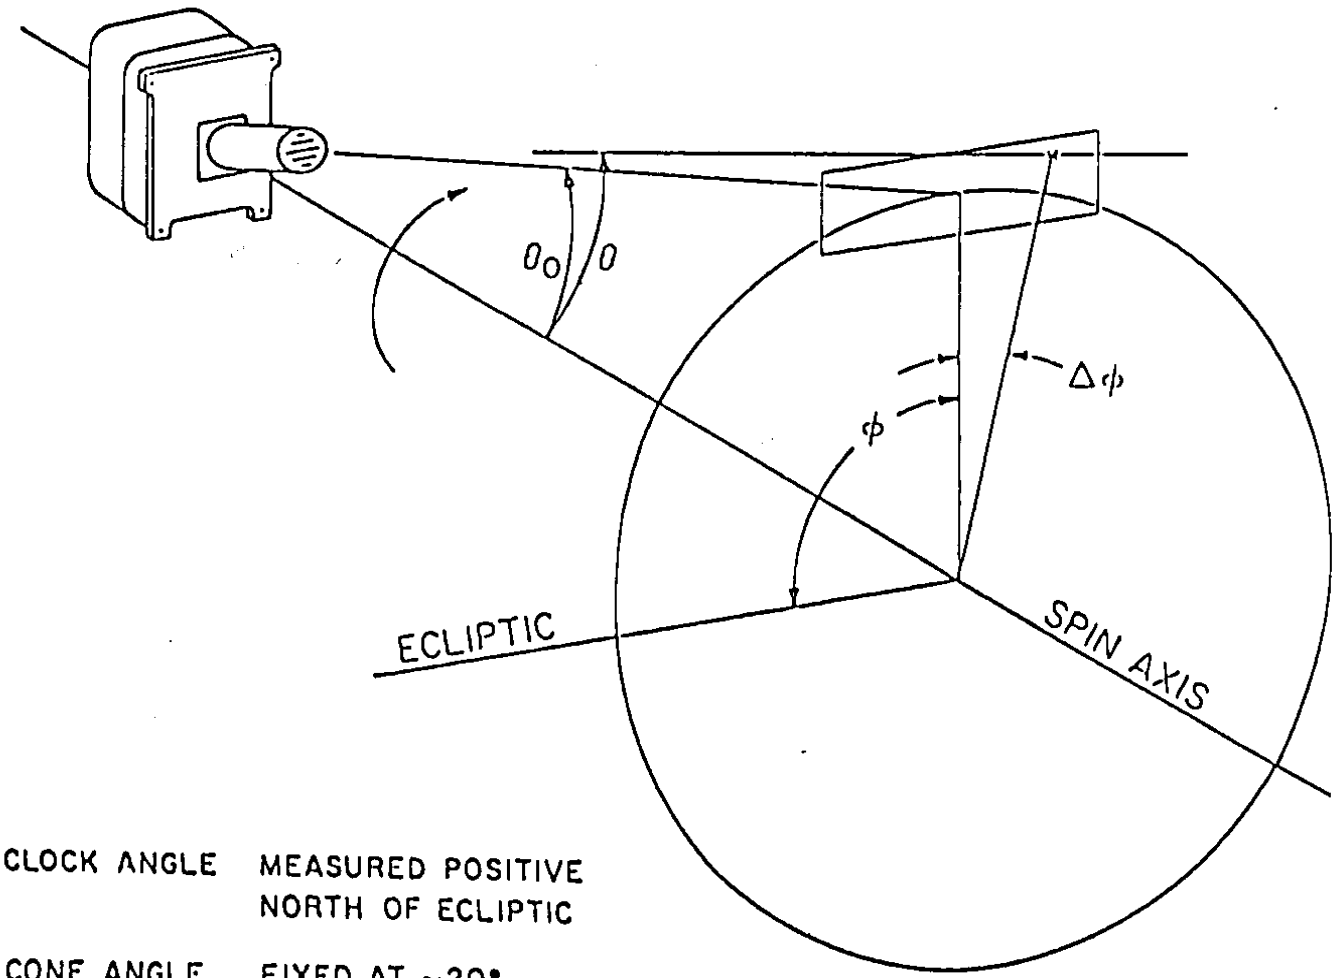

ϕ = CLOCK ANGLE MEASURED POSITIVE NORTH OF ECLIPTIC

θ = CONE ANGLE FIXED AT ~20°

Figure 2. Viewing geometry of the photometer. The optical axis of the photometer is at an angle ∿ 20° to the spin axis of the spacecraft. The angle ϕ is the clock angle relative to the ecliptic. The instantaneous field of view is normally 1° x 10°.

response of materials to measure intensities in the two spectral regions indicated above. A schematic diagram of the instrument is shown in Figure 3. Radiation transmitted through the mechanical collimator is incident upon a thin film filter through which short wavelength photons are transmitted. These photons strike a photocathode, producing photoelectrons which are accelerated through a 180 Volt potential into the input cone of a channel electron multiplier. The front surface of the filter is used as a photocathode with a second electron multiplier to detect the longer wavelength Lyman-α photons. The pulses of charge appearing at the anodes are amplified with charge amplifiers and passed to a discriminator. An electronic switch commutates between the two channels every two rolls of the spacecraft, approximately 25 sec. The pulses are accumulated over the frame period of the spacecraft telemetry system (3/8 sec at Jupiter encounter). The accumulated counts are logarithmically compressed to 9 bits and sampled by the telemetry system for transmission.

A cover was placed over the entrance aperture to insure against dust particles entering the instrument and to protect the thin film filter from escaping air currents during launch. The cover was deployed 6 days after launch.

The instrument parameters are presented in Table 1.

The experiment data records contain both attitude and roll data, sufficient to calculate the average photometer pointing direction for each integration to within a few degrees. Spacecraft trajectory data can be obtained from Supplementary Experiment Data Records (SEDR) supplied by the NASA Ames Research Center.

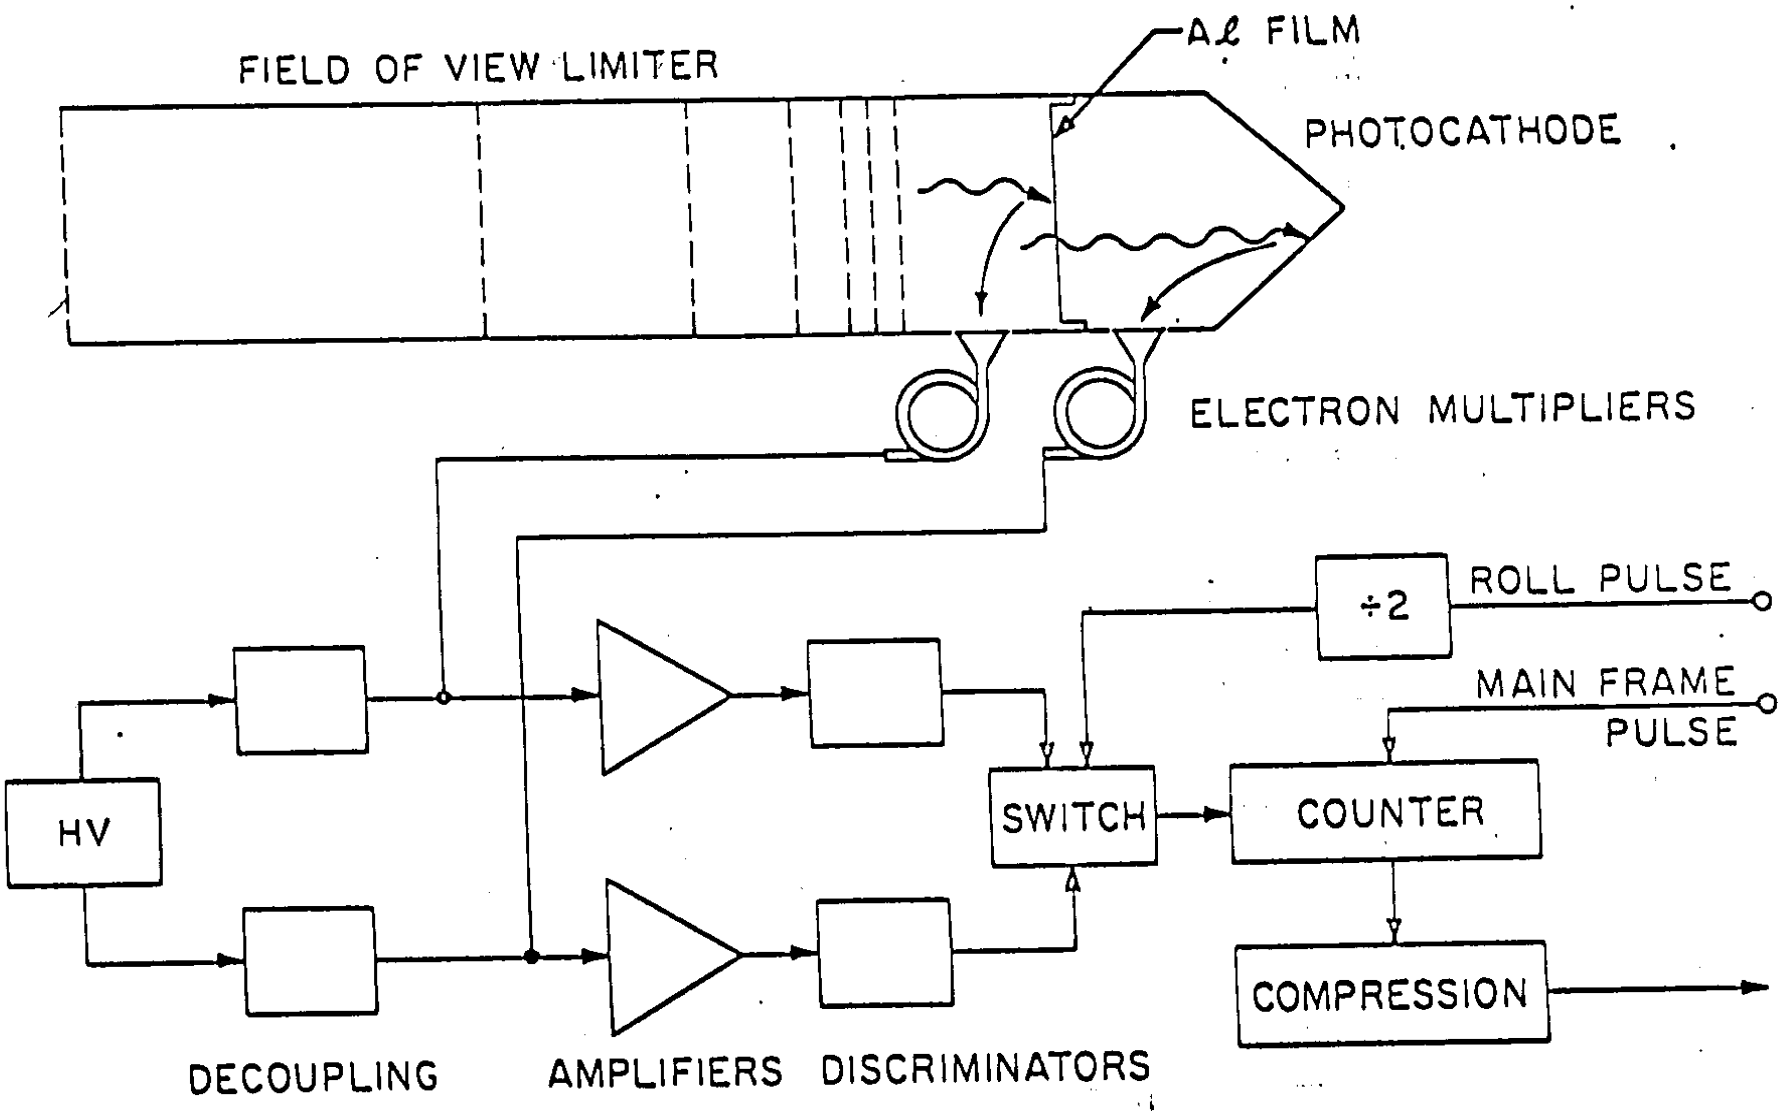

Figure 3. Schematic diagram of the UV instrument

TABLE 1

USC XUV PHOTOMETER INSTRUMENT PARAMETERS

Instrument Type:	Two channel XUV Photometer
Channels:	λ_L channel for emissions with $\lambda < 1400$ Å; λ_S channel for emissions with $\lambda < 800$ Å.
Field of View (FWHM):	1.15° x 9.3° (3.26×10^{-3} sterad)
Filter:	Thin film aluminum filter
Entrance Area:	1.67 cm^2
Geometric Thruput:	434 photons sec^{-1} $Rayleigh^{-1}$
Sensitivity:	4.9 counts/sec-R (Lyman-α) 7.2 counts/sec-R (HeI λ584 Å)
Photocathode:	Aluminum (Lyman-α), LiF (He)
Sensors:	Bendix model 4028 channeltrons (2)
Weight:	650 grams
Power:	650 mW
Data Storage:	19 bits, compressed to 9 bits floating point
Electronics:	Pulse counting electronics; 3.75 kV high voltage supply; Low-voltage power conditioning unit; Compressed-storage logic; Piston actuator--Dust cover removal system.

B. LIST OF REPORTS

The following reports have been prepared describing our Pioneer 10/11 observations and our theoretical results related to the analysis and interpretation of the Pioneer data. These include our work on the interplanetary physics as well as our study of the local environments of Jupiter and Saturn.

(a) "Pioneer 10 Observation of the Ultraviolet Glow in the Vicinity of Jupiter," Science 183, 317 (1974), D. L. Judge and R. W. Carlson.

This report describes the preliminary Pioneer 10 encounter results, particularly the first observation of helium in the atmosphere of Jupiter and the discovery of a hydrogen cloud orbiting Jupiter.

(b) "Initial Pioneer 10 Results on the Interplanetary and Interstellar Hydrogen and Helium Glow," Winter Meeting, A.P.S., Los Angeles, 1972, D. L. Judge, R. W. Carlson, K. Suzuki, and A. L. Morse.

The report deals with the interplanetary glow and the first positive evidence for interplanetary He emissions. The flow direction ($\alpha = 240°$) was discussed.

(c) "Pioneer 10 Ultraviolet Photometer Measurements of Interplanetary Hydrogen and Helium," Winter Meeting, AGU, San Francisco, 1973, D. L. Judge, R. W. Carlson, K. Suzuki, and A. L. Morse.

Additional parameters of the interplanetary gas were discussed, and the influence of self-reversed lines.

(d) "Results from the Pioneer 10 Ultraviolet Photometry Experiment," presented at the Palo Alto Meeting of the Division of Planetary Sciences, AAS, April 1974, R. W. Carlson and D. L. Judge. (Invited paper).

A more complete analysis of the Pioneer 10 encounter data was presented, particularly the Jupiter He/H_2 ratio and cloud dimensions.

(d) "Pioneer 10 Ultraviolet Photometer Observations at Jupiter," presented at the 55th Annual Spring Meeting of the AGU, Washington, D.C., April, 1974, R. W. Carlson and D. L. Judge. (Invited paper).

The Jupiter H_2/He ratio was presented along with the cloud results and a theory of the source and loss mechanisms involving the plasmasphere.

(f) "Possibility of OIIIλ304 Å Emissions in the Extreme Ultraviolet Airglow," Letter, J. Geophys. Res. 77, 6282 (1972), R. W. Carlson.

Based on terrestrial measurements, one of the possible components of the interplanetary glow observed by Pioneer 10 was thought to be due to He^+. This problem was examined and it was found that the interpretation of the terrestrial measurements can be confused by O^{++}.

(g) "Resonance Absorption of the Solar He λ584 Å Line by Telluric Helium," submitted to J. Geophys. Res., January, 1974, R. W. Carlson.

The problem of the solar He line profile is an extremely important one for the Pioneer measurements and was investigated using previous absorption measurements of the solar line.

(h) "Pioneer 10 Ultraviolet Photometer Observations at Jupiter Encounter," J. Geophys. Res. 79, 3623 (1974), D. L. Judge and R. W. Carlson.

The initial results from the Jupiter Encounter are analyzed in rather complete fashion.

(i) "Notes on the Density of Interplanetary Hydrogen," USC Internal Report (1974), R. W. Carlson.

The influence of the solar line shape on the interplanetary H trajectories and densities is analyzed.

(j) "Pioneer 10 Ultraviolet Photometer Observations of the Jovian Hydrogen Torus," presented at IAU Colloquium No. 28, Planetary Satellites, Ithaca, New York, August 1974, R. W. Carlson and D. L. Judge.

(k) "Preliminary Results from the Pioneer 11 Ultraviolet Photometer Experiment," presented at the Annual Fall Meeting of the AGU, San Francisco, Dec. 1974, D. L. Judge.

(l) "Atmospheres of Outer Planet Satellites," Exploration of the outer Solar System", MIT Press, 1975, R. W. Carlson.

(m) "Pioneer 10 Ultraviolet Photometer Observations of the Jovian Hydrogen Torus," Icarus, 29, 395, (1975), R. W. Carlson and D. L. Judge.

(n) "Pioneer 10 Observations of the Interplanetary Ultraviolet Glow," presented at Fall Meeting, Amer. Geophys. Union, San Francisco, 1975, K. Suzuki, R. W. Carlson, D. L. Judge and A. L. Morse.

(o) "The Profile and intensity of Solar HeI λ584 Å Line," presented at Fall Meeting, Amer. Geophys. Union, San Francisco, 1975, J. O. Maloy, R. W. Carlson, U. G. Hartmann, and D. L. Judge.

(p) "Pioneer 10 Upper Limits to Helium Ultraviolet Emissions from the Vicinity of Io," to be submitted to Icarus, R. W. Carlson and D. L. Judge.

(q) "Rocket-Borne Spectrometer for the Measurement of the Solar HeI 584λ A Line Shape," draft complete, USC Internal Report, J. O. Maloy, R. W. Carlson, U. G. Hartmann and D. L. Judge.

(r) "Design of a Rocket-Borne Radioactive-Source Ionization Gauge," USC Internal Report, 1975, R. W. Carlson and J. O. Maloy.

(s) "Review of Optimum Pulse Shaping Techniques for Pulse Height Analyzer Systems," USC Internal Report, 1975, J. O. Maloy.

(t) "On the Invertibility of Mutual Occultation Light Curves," presented at 1975 D.P.S. Meeting, Columbia, Md., February 1975, R. T. Brinkmann.

(u) "On the Invertibility of Mutual Occultation Light Curves," Icarus 27, 69 (1976).

(v) "Pioneer measurements of the Jovian satellites," presented at the Fall meeting, Amer. Geophys. Union, San Francisco, 1975, D. L. Judge, R. W. Carlson, F. M. Wu, and U. G. Hartmann.

(w) "Electron Impact Ionization of Io's Sodium Emission Cloud," Geophys. Res. Lett. 2, 469 (1975), R. W. Carlson, D. L. Matson, and T. V. Johnson.

(x) "Pioneer 10 Ultraviolet Photometer Observations of Jupiter: the Jovian Helium to Hydrogen Ratio," presented at the Tucson meeting, IAU Coll. No. 30, Aug. 1975, R. W. Carlson and D. L. Judge.

(y) "The Problem of Hydrogen at Io," presented at the Division for Planetary Sciences (AAS) meeting, Austin, Texas, April, 1976, R. W. Carlson and D. L. Judge.

(z) "Pioneer Ultraviolet Photometer Measurements of the Jovian Satellites," presented at the Tucson meeting, IAU Coll. No. 30, Aug., 1975, D. L. Judge, R. W. Carlson, U. G. Hartmann, and F. M. Wu.

(aa) "Pioneer 10 Ultraviolet Photometer Observations of Jupiter: the Jovian Helium to Hydrogen Ratio," Jupiter, University of Arizona Press, 1976, R. W. Carlson and D. L. Judge.

(bb) "Sodium D-Line Emission from Io: Line Profiles and Synoptic Observations," presented at the Division for Planetary Sciences (AAS) Meeting, Austin, Texas, April 1976, D. L. Matson, R. W. Carlson, J. T. Bergstralh, J. W. Young, and T. V. Johnson.

(cc) "Pioneer Ultraviolet Photometer Measurements of the Jovian Satellites," Jupiter, University of Arizona Press, 1976, D. L. Judge, R. W. Carlson, F. M. Wu and U. G. Hartmann.

(dd) "Io's Atmosphere and Ionosphere; New Limits on Surface Pressure from Plasma Models," presented at the Division for Planetary Sciences (AAS) Meeting, Austin, Texas, April 1976, T. V. Johnson, D. L. Matson, and R. W. Carlson.

(ee) "Io's Atmosphere and Ionosphere; New Limits on Surface Pressure from Plasma Models," Geophys. Res. Lett., 3, 293 (1976), T. V. Johnson, D. L. Matson and R. W. Carlson.

(ff) "Europa: Ultraviolet Emissions and the Possibility of Atomic Oxygen and Hydrogen Clouds," Astrophy. J., 225, 325 (1978), F. M. Wu, D. L. Judge and R. W. Carlson.

(gg) "Electron heating of interplanetary medium," Astrophy. J., 225, 1045 (1978), F. M. Wu and D. L. Judge.

(hh) "Europa: Ultraviolet Emissions and the possibility of Atomic Oxygen and Hydrogen Clouds", presented at the Fall Meeting, American Geophys. Union, San Francisco, 1977, D. L. Judge, F. M. Wu and R. W. Carlson.

(ii) "Electron Heating of Interplanetary Medium" presented at the Fall Meeting, Amer. Geophys. Union, San Francisco, 1977, F. M. Wu and D. L. Judge.

(jj) "Pioneer 10 UV Photometer Observations of the Interplanetary Glow at Heliocentric Distances from 2 to 14 AU," submitted to Astrophys. J., 1980, F. M. Wu, K. Suzuki, R. W. Carlson and D. L. Judge.

(kk) "Temperature and Flow Velocity of the Interplanetary Gases Along Solar Radii", 1979, Ap. J. 231, 574 (1979), F. M. Wu and D. L. Judge.

(ll) "Modification of Solar Lines Propagating Through the Interplanetary Medium" J. Geophys. Res., 84, 1979, F. M. Wu and D. L. Judge.

(mm) "UV Observations" presented at Chapman Conference on Jovian Magnetsphere-Satellite, Los Angeles, California, June 27, 1978, R. W. Carlson.

(nn) "Temperature and Flow Velocity of Interplanetary Gas Along Solar Radii and the Resulting Modification of Solar Lines Propagating Through the Interplanetary Medium", presented at the Fall Meeting, American Geophys. Union, San Francisco, 1978, F. M. Wu and D. L. Judge.

(oo) "Pioneer 10 UV Photometer Observations of the Interplanetary Glow at Heliocentric Distances from 2 to 17 AU" presented at the Spring Meeting, American Geophys. Union, Washington, 1979, F. M. Wu and D. L. Judge.

(pp) "Extreme Ultraviolet Observations of Astrophysical Plasma" presented at U.S.-Japan Seminar on Plasma Spectroscopy, Kyoto, Japan May 7-11, 1979, D. L. Judge; also published in the proceedings.

(qq) "A Reanalysis of the Observed Interplanetary Hydrogen Ly-α Emission Profiles and the Drived Local "Interstellar" Gas Temperature and Velocity, Astrophys. J., 1980, F. M. Wu and D. L. Judge. (in press).

(rr) "Pioneer 11 Ultraviolet Photometer Measurements of the Saturn System" presented at Fall Meeting of the AGU, San Francisco, December 3 to 7, 1979, D. L. Judge, F. M. Wu and R. W. Carlson. (Invited paper).

(ss) "Pioneer 11 Ultraviolet Photometer Measurements of the Saturn System", presented at the 11th Annual DPS/AAS Meeting, Clayton, Missouri, October 23-26, 1979, D. L. Judge, F. M. Wu and R. W. Carlson. (Invited paper).

(tt) "Ultraviolet Photometer Observations of the Saturnian System", Science 207, 431 (1980), D. L. Judge, F. M. Wu and R. W. Carlson.

(uu) "Observations of Extreme Ultraviolet Emissions from the Saturnian Plasmasphere", submitted to J. Geophys. Res. 1980, F. M. Wu, D. L. Judge and R. W. Carlson.

C. INTEGRATION PERIODS

The period during which counts are accumulated depends upon both the spacecraft data rate and the mode. The following table (Table 2) gives these integration periods in seconds for the corresponding modes and bit rates.

TABLE 2. Data Sampling Rate for Science Subcomm Words

Bit Rate (bps)	Mode	
	A or B	with D1, D2, or D3
16	12 sec	24 sec
32	6	12
64	3	6
128	3/2	3
256	3/4	3/2
512	3/8	3/4
1024	3/16	3/8
2048	3/32	3/16

Both the mode and bit-rate are available in the EDRs (see Part III, Section D)

D. DATA DECOMPRESSION

As mentioned above, the counts accumulated in one integration period are quasi-logarithmically compressed. These counts are transmitted as three - 3 bit words (words 55, 56, 57). To recover the numerical count, one uses the algorithm

IF X = 0; then counts = C;

ELSE COUNTS = $(32 + C) * (2^{15-X})$;

where C is the first five bits of the concentration of words 55, 56 and 57, and X is the last four bits. These relationships are illustrated in Fig. 4.

SPACECRAFT WORDS

55			56			57		
2^4	2^3	2^2	2^1	2^0	2^3	2^2	2^1	2^0
X_5	X_4	X_3	X_2	X_1	Y_4	Y_3	Y_2	Y_1
		C					X	
FRACTION						EXPONENT		

INSTRUMENT WORDS AND BIT WEIGHTING

IF $X = 0$: "COUNTS" = C

IF $X \neq 0$: "COUNTS" = $(32 + C)\,[2^{(15 - X)}]$

Fig. 4. Algorithm to Decompress Telemetry Data

E. INSTRUMENT TIMING

The timing relationships in the instrument are determined by the spacecraft telemetry system, using a "phantom word gate" (PWG) which occurs once during each A and B format. The PWG initiates the following functions:

a) inhibits the counter

b) compression and transferring the accumulated counts to a buffer for telemetry readout

c) switches channels, depending upon the channel status bit (see below)

d) starts a new integration period.

The telemetry frame consists of 64 words, each 3 bits long, for a total of 192 bits. The format is shown in Fig. 5. The phantom word gate occurs at the beginning of word 29. The data count accumulated during the previous integration period is transmitted in words 55, 56, and 57 (see Fig. 4).

During portions of the mission, a shared format is used; A or B alternating with D1 or D2. In this case, the frame time is doubled, but the bit separation between the PWG, the data readout, and the start of that frame remain the same. Fig. 6 illustrates the timing relationships for these share formats.

The variable names used in Fig. 6 are derived from the USC UVP data reduction program (see IV). Explanations and relationships among these variables are given below:

BPS - an indicator for the bit rate, (word 7 of File 4)

BIT-RATE = the bit rate in bits per sec.

$= {}_2(\text{BPS} + 4)$

BIT-PER = 1/bit-rate

FRAME-PER = the integration time

= 192 * BIT-PER (Formats A, B)

= 384 * BIT-PER (Formats A, B + D)

DEL-TIME = The time (in misec) between the start of our integration period and the start of the telemetry frame for readout of that data.

= 108,000 * BIT-PER (Format A, D)

= 108,000 * BIT-PER + FRAME-PER (Format A, B & D)

DEL-TIME-PRIME = The time (in msec) between the middle of an integration period and the start of the telemetry frame during which these data are transmitted.

= 12,000 * BIT-PER (Format A, B)

=108,000 * BIT-PER (Format A, B & D)

RIP-TIME = Time of occurrence of a roll index pulse (RIP)

The channel (short or long wavelength) being integrated is controlled by roll index pulses (RIP) from the spacecraft, which occur once per roll when the UVP clock angle is -95.3° with respect to the ecliptic plane. The spacecraft rotates CCW as viewed from the Earth; for the UVP zero degrees occurs when the field-of-view ascends through a plane parallel to the ecliptic. Channel switching occurs at the PWG which occurs after every other RIP. Whenever a roll indix pulse occurs, a two state counter (the roll status, RS) is incremented by one.

F. CHANNEL AND ROLL ANGLE IDENTIFICATION

In general, we can recognize the two different channels by their relative counts; the long wavelength channel is almost always much higher in magnitude than the short-wavelength channel. A more mechanical method is available, however, to determine the appropriate channel identification which utilizes data contained in the subcommutated engineering data. Values of the channel

Fig. 5. Format A Word Assignment

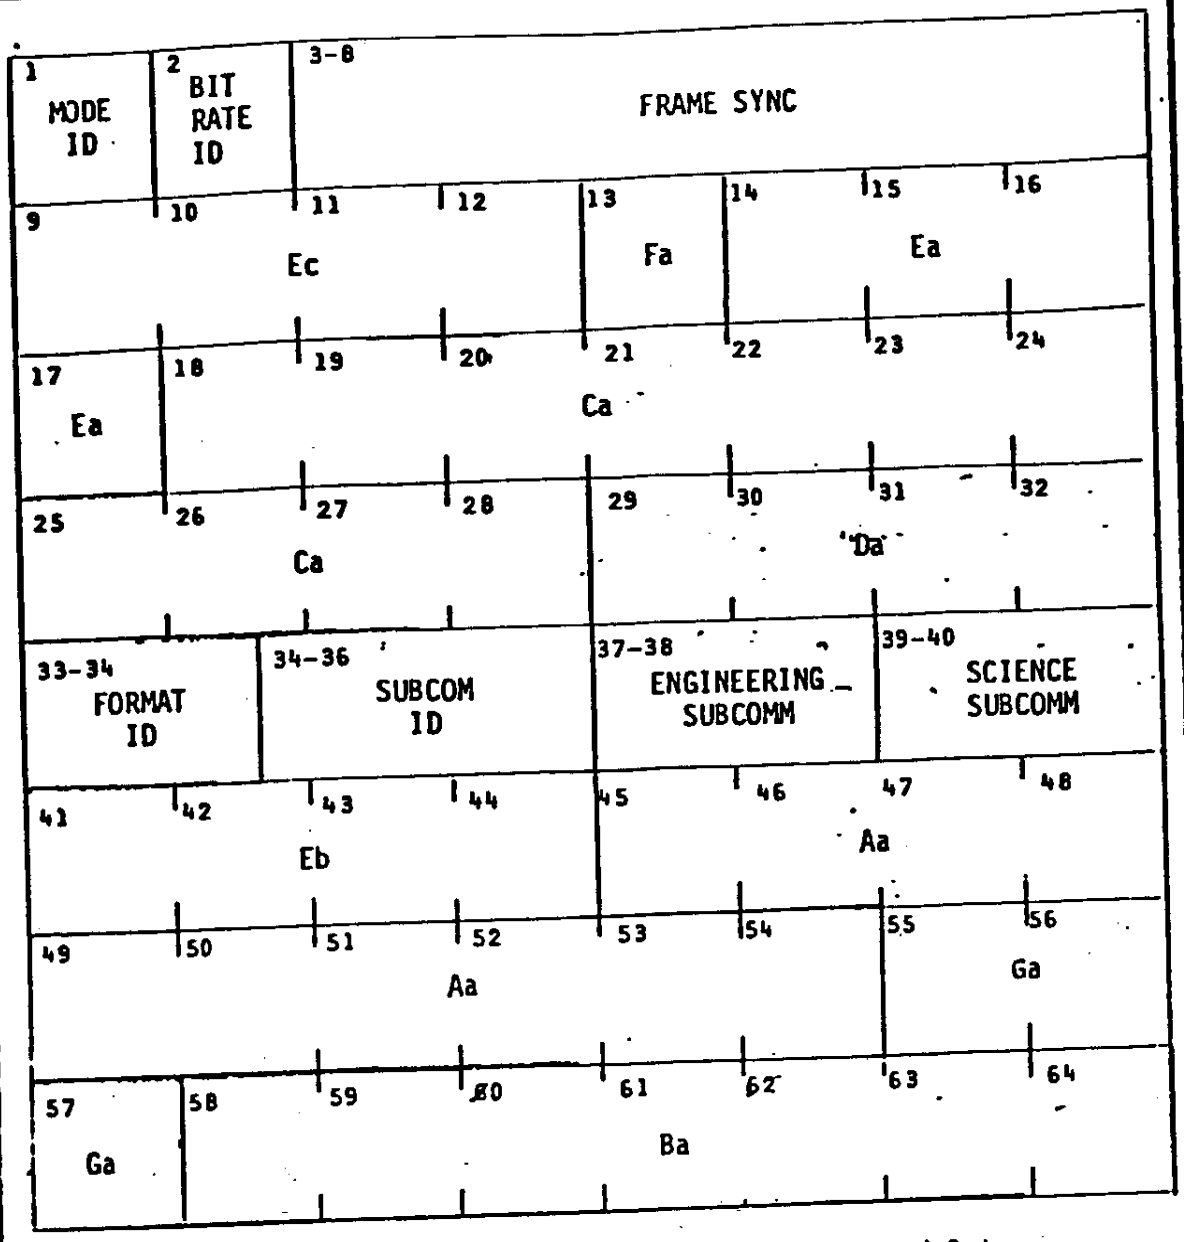

A - JPL Helium Vector Magnetometer
B - ARC Plasma Analyzer
C - U/Chicago Charged Particle Instr.
D - U/Iowa Geiger Tube Telescope
E - GSFC Cosmic Ray Telescope
F - UCSD Trapped Radiation Detector
G - USC Ultraviolet Photometer
H - U/Arizona Imaging Photopolarimeter
I - CIT Infrared
J - GE Asteroid/Meteoroid Det.
K - LaRC Meteoroid Detector

Phantom Word Gates

Da to Instrument G
Ea to Instrument B

Lower case letters denote separate data lines.

Fig. 6. Time Reference Definitions

- Counts are accumulated for a period of time corresponding to one effective TLM FRAME
- One TLM FRAME is from one PWG to the next PWG
- One effective TLM FRAME is one TLM FRAME except in 'D' format where it equals two TLM FRAMES because alternate PWG's are skipped
- One TLM FRAME = 192 BIT TIMES

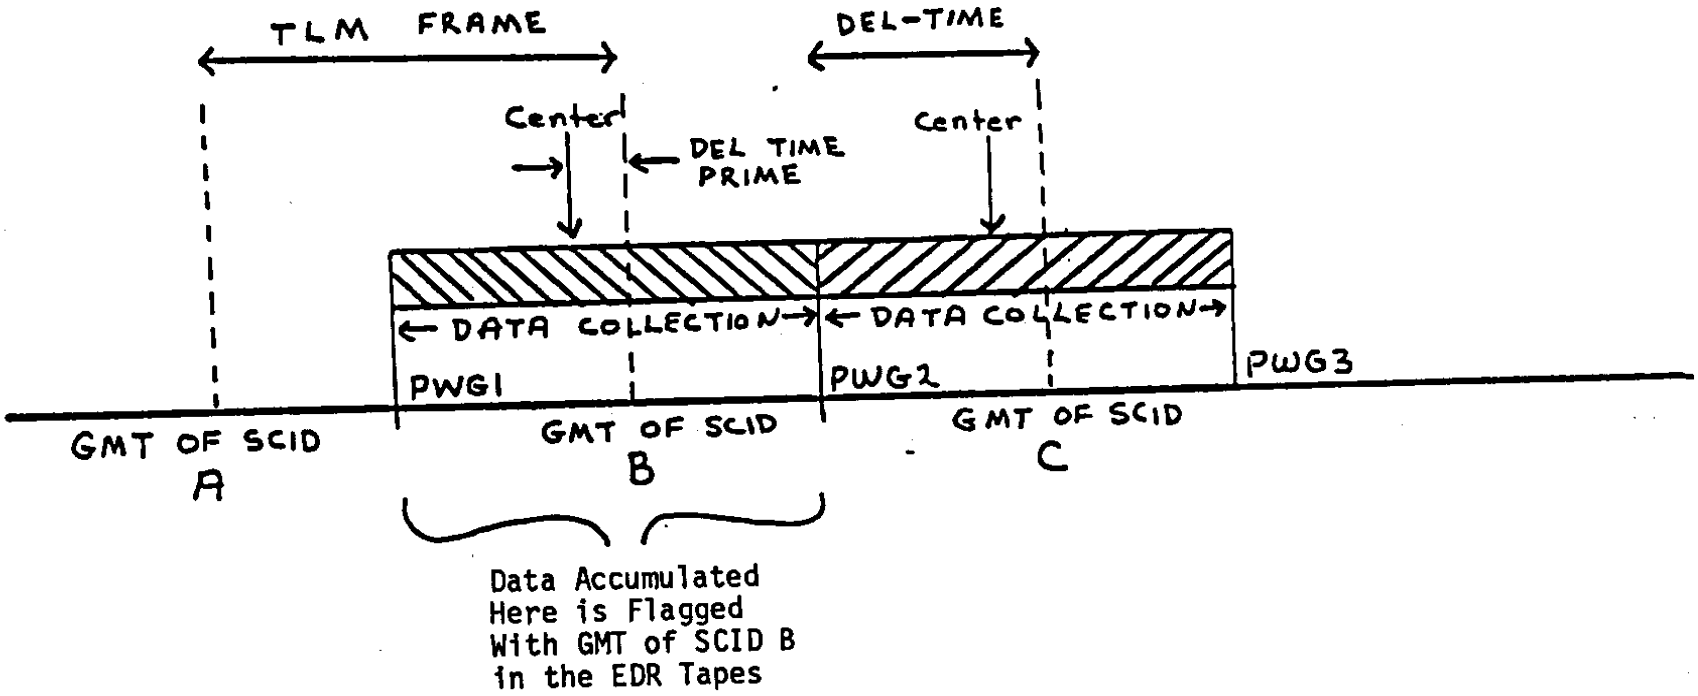

status and roll status are transmitted in the engineering telemetry, being the last two bits of subcomm words 124 and 224 (see Fig. 7). The engineering subcomm is transmitted in TLM words 37, 38. The roll status bit changes whenever a roll index pulse occurs, while the channel status changes only at the PWG occurring after two rolls. The telemetered value of the channel status is the channel currently accumulating data, which will be telemetered during the next T/M frame. In order to calculate the channel for other frames one must use roll altitude timer (RAT) and the spin period to predict the times of roll index pulses. The formula given in IV illustrates one way to accomplish this. Once the times of the RIP's are calculated, then the angles can be found knowing the spin rate and the center time of an integration period. This is also illustrated in the supplied program given in Part IV, Section B.

E-1

E109 (ANALOG)

Electronics Temperature (T5)

E-1 & E-2	S/C WORD	E124 & E224 (BILEVELS)					
	BITS	1	2	3	4	5	6
	BIT WEIGHTING					2^0	2^0

CS: CHANNEL STATUS

RS: ROLL STATUS

CHANNEL STATUS BIT: "0" = HELIUM-I = CHANNEL 1

"1" = LYMAN-ALPHA = CHANNEL 2

Fig. 7 FORMATS E-1 AND E-2 SPACECRAFT WORDS

II. PHYSICAL FORM OF THE DATA

A. INTRODUCTION

Experimental data is stored on 6250 BPI 9-track half-inch magnetic tape (2400' reels). Each tape contains a varying number of days' worth of data. One day of data consists of 4 data files called an Experiment Data Record or EDR. Further description of an EDR is given in Part III. A set of sequentially numbered tapes is provided for both the Pioneer 10 and 11 spacecraft. Each data tape is identified by a volume serial number or tape name. The tape name uses the following format:

Psnnn

where s = 'F' for Pioneer 10
= 'G' for Pioneer 11

and nnn= the tape number starting with oo1 and numbered sequentially.

For each data tape, a tape map or table of contents is given (see sections C and D). A map provides information about every data file stored on a tape, such as:

1) Volume serial number (Serial #)
2) Number of tracks (# Tracks)
3) Data file sequence number (Seq #)
4) The file's or data set's name (Date Set Name)
5) The julian date when the data set was created (Created)
6) The expiration date of the data set (Expires)
7) Whether the file is password protected (Security)
8) The name of the job that created the data set (Job Name)
9) The name of the step that created the data set (Stepname)
10) The recording format (RECFM) (F-always fixed)
11) The logical record length in bytes (LRECL)
12) The block size in bytes (BLKSIZE)
13) The recording density (Density) (6250BPI always)
14) The number of blocks in the data set (# Blocks)

The EDR files are stored in chronological order on the data tapes. The name of each file on the tape provides information about the time period covered. The format of each data set name is:

PsyyDddd.PppppFn

where
s = 'F' for Pioneer 10
= 'G' for Pioneer 11
yy = the year number
ddd = day of year
pppp = Pass number or number of days since launch
n = '1' File 1 - Logistics File
= '2' File 2 - Command File
= '3' File 3 - Spacecraft Attitude Data
= '4' File 4 - Experiment Data

(see Part III)

For example, a data set named PG73D096 P0001F3, indicates the data set contains the third data file for Pioneer 11. The time period covered is day 96 of 1973 and is the first day since launch.

All data tapes are IBM Standard Label, (SL), formatted tapes. A description of SL format is given in the next section.

B. STANDARD LABEL FORMAT

Data is stored on the tapes in physical groups, called files, that are separated by single tapemarks. A Standard Label, (SL) tape has three tape files associated with it: Header labels, the data file itself, and trailer labels. Each data file has a header file in front of it and a trailer file placed after it on the tape. Thus, the first data file is on tape file 2, the second data file is on tape file 5, etc. For the nth data set:

Header file for data set n is on tape file ((3*n)-2)

Data set n is on tape file ((3*n)-1)

Trailer file for data set n is on tape file (3*n)

The header and trailer files provide information about the data file they surround. All label files are written in EBCDIC. A partial description of a header file is given below:

First record, (the VOL1 record)

1) has VOL1 in the first four character positions.

2) has the volume serial number in the next six positions.

3) is 80 characters long.

Second record, (the HDR1 record)

1) has HDR1 in the first four character positions.

2) has a data set name of 17 or fewer characters in the next 17 positions.

3) has the volume serial name in positions 22-27.

4) has the sequence number of the file in positions 32-35.

5) is 80 characters long.

Third record, (the HDR2 record)

1) has HDR2 in the first four character positions.

2) has the record format in position 5.

3) has the block size in positions 6-10.

4) has the logical record length in positions 11-15.

5) has the density in position 16.

6) has the job name which created the file in positions 18-25.

7) has the job step which created the file in positons 27-34.

8) is 80 characters long.

Trailer labels are similar in format to the HDR1 and HDR2 records, but are called EOF1 and EOF2 records.

For files after the first file, there is no VOL1 record, but there is a tape mark before the HDR1 and after the HDR2 record. Following the last usable data set and its trailer labels there are two tape marks to signify the end of data on the tape. A typical tape contents could be as follows:

VOL1 record

HDR1 record

HDR2 record

TAPE MARK

Date for first file

TAPE MARK

EOF1 record

EOF2 record

TAPE MARK

HDR1 record

HDR2 record

TAPE MARK

Date for last file

TAPE MARK

EOF1 record

EOF2 record

TAPE MARK

TAPE MARK

Diagrams of label information and further explanation of tape data organization can be found in the IBM manuals, "OS/VS TAPE LABELS", (GC26-3795-2).

C. TAPE MAPS FOR PIONEER 10

The following pages are tape maps of Pioneer 10 experimental data. See section A for a description of a tape map. In some cases, some days have been lost, so a gap may appear in the listing of data sets on the tape. In addition, the first file of an EDR may have been lost. In this case a file name of NO. FIRST.FILE will be used to signify this fact.

III. EXPERIMENT DATA RECORD FORMATS

A. FILE 1 - LOGISTICS FILE

File 1 contains the logistics information. It consists of one physical record of 480 EBCDIC characters blocked into four logical records of 120 characters. The format is as follows:

CHARACTERS	CONTENTS
1 - 14	PIONEER x EDR (x = F (Pioneer 10) or G (Pioneer 11))
15 - 16	Number of acquisitions
17 - 30	ACQUISITIONS
31 - 39	USC/UV
40 - 46	S/C ID
47 - 48	Spacecraft number (23 = Pioneer 10, 24 = Pioneer 11)
49 - 59	GENERATED
60 - 67	mm/dd/yy (Date Tape Generated)
68 - 80	REGENERATED
81 - 88	mm/dd/yy (Date Tape Regenerated)
89 - 96	ddd/yy (day and year of data)
97 - 104	DSIF NO.
105 - 120	List of DSS that tracked during the EDR time period. The list will be the BCD conversions of the station codes shown in Table 3. The entries will consist of two characters and will be separated by commas.
121 - 134	TLM BIT RATES

CHARACTERS	CONTENTS
135-240	List of all the bit rates encountered on this EDR tape. The entires consist of four characters separated by commas. Note: See introduction for relationship between bit rate, format and instrument integration time.
241-252	TLM FORMATS
253-360	List of all formats contained on this EDR tape. The entires consist of five alpha characters and will be separated by commas. Note: See introduction for relationship between bit rates, format and instrument integration time.
361-366	MODES
367-380	List of all modes encountered on this EDR tape. The entries consist of three alpha characters and will be separated by commas. The usual entry is RT (Real Time).
381-391	START TIME
392-396	hh/mm (earth receipt time)
397-407	STOP TIME
408-412	hh/mm (earth receipt time)
413-431	TAPE SEQUENCE NO.
432-433	Tape sequence number
434-480	blanks

B. FILE 2 - COMMAND FILE

File 2 is the command file. Each physical record consists of ten logical records. A logical record has the following format. The first eight characters of logical record one will indicate the total number of commands in file 2. The remaining logical records will have the form:

Characters	Meaning
1 - 8	Blanks
9 - 30	Command 1
31 - 52	Command 2
53 - 74	Command 3
75 - 96	Command 4
97 - 118	Command 5
119 - 120	Blanks

Thus, each logical record contains 120 characters and each physical record will contain 1200 characters (ten logical records). The format of each command is as follows:

```
DDD HH MM SS CCCCC F

         1111111111222
123456789012345678901 2
```

Where:

DDD	- Day of year of command verification
HH MM SS	- EVT (see note)
CCCCC	- Command mnemonic The only ultraviolet photometer commands are instrument off (UVP0), instrument on (UVP9) and remove cover (UVP1)
F	- V = Command verified N = Command not verified C = Command unverifiable

NOTE: Time is the actual or expected verification time calculated as follows:

EVT (Multiple Commands) - Time of transmission of the 22nd bit of execute command + round-trip-light-time (RTLT) + Delay time.

EVT (Single Commands) - Time of transmission of the 22nd bit of execute command + RTLT

EVT (Verified Commands) - Actual verification time.

C. FILE 3 - SPACECRAFT ATTITUDE DATA

File 3 is binary and contains S/C attitude data for the past 31 days for which data is available. There is a ten word entry for each day. The first entry is the least current and the last entry is the most current. All words are right adjusted unless otherwise stated. Missing entries are filled with zeros.

(1) Word 1 (DOY) - Elapsed days since start of year

(2) Word 2 (GMT) - Elapsed time in milliseconds since start of day for time of first data word in record.

(3) Word 3 (SPARE) - Blanks.

(4) Word 4 (FLAG) - The flag interpretation is as follows:

00 =	Special Refinement	(± 0.1 degree accuracy)
01 =	High Gain Antenna	(± 1.3 degree accuracy)
10 =	Medium Gain Antenna	(± 1.3 degree accuracy)
11 =	Dynamic Position for Delta V Maneuver	(± 3.0 degree accuracy).

(5) Word 5 (CLON) - Ecliptic longitude (degrees) of the spin axis. 32 bit floating point.

(6) Word 6 (CLAT) - Ecliptic latitude (degrees) of the spin axis. 32 bit floating point.

(7) Word 7 (CKAH) - Clock angle of Sun (Helios) in degrees. 32 bit floating point.

(8) Word 8 (CKAS) - Clock angle of Star (Canopus) in degrees. 32 bit floating point.

(9) Words 9 - 10 (SPARE) - Blanks.

D. FILE 4 - EXPERIMENT DATA RECORD

File 4 contains the data from the USC/UV experiment. It consists of a varying number of 4300 32-bit word records. All words are right justified and binary unless otherwise stated.

(1) Word 1 (GMT) - Time in elapsed milliseconds from start of day for earth receipt time of the first data word in the record.

(2) Word 2 (Day of Year) - Self explanatory.

(3) Word 3 (TCF) - Time correction flag. The following codes are in binary: 0 = no correction, 111 = suspect time or corrected time.

(4) Word 4 (AREFSELS) - Reference Select Status - Two bits. Fill of all binary "ones" indicates value missing.

Bits 31 & 32	Meaning
00	Error
01	Clock angles determined by STAR sensor
10	Clock angles determined by SUN sensor B
11	Clock angles determined by SUN sensor A

(5) Word 5 (SNR) - (SIGNAL + NOISE)/NOISE in 32 bit floating point format.

(6) Word 6 (DSS) - Deep Space Station which was tracking. See table 3.

(7) Word 7 (BIT RATE) - Bit rate at which data record was taken. See table 4.

(8) Word 8 (MOD-FMT) - Mode and Format are two data values, three bits and five bits respectively, packed to form eight bits right justified of Word 8.

MODE: The following codes are binary:

000 or 001 = real time;

100 or 101 = telemetry store;

010 or 011 = memory readout

See table 5.

(9) Word 9 (RTLT) - Round Trip Light Time will be given in total milliseconds.

(10) Word 10 (ESC Subcom ID) - The Extended Frame Counter will be a combined word from the S/C telemetry of both the subcommutator identification word and the extended frame counter word. Together they comprise a counter from 0 to 8191.

(11) Word 11 (ASTDLYC) - Star Delay Time (1/256 second resolution) in DN. Twelve bits with telemetry bits reversed to give proper bit weighing. Fill of all binary "ones" indicates value missing.

(12) Word 12 (FLAG1, FLAG2, FLAG3, FLAG4) - These are flags for RAT, ASPNPDC, SPF, and ARIPPHEC, respectively. Each flag is eight bits. Flag values are: 0 = OK, 1 = old value, 10 = missing value, and 11 = corrected value.

(13) Word 13 (RAT - Roll Attitude Timer) - This time permits correlation of the attitude of the roll index reference line with given telemetered science and engineering data. The word is 32 bit floating point.

(14) Word 14 (ASPNPDC - Spin Period) - The time between two successive roll pulses of the spacecraft. 32 bit floating point.

(15) Word 15 (SPF) - Flag for spin period (three bits). If low order is 0, then SPSG (Spin Period Sector Generator) roll reference = 0 degrees, if set to 1 = 180 degrees.

Bits 2 and 3	SPSG Modes
00	Non-Spin Averaging
01	ACS
10	Spin averaging

(16) Word 16 (ARIPPHEC - Roll Pulse/Roll-Index Pulse Phase Error) - The phase error measurement between the Roll Pulse and the Roll-Index Pulse with up to a maximum of 60 milliseconds of phase error, generated by the Spin Period Sector Generator (SPSG). Represented in a 32 bit floating point format.

(17) Word 17 (Time of Roll Attitude Timer) - GMT that Roll Attitude Timer word was received. All binary "ones" indicates time was missing.

(18) Word 18 (DC Bus Voltage) - Range 26 to 30 VDC. 32 bit floating point format. All binary "ones" indicates value was missing.

(19) Word 19 (DC Bus Current) - Range 0 to 6 Amperes. 32 bit floating point format. All binary "ones" indicates value was missing.

(20) Word 20 (POWER STATUS/GMT of Power Status) - The USC/UV Instrument's power status is located in Bit 5 of Word 20. 1 = power on, 0 = power off. GMT of power status word receipt is located in Bits 6 - 32 of Word 20. If Word 20 is all binary "ones", the power status was missing for this subcom cycle.

(21) Word 21 (PT - S/C Platform Temperature #5) - -20 degrees F to 110 degrees F. 32 bit floating point format. All binary "ones" indicates PT was missing for this subcom cycle.

(22) Word 22 (F, DQ) - Bit 1 of Word 22 is the fill indicator. Bits 2 and 3 are the data quality indicators. For bit definitions see table 6.

(23) Word 23 (DATA WORD) - Bits 1 - 2 are fill; Bits 3 - 8 correspond to subcommutated engineering data when related to the ultraviolet photometer; Bits 9 - 16 are mainframe word 55; Bits 17 - 18 are filler; Bits 19 - 24 are mainframe words 56 and 57; Bit 25 is a filler; Bits 26 -32 is the SCID number. (Subcommutator identification).

The three 3-bit mainframe words, when concatenated, represent the number of counts per integration period according to the algorithm given in the introduction.

Repeat words 22, 23	for words 24-277
Repeat words 12-278	for words 278-543
Repeat words 12-278	for words 544-809
Repeat words 12-278	for words 810-1075

TABLE 3. DSS Codes (Source Codes)

DSS Tracking Station	Value (Binary)
DSS 11	00001011
DSS 12	00001100
DSS 14	00001110
DSS 21	00010101
DSN SIMULATION CENTER (SIMCEN) (DSS 27)	00011011
DSS 41	00101001
DSS 42	00101010
DSS 51	00110011
DSS 61	00111101
DSS 62	00111110
DSS 71	01000111
CAPE BUILDING AO (DSS 70)	01000110
SFOF (DSS 00)	00000000
MERRITT ISLAND MSFN (MIL) (DSS 90)	01011010
USNS VANGUARD MSFN (VAN) (DSS 91)	01011011
BERMUDA MSFN (BDA) (DSS 92)	01011100
ASCENSION MSFN (ACN) (DSS 93)	01011101
CANARY ISLAND MSFN (CYI) (DSS 94)	01011110
BOULDER, COLORADO (DSS 99)	01100011

TABLE 4. Rate of Data Transmission from Spacecraft (BINARY)

VALUE (BINARY)	BCD	RATE IN BITS PER SECOND
0000	0	16
0001	1	32
0010	2	64
0011	3	128
0100	4	256
0101	5	512
0110	6	1024
0111	7	2048

TABLE 5. Format ID Assignments

FORMAT ID	BCD	FORMAT
0100-	8 or 9	A
0000-	0 or 1	B
0X100	4 or 12	C 1
0X101	5 or 13	C 2
0X110	6 or 14	C 3
0X111	7 or 15	C 4
11000	24	D1 WITH A
10000	16	D1 WITH B
11001	25	D2 WITH A
10001	17	D2 WITH B
11010	26	D3 WITH A
10010	18	D3 WITH B

- = DON'T CARE STATE (MAY BE ONE OR ZERO)

X = 1 WHEN ROTARY C (OPERATIONALLY FORCED)

TABLE 6. Quality Indicator (BINARY)

VALUE (BINARY)	BCD	MEANING
11	3	ALL INDICATORS ARE GOOD, DATA IS GOOD
10	2	AT LEAST ONE INDICATOR IS BAD, DATA IS SUSPECT
01	1	AT LEAST TWO INDICATORS ARE BAD, DATA IS SUSPECT
00	0	DATA IS BAD - NO SYNC

This value is computed by the following logic:

QI = FS(1 + S + H), where:

FS = 1 if Data Stream is in SYNC in 360

0 if Data Stream not in SYNC

S = 1 if Average SNR over frame is >= a specified minimum

0 if Average SNR over frame is < a specified minimum

H = 1 if HSD BLOCK was received with no error indicators

0 if any bit errors were detected in HSD BLOCK

E. Binary Data Representation

Floating Point Number - A floating point number consists of a signed hexadecimal fraction and an unsigned seven-bit binary integer called the characteristic. The characteristic represents a signed exponent and is obtained by adding 64 to the exponent value (excess-64 notation). The range of the characteristic is 0 to 127, which corresponds to an exponent range of -64 to 63. The value of a floating point number is the product of its fraction and the number 16 raised to the power of the exponent which is represented by its characteristic.

The fraction of a floating point number is treated as a hexadecimal number because it is considered to be multiplied by a number which is a power of 16. The radix point is assumed to be immediately to the left of the leftmost fraction digit. The fraction is represented by its absolute value and a separate sign bit. The entire number is positive or negative depending on whether the sign bit of the fraction is zero or one, respectively.

Example: Convert 59.25 to a floating point number

1) The number is split into a decimal integer and fraction 59.25 = 59. + 0.25

2) The decimal integer is converted to hexadecimal $59_{10} = 3B_{16}$

3) The decimal fraction is converted to hexadecimal $0.27_{10} = 0.4_{16}$

4) The integral and fractional parts are combined and expressed as a fraction times a power of 16. $3B.4 = 03B4 * 16^2$

5) The characteristic is developed from the exponent and converted to binary

   Base + exponent = characteristic

   64 + 2 = 66 = 1000010 (binary)

6) The fraction is converted to binary and grouped hexadecimally

   0.3B4 = 0011 1011 0100 (binary)

7) The characteristic and the fraction are stored in the format below

```
     S Char     Fraction
     0 1000010 00111011010 0000 0000 0000 0000
bits 0 1     7 8                            31
```

Signed binary integers - The leftmost bit (bit 0) is the sign of the number. A one in bit 0 represents a negative number. The remaining bits (1-31) are used to designate the magnitude of the number. The radix point is considered to be fixed at the right. Positive binary integers are in true binary rotation with a zero sign bit. Negative integers are in two's complement notation with a one bit in the sign bit.

Example: $35_{10} = 23_{16}$

S Magnitude

0000 0000 0000 0000 0000 0000 0010 0011

bits 0 31

Further documentation may be found in IBM manual, "OS/VS-DOS/VS-VM/370 Assembler language", GC33-4010-4

IV. A SAMPLE DATA PROCESSING PROGRAM FOR PIONEER USC/UV DATA

A. INTRODUCTION

The Pioneer 10 and 11 data tapes supply information containing the attitude of the spacecraft and the timing of various parameters. These must be decoded so the clock angle and the data channel for each data point can be determined.

The paragraphs which follow describe the method used. The variable names refer to those used within the USC PL-1 data processing program.

General Description

The data is within a repeating data block 192 bits long. Within each such block there is;

1. GMT-of-SCID, time in ms (absolute within day) corresponding to the start of that frame.
2. Data value.
3. ID number, fill indicator, data quality indicator.

The spacecraft can transmit at various bit rates so the length of these frames is of constant length in bits, not time. In addition to the pattern of data frames there are Roll Index Pulses (RIPS) occurring every spin period. Enough data is provided to calculate the RIP time.

Data Time Determination

In non-shared data format the following number variables have these values:

FRAME-PER ≡ time required for 192 bits

DEL-TIME ≡ time between a data frame boundary (GMT-of-SCID) and the previous phantom word data.

≡ 108 bit timer.

DEL-TIME-PRIME ≡ time between a data frame boundary and the present center of data collection period ≡ 12 bit times.

In shared format data is transmitted every other frame so these variables have the same definition, only different numerical values.

FRAME-PER = 384 bit times

DEL-TIME = 300 bit times

DEL-TIME-PRIME = 108 bit times

Data is gathered for the length of the frame (192 bits), however, the counters do not reset at the frame boundaries. Instead the counters reset at the Phantom Word bate (PWG). The PWG's are 84 bit times after the frame boundary.

For each GMT-of-SCID there is a data value. The GMT-OF-SCID associated with a data value is the last (only is non shared format) such frame boundary to occur during a data collection period (between PWGs). This is the example in Fig. 6. The GMT-OF-SCID B is associated with the first data gathered region value. There must be a time associated with each data point which corresponds to the exact collection time. The center of each collection period was chosen. Thus, subtracting DEL-TIME-PRIME from GMT-OF-SCID gives a time in ms which corresponds to the center of the data collection interval.

Channel Determination

Superimposed on the data frame pattern are RIPS. These occur once each spin period. These two patterns are asynchronous. When a RIP occurs the CSRS (channel states, roll status) variable is incremented by one, after the end of the present data gathering cycle (i.e. at the next PWG). When the second bit of the CSRS changes (every other roll, the channel is switched between Hydrogen and Helium.

The value for CSRS is supplied once every 32 frames. The RIP-TIME is calculated from data supplied on the tape;

RIP-TIME = GMT-OF-C112 = 1000.0 * RAT + PE

RHT = Roll Attitude times (sec)

PE = Phase Error (ms)

The next predicted rip time is calculated by adding the spin period (SP) to the RIP-TIME. These two variables are called LAST-RIP and NEXT-RIP.

Because of the slight uncertainties in these values, there is a region around each Phantom Word Gate where ambiguities exist. If a RIP occurs "very near" a PWG the channel may or may not change before that data gathering period. The half width of this error window is called RIP-TOL, and another variable RIP-TOL-2 is the full width.

The data tapes contain GMT-OF-SCID, not PWG times, so if the constant DEL-TIME = 108 bit times is added to the RIP-TIME, the result is a projected rip time in a "GMT-OF-SCID reference system". The variables NR1 and NR2 are just these values. They represent the limits of the error window within the GMT-OF-SCID Reference.

Example (See Fig. 8)

Case A, Fig. 8. If the Rip Time is at point A, then $NR1_A$ and $NR2_A$ both are earlier than GMT-OF-SCID at D. This data from D belongs to the new CSRS.

Case B, Fig. 8. A RIP at point B implies $NR1_B$ and $NR2_B$ are both later than GMT-OF-SCID. Data belongs to old CSRS.

Case C, Fig. 8. A RIP at point C would cause $NR1_C$ and $NR2_C$ to be on opposite sides of GMT-OF-SCID. CSRS should be incremented, and this data point ignored.

Angle Determination

The clock angle of each data point is expressed as a bin number 1 to 128. There is a constant angle offset for each data point. This is because:

1) The USC instrument has a clock angle of -95.3°

2) The exact direction at the time of a RIP is not always the same.

The variables used in this calculation are

DEL-ANGLE = -95.3 or = +180-95.3 as a function of the SPIN Period Sector Generator.

Fig. 8. RIP Time Determination

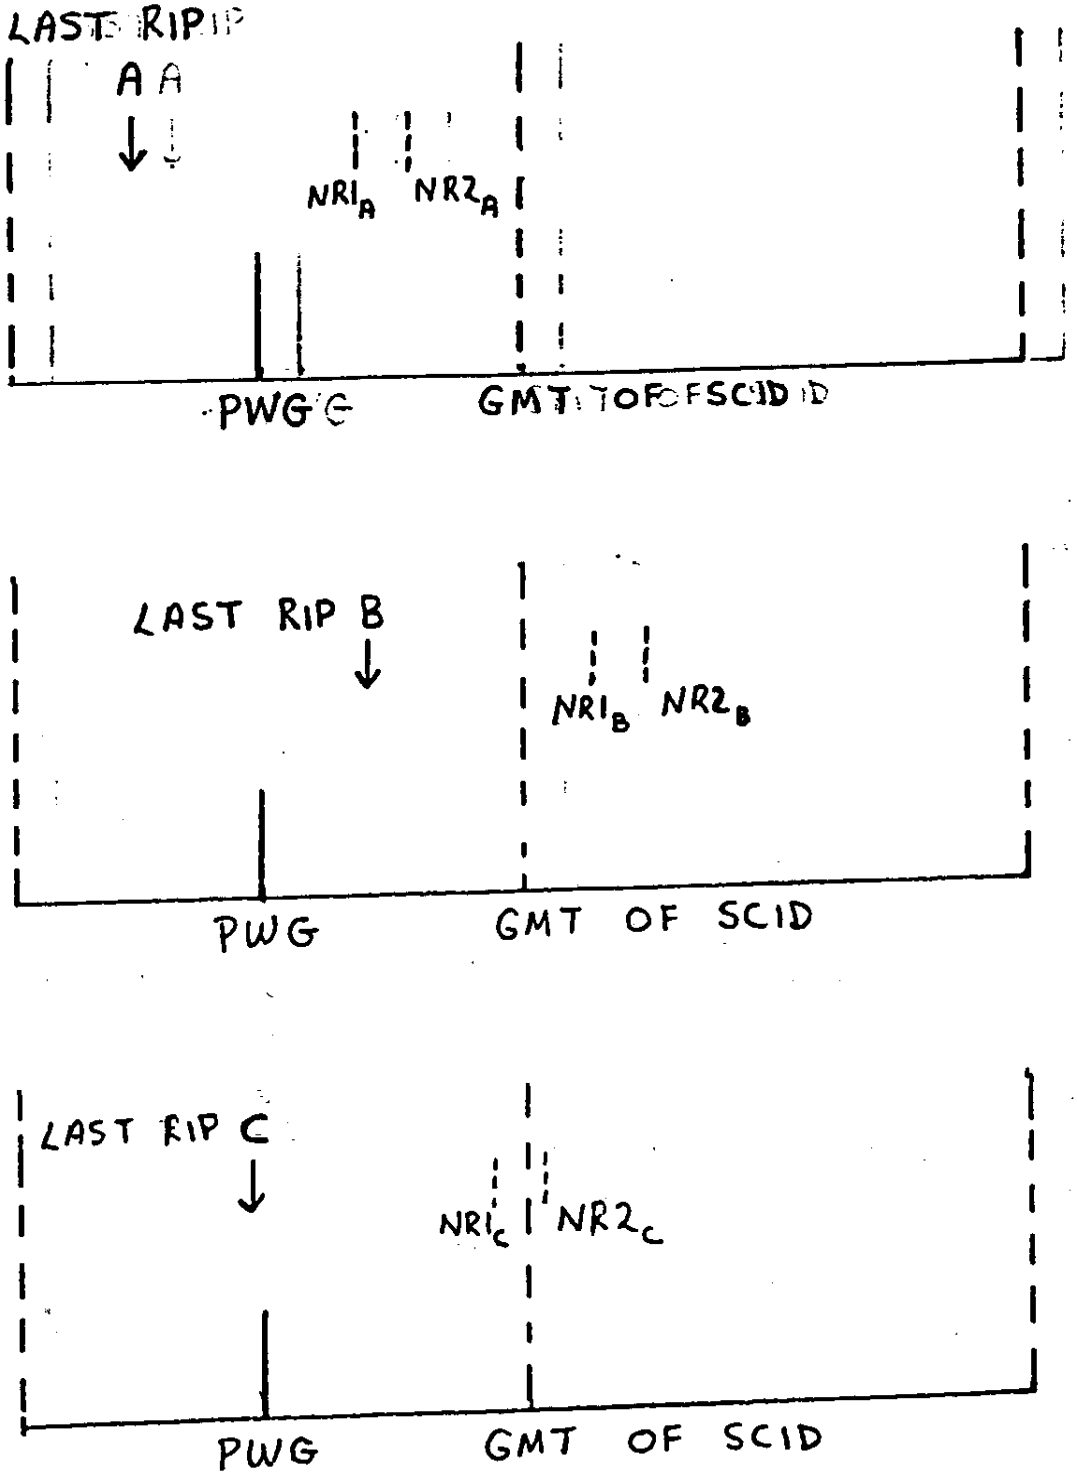

Delt 1 = CKAS (Day I) + 25 or = CKAH (Day I) as a function of a star being used for reference or not.

STK = Star-Delay * 1000.0/256.0 if a star is used (the numbers involved in STK convert the value to ms).

This offset is summed as an angle called DELT and a a number of bins called FANG. Notice that FANG is an integer. Care must be taken in rounding the original value to get an integer. BIN-1 = BIN 126 So the expression involving sign (Delt) and ABS must be used in PL1.

Assuming all offsets are accounted for in FANG, the RIP time represents a clock angle of 0°. So if the difference in time between a RIP and the center of a data gathering period is divided by the spin period, the result is the percentage of the entire circle. This ratio represents (bin number/128). Therefore the bin number can be calculated.

The variable LR is the last RIP time along with Del-Time-Prime (needed to convert GMT-OF-SCID to center of data interval, see section on Data time determination). Therefore GMT-OF-SCID-LR represents the time difference between the last RIP and the center of the data period. This time can be converted to an angle and to a bin number. Finally, the offset Fang, can be summed to produce a bin number for the data point. Mod arithmetic keeps the value 1 to 128.

Thus angle and channel assignment can be created for each data point.

B. LISTING OF THE COMPUTER PROGRAM

The following is a listing of the USC/UV computer program designed to process data from the Pioneer 10 and 11 data tapes. The program is written in PL/I, but can easily be modified in structure to be written into FORTRAN. The user is referred to the IBM manual "PL/I (F) Language Reference Manual" for more information on PL/I programming language.

SOURCE LISTING

```
STMT LEV NT

                    /* FRPA070.RPC01.UVPROG.CNTL(PROG) */                          00000010
                    /*PROGRAM TO PROCESS PIONEER 10/11 USC/UV PHOTOMETER DATA*/   00000020
                    /*PROGRAM TO PROCESS PIONEER 10/11 USC/UV PHOTOMETER DATA*/   00000030
  1       0         PROG:PROCEDURE OPTIONS(MAIN) REORDER;                          00000040
  2   1   0             DCL FILE1 FILE INPUT RECORD ENV(BUFFERS(1) F TOTAL         00000050
                          BLKSIZE(480));                                           00000060
  3   1   0               DCL 1 LOGISTICS,                                         00000070
                              2 HEADER1 CHAR(14),                                  00000080
                              2 ACQUISITIONS CHAR(16),                             00000090
                              2 HEADER2 CHAR(18),                                  00000100
                              2 GENERATION CHAR(48),                               00000110
                              2 DSIF CHAR(24),                                     00000120
                              2 BIT_RATES CHAR(120),                               00000130
                              2 FORMATS CHAR(120),                                 00000140
                              2 MODES CHAR(20),                                    00000150
                              2 TIMES CHAR(32),                                    00000160
                              2 SEQUENCE CHAR(21),                                 00000170
                              2 FILL1 CHAR(47);                                    00000180
  4   1   0             DCL FILE2 FILE INPUT RECORD ENV(BUFFERS(1) F TOTAL         00000190
                          BLKSIZE(1200));                                          00000200
  5   1   0               DCL 1 COMMANDS,                                          00000210
                              2 LOGICAL_RECORDS(10),                               00000220
                                3 N PICTURE'(8)9',                                 00000230
                                3 COMD(5) CHAR(22),                                00000240
                                3 FILL2 CHAR(2);                                   00000250
  6   1   0             DCL FILE3 FILE INPUT RECORD ENV(BUFFERS(1) F TOTAL         00000260
                          BLKSIZE(1240));                                          00000270
  7   1   0               DCL 1 TRAJ,                                              00000280
                              2 ENTRY(31),                                         00000290
                                3 DAY FIXED BIN(31),                               00000300
                                3 MSEC BIT(32),                                    00000310
                                3 FILL3 BIT(32),                                   00000320
                                3 FILL4 BIT(30),                                   00000330
                                3 FLAG BIT(2),                                     00000340
                                3 CLONG BINARY FLOAT(21),                          00000350
                                3 CLAT BINARY FLOAT(21),                           00000360
                                3 CKAH BIN FLOAT(21),                              00000370
                                3 CKAS BIN FLOAT(21),                              00000380
                                3 FILL5 BIT(64);                                   00000390
  8   1   0             DCL FILE4 FILE INPUT RECORD ENV(BUFFERS(1) F TOTAL         00000400
                          BLKSIZE(4300));                                          00000410
  9   1   0               DCL 1 UVDATA,                                            00000420
                              2 TRACK,                                             00000430
                                3 GMT FIXED BIN(31),                               00000440
                                3 DD FIXED BIN(31),                                00000450
                                3 TCF FIXED BIN(31),                               00000460
                                3 FILL6 BIT(30),                                   00000470
                                3 AREF BIT(2),                                     00000480
                                3 SNR BINARY FLOAT(21),                            00000490
                                3 FILL7 BIT(24),                                   00000500
                                3 DSS BIT(8),                                      00000510
                                3 FILL8 BIT(28),                                   00000520
                                3 BPS1 BIT(4),
```

```
S.MT LEV NT
                                                                                  00000530
                                  3 FILL9 BIT(24),                                00000540
                                  3 MODE BIT(3),                                  00000550
                                  3 FMT BIT(5),                                   00000560
                                  3 RTLT FIXED BIN(31),                           00000570
                                  3 ESC BIT(32),                                  00000580
                                  3 FILL10 BIT(20),                               00000590
                                  3 STAR_DELAY BIT(12),                           00000600
                                2 SUBCOM(4),                                      00000610
                                  3 SCRAFT,                                       00000620
                                    4 FILL11 BIT(6),                              00000630
                                    4 FLAG4 BIT(2),                               00000640
                                    4 FILL12 BIT(6),                              00000650
                                    4 FLAG3 BIT(2),                               00000660
                                    4 FILL13 BIT(6),                              00000670
                                    4 FLAG2 BIT(2),                               00000680
                                    4 FILL14 BIT(6),                              00000690
                                    4 FLAG1 BIT(2),                               00000700
                                    4 RAT BINARY FLOAT(21),                       00000710
                                    4 SPIN_PER BINARY FLOAT(21),                  00000720
                                    4 FILL15 BIT(29),                             00000730
                                    4 SPF BIT(3),                                 00000740
                                    4 PHASE_ERROR BINARY FLOAT(21),               00000750
                                    4 GMT_OF_C112 FIXED BIN(31),                  00000760
                                    4 BUS_VOLTAGE BINARY FLOAT(21),               00000770
                                    4 BUS_CURRENT BINARY FLOAT(21),               00000780
                                    4 FILL16 BIT(4),                              00000790
                                    4 C_124 BIT(1),                               00000800
                                    4 GMT_OF_C124 BIT(27),                        00000810
                                    4 PT BINARY FLOAT(21),                        00000820
                                  3 SCIENCE(128),                                 00000830
                                    4 F BIT(1),                                   00000840
                                    4 DQ BIT(2),                                  00000850
                                    4 GMT_OF_SCID BIT(29),                        00000860
                                    4 FILL17 BIT(2),                              00000870
                                    4 ENG BIT(6),                                 00000880
                                    4 FILL18 BIT(5),                              00000890
                                    4 WORD55 BIT(3),                              00000900
                                    4 FILL19 BIT(2),                              00000910
                                    4 WORD56 BIT(6),                              00000920
                                    4 FILL20 BIT(1),                              00000930
                                    4 SCID BIT(7);                                00000940
10    1    0              DCL FILE FILE OUTPUT RECORD ENV(BUFFERS(1) F TOTAL      00000950
                            BLKSIZE(1332));                                       00000960
11    1    0              DCL 1 OUTPUT,                                           00000970
                                2 HEADER1 CHAR(14),                               00000980
                                2 HEADER2 CHAR(18),                               00000990
                                2 FORMATS CHAR(120),                              00001000
                                2 TIMES CHAR(32),                                 00001010
                                2 FILL21 CHAR(8),                                 00001020
                                2 SNRA BIN FLOAT(21),                             00001030
                                2 START_TIME BIN FIXED(31),                       00001040
                                2 END_TIME BIN FIXED(31),                         00001050
                                2 TOTAL_TIME FLOAT BIN(53),                       00001060
                                2 FILL22 CHAR(88),                                00001070
                                2 AVERAGES(2),
```

```
MT LEV NT

                          3 MEANS(128),
                          4 MEAN FLOAT BIN(21),
                          2 FILL23 CHAR(2),
                          2 DOY FIXED BIN(31);
 12   1   0          DCL IDENT(26) CHAR(1) INITIAL('A','B','C','D','E','F','G','H',
                          'I','J','K','L','M','N','O','P','Q','R','S','T',
                          'U','V','W','X','Y','Z');
 13   1   0           DCL WORD FIXED BIN(15);
 14   1   0          DCL BIT_RATE BIN FIXED,
                         (BIT_PER,FRAME_PER,DEL_TIME) BIN FLOAT(53),
                         (DEL_TIME_PRIME,RIP_TIME,NEXT_RIP,LAST_RIP) BIN FLOAT(53),
                         (GMT_START,GMT_OF_SUBCOM) BIN FLOAT(53),
                         SP BIN FLOAT(53),
                         COUPER(2,128) BIN FLOAT,
                         NUM(2,128) BIN FLOAT,
                         INIT_TIME BIN FIXED(31),
                         CSRS BIN FIXED,
                         (FF1,FF3,FF4) BIN FIXED,
                         (NR1,NR2,[redacted],GMT_SCID) BIN FIXED(31),
                         (GMT_TEST1,GMT_TEST2) BIN FIXED(31),
                         (C,X) BIN FIXED,
                         (SIGNAL) BIN FIXED,
                         (RIP_TOL,RIP_TOL2,FANG) BIN FIXED(31),
                         SPSG BIT(3);
 15   1   0           DCL BPS FIXED BIN;
 16   1   0           DCL (IH,IM,IS) BIN FIXED(15);
 17   1   0           DCL START FIXED BIN;

 18   1   0         GET LIST (NO_OF_DAY);
 19   1   0         DO III=1 TO NO_OF_DAY;
 20   1   1         OPEN FILE(FILE1) TITLE('FILE'||IDENT(III));

 21   1   1          ON TRANSMIT(FILE1) GO TO F2;
 22   1   1          OPEN FILE(FILE1) TITLE('FILE1'||IDENT(III));
 23   1   1          READ FILE(FILE1) INTO (LOGISTICS);
 24   1   1          PUT SKIP EDIT(LOGISTICS.HEADER1,LOGISTICS.HEADER2)(A,A);
 25   1   1          PUT SKIP EDIT(ACQUISITIONS)(A);
 26   1   1          PUT SKIP EDIT(GENERATION)(A);
 27   1   1          PUT SKIP EDIT(OSIF)(A);
 28   1   1          PUT SKIP EDIT(BIT_RATES)(A);
 29   1   1          PUT SKIP EDIT(LOGISTICS.FORMATS)(A);
 30   1   1          PUT SKIP EDIT(MODES)(A);
 31   1   1          PUT SKIP EDIT(LOGISTICS.TIMES)(A);
 32   1   1          PUT SKIP EDIT(SEQUENCE)(A);

 33   1   1   F2:    CLOSE FILE(FILE1);
 34   1   1          ON ENDFILE(FILE2) GO TO F3;
 35   1   1          ON TRANSMIT(FILE2) GO TO F3;
 36   1   1          OPEN FILE(FILE2) TITLE('FILE2'||IDENT(III));
 37   1   1          READ FILE(FILE2) INTO(COMMANDS);
 38   1   1          PUT SKIP EDIT('NUMBER OF COMMANDS SENT=',N(1))(A,F(3));
```

```
MT LEV NT

39   1   1   F3:     CLOSE FILE(FILE2);
40   1   1           ON TRANSMIT(FILE3) GO TO F4;
41   1   1           ON ENDFILE(FILE3) GO TO F4;
42   1   1           OPEN FILE(FILE3) TITLE('FILE3'||IDENT(III));
43   1   1           READ FILE(FILE3) INTO(TRAJ);
44   1   1           PUT SKIP EDIT('ALTITUDE DATA')(A);
45   1   1           DO I=1 TO 31;
46   1   2            PUT SKIP EDIT(ENTRY.DAY(I),ENTRY.MSEC(I),ENTRY.FLAG(I),CLONG(I)
                      ,CLAT(I),CKAH(I),CKAS(I))(7(F(10,4)));
47   1   2           END;

48   1   1   F4:     CLOSE FILE(FILE3);
49   1   1           IEND=0;
50   1   1           ON TRANSMIT(FILE4) GO TO R4;
51   1   1           ON ENDFILE(FILE4) BEGIN;
52   2   1              IEND=1;
53   2   1              GO TO OUTP;
54   2   1              END;
55   1   1           ON UNDERFLOW BEGIN;
56   2   1              PUT SKIP;  PUT SKIP;
58   2   1              PUT SKIP EDIT('UNDERFLOW CONDITION RAISED')(A);
59   2   1              GO TO TAIL;
60   2   1              END;
61   1   1           ON OVERFLOW BEGIN;
62   2   1              PUT SKIP EDIT(RIP_TIME,GMT_OF_C112(J),RAT(J),PE)(4(E(20,5)));
63   2   1              GO TO R4;
64   2   1              END;
65   1   1           OPEN FILE(FILE4) TITLE('FILE4'||IDENT(III));

                     /*BEGIN SCIENTIFIC DATA PROCESSING*/
                     /*READ START TIME IN HHMM*/
                     /* SIGNAL IS INTERPRETED AS NUMBER OF CONSECUTIVE INTERVALS*/
                     /*DAILY INITIALIZATION OF FLAGS*/
66   1   1           CSRS=0;
67   1   1           RIP_TOL=6;   RIP_TOL2=RIP_TOL+RIP_TOL;
69   1   1           GET LIST (SIGNAL);
70   1   1           IF SIGNAL<0 THEN GO TO TAIL;  /*END RUN ON NEGATIVE FLAG*/
71   1   1           START_TIME=0;

72   1   1   CHIN:   COUPER=0.0;
73   1   1           MEAN=0.0;
74   1   1           NUM=0.0;
75   1   1           TOTAL_TIME=0.0;

76   1   1   R4:     READ FILE(FILE4) INTO(UVDATA);

                     /*CHECK IF THIS FILE CONTAINS USC DATA*/
77   1   1            IF(FMT&'00100'B)='00100'B THEN GO TO R4;

                     /*CHECK POWER STATUS. WAIT 10 MIN AFTER TURNON*/
78   1   1           DO J=1 TO 4;
```

```
MT LEV NT

 79   1  2          IF C_124(J)='0'B THEN DO;
 80   1  3                                START_TIME=START_TIME+600000;
 81   1  3                                GO TO R4;
 82   1  3                                END;
 83   1  2          END;

                    /*CHECK FOR GOOD STAR DATA*/
 84   1  1          IF AREF='00'B THEN GO TO R4;
 85   1  1          IF AREF='01'B & STAR_DELAY='111111111111' THEN GO TO R4;

 86   1  1          BPS=BPS1;
 87   1  1          BIT_RATE=10B**(BPS+100B);
 88   1  1          BIT_PER = 1.0/BIT_RATE;
 89   1  1          FRAME_PER = 192.0*BIT_PER;
 90   1  1          DEL_TIME = 108000.0*BIT_PER;
 91   1  1          DEL_TIME_PRIME = 12000.0*BIT_PER;
                    /*HALVE EFFECTIVE BIT RATE IN TIME-SHARED FORMAT*/
 92   1  1          IF SUBSTR(FMT,1,1)='1'B THEN DO;
 93   1  2          DEL_TIME = DEL_TIME + FRAME_PER*1000;
 94   1  2          FRAME_PER = FRAME_PER + FRAME_PER;
 95   1  2          DEL_TIME_PRIME = 108000.0*BIT_PER;
 96   1  2          END;
                    /*SEARCH FOR DESIRED STARTING TIME*/
 97   1  1          IF GMT+512000*FIXED(FRAME_PER,31,0)<START_TIME THEN GO TO R4;

                    /*IF PARAMETERS NOT ALL GOOD USE EARLIEST GOOD VALUES*/
 98   1  1          FF1=FF3=FF4=0;
 99   1  1          DO J=4 TO 1 BY -1;
100   1  2          IF FLAG3(J)='00'B THEN DO; SP=1000.0*SPIN_PER(J); FF3=1;
103   1  3                                IF(ABS(SP)<0.01) THEN SP=12657.4;
104   1  3                ROLL=SP/128.0;  END;
106   1  2          IF FLAG1(J)='00'B THEN DO; SPSG=SPF(J); FF1=1; END;
110   1  2          IF FLAG4(J)='00'B THEN DO; PE=PHASE_ERROR(J); FF4=1; END;
114   1  2          END;
115   1  1          IF (FF1+FF3+FF4)<3 THEN GO TO R4;

                    /*NOW WE HAVE ENOUGH DATA TO MAKE USE OF A RIP*/
                    /*SEARCH FOR EARLIEST GOOD RIP*/
116   1  1          DO J=1 TO 4;
117   1  2          IF FLAG2(J)='00'B THEN GO TO BEGN;
118   1  2          END;
119   1  1          GO TO R4;

120   1  1  BEGN:   INIT_TIME=GMT;
121   1  1          GMT_START=GMT-DEL_TIME;

                    /*COMPUTE RELATIVE DEAD TIME PER EVENT WITH 10 MICROSEC FIXED
                    DEAD TIME DISCRIMINATOR*/
                    /*CHECK ATC TEST DATA FOR ACTUAL INSTRUMENT DEAD TIME      */
122   1  1          DEAD=1.0E-05/FRAME_PER;

123   1  1          RIP_TIME=GMT_OF_C112(J)-1000.0*RAT(J)+PE;
```

```
MT LEV NT

                    /*CALCULATE TIME OF RIP PRECEDING START OF LOGICAL RECORD*/
124   1   1         LAST_RIP=RIP_TIME-CEIL((RIP_TIME-GMT_START+RIP_TOL)/SP)*SP;
125   1   1         NEXT_RIP=LAST_RIP+SP;
126   1   1         NR1=FIXED(NEXT_RIP+DEL_TIME,31,0)-RIP_TOL;
127   1   1         NR2=NR1+RIP_TOL2;
128   1   1         NI=FRAME_PER*128000/SP/2+0.5;

129   1   1         DO J=31 TO 1 BY -1;
130   1   2         IF DAY(J)=DD THEN DO;
131   1   3         IDAY=J; /*SETS INDEX FOR THE CORRECT DAY*/
132   1   3         GO TO OUT;
133   1   3         END;
134   1   2         IF(DAY(J)¬='00000000000000000000000000000000'B)&(DAY(J)<DD)THEN
                    DO;
135   1   3         IDAY=J;  GO TO OUT;   END;
138   1   2         END;
139   1   1     OUT: IF AREF='01'B THEN DO;
140   1   2                         STAR1=STAR_DELAY;
141   1   2                         STK=STAR1*1000.0/256.0;
142   1   2                         DELT1=CKAS(IDAY)+25.0; END;
144   1   1                     ELSE DELT1=CKAH(IDAY);

                    /*ENTER LOOP TO PROCESS 4 LOGICAL RECORDS*/
145   1   1         DO J=1 TO 4; /*ENDS AT LOO*/
                    /*UPDATE THE SPIN PARAMETERS AS WE GO IF GOOD DATA*/
146   1   2         IF FLAG3(J)='00'B THEN DO; SP=1000.0*SPIN_PER(J);
148   1   3                                IF(ABS(SP)<0.01) THEN SP=12657.4;
149   1   3                 ROLL=SP/128.0;  END;
151   1   2         IF FLAG1(J)='00'B THEN SPSG=SPF(J);
152   1   2         IF FLAG4(J)='00'B THEN PE=PHASE_ERROR(J);
153   1   2         DEL_ANGLE=-95.3;
154   1   2         IF SUBSTR(SPSG,1,1)='1'B THEN DEL_ANGLE=180.0-95.3;

                    /*CONVERT ANGULAR OFFSETS TO MS, FIXED*/
155   1   2         DELT=(DELT1+DEL_ANGLE)*SP/360.0;
156   1   2         IF AREF='01'B THEN DELT=DELT+STK;
157   1   2         FANG=SIGN(DELT)*FIXED(ABS(DELT/ROLL)+.5);  /*OFFSET IN BINS*/
158   1   2         IF FLAG2(J)='00'B THEN DO;
159   1   3         RIP_TIME=GMT_OF_C112(J)-1000.0*RAT(J)+PE;
160   1   3         LAST_RIP=RIP_TIME-CEIL((RIP_TIME-GMT_START+RIP_TOL)/SP)*SP;
161   1   3         NEXT_RIP=LAST_RIP+SP;
162   1   3         NR1=FIXED(NEXT_RIP+DEL_TIME,31,0)-RIP_TOL;
163   1   3         NR2=NR1+RIP_TOL2;
164   1   3         END;

                    /*SYNC EACH RECORD*/
165   1   2         DO K=24 TO 120 BY 32;
166   1   3         IF F(J,K)='1'B THEN GO TO LOO;
167   1   3         GMT_OF_SUBCOM=GMT_OF_SCID(J,K)+112000.0*BIT_PER;
168   1   3         N1=FLOOR((GMT_OF_SUBCOM-LAST_RIP)/SP);
169   1   3         GMT_TEST1=LAST_RIP+N1*SP-GMT_OF_SUBCOM;
```

```
STMT LEV NT

 226   1  1          DOY=DD;
 227   1  1           DO I=1 TO 2 BY 1;
 228   1  2           DO J=1 TO 128 BY 1;
 229   1  3           IF NUM(I,J)=0.0 THEN MEAN(I,J)=0.0;
 230   1  3           ELSE MEAN(I,J)=COUPER(I,J)/NUM(I,J);
 231   1  3           END;  END;
 233   1  1          PUT SKIP EDIT('DAY = ',DD)(A,F(6,0));
 234   1  1          PUT SKIP EDIT('INITIAL TIME= ',INIT_TIME/1000.)(A,F(15,3));
 235   1  1          P=INIT_TIME/3.6E+06;
 236   1  1          IH=FLOOR(P);
 237   1  1          Q=60.0*(P-IH);
 238   1  1          IM=FLOOR(Q);
 239   1  1          R=60.0*(Q-IM);
 240   1  1          IS=FLOOR(R);
 241   1  1          PUT EDIT(IH,IM,IS)(F(6),F(6),F(6));
 242   1  1          PUT SKIP EDIT('END TIME = ',END_TIME/1000.)(A,F(18,3));
 243   1  1          P=END_TIME/3.6E+06;
 244   1  1          IH=FLOOR(P);
 245   1  1          Q=60.0*(P-IH);
 246   1  1          IM=FLOOR(Q);
 247   1  1          R=60.0*(Q-IM);
 248   1  1          IS=FLOOR(R);
 249   1  1          PUT EDIT(IH,IM,IS)(F(6),F(6),F(6));
 250   1  1          PUT SKIP EDIT('TOTAL TIME = ',TOTAL_TIME)(A,F(15,3));
 251   1  1          PUT SKIP EDIT('BIT RATE = ',BIT_RATE)(A,F(6,0));

 252   1  1          OUTPUT=LOGISTICS,BY NAME;
 253   1  1          WRITE FILE(FILE) FROM(OUTPUT);

 254   1  1          START_TIME=GMT_START;
 255   1  1          IF IEND=1 THEN GO TO TAIL;
 256   1  1          SIGNAL=SIGNAL-1;
 257   1  1          IF SIGNAL<1 THEN GO TO TAIL;
 258   1  1          GO TO CHIN;
 259   1  1   TAIL:  CLOSE FILE(FILE4);
 260   1  1          CLOSE FILE(FILE);
 261   1  1          END; /*III LOOP*/
 262   1  0          END PROG;
```

```
STMT LEV NT

 170   1  3          GMT_TEST2=GMT_TEST1+SP;
 171   1  3          IF ABS(GMT_TEST1)>RIP_TOL & ABS(GMT_TEST2)>RIP_TOL THEN DO;
 172   1  4          IF ABS( GMT_TEST1+24000.0*BIT_PER)>RIP_TOL
                     & ABS( GMT_TEST2+24000.0*BIT_PER)>RIP_TOL THEN DO;
 173   1  5              CSRS=(ENG(J,K)&'000011'B)-N1;
 174   1  5     TES1:    IF CSRS<0 THEN DO;
 175   1  6                 CSRS=CSRS+4;
 176   1  6                 GO TO TES1;
 177   1  6                 END;
 178   1  5              GO TO CRNK; END;
 180   1  4                                          END;
 181   1  3          END;

 182   1  2  CRNK:   DO K=1 TO 128;        /* ENDS AT LAST */
 183   1  3          IF F(J,K)='0'B & DO(J,K)='11'B THEN GO TO FAIR;
 184   1  3                                          ELSE GO TO LOO;
 185   1  3  FAIR:   GMT_SCID=GMT_OF_SCID(J,K);
 186   1  3          IF GMT_SCID>NR1 THEN DO;
 187   1  4          NR2S=NR2;
 188   1  4              LAST_RIP=NEXT_RIP;
 189   1  4              NEXT_RIP=LAST_RIP+SP;
 190   1  4              NR1=FIXED(NEXT_RIP+DEL_TIME,31,0)-RIP_TOL;
 191   1  4              NR2=NR1+RIP_TOL2;
 192   1  4              CSRS=CSRS+1;
 193   1  4              IF GMT_SCID<NR2S THEN GO TO LAST;
 194   1  4              END;
 195   1  3          WORD=WORD55(J,K)||WORD56(J,K);
 196   1  3          C=(WORD&'0000001111110000'B)/10000B;
 197   1  3          X=WORD&'0000000000001111'B;
 198   1  3          IF X=0 THEN COUNTS=C;
 199   1  3                 ELSE COUNTS=(2**(15-X))*(32+C);
 200   1  3          L=((CSRS&'0000000000000010'B)/10B)+1;
 201   1  3          COUNTS=COUNTS/(1.0-COUNTS*DEAD);

 202   1  3          M=FIXED(((GMT_SCID-DEL_TIME_PRIME-LAST_RIP)/ROLL)+1.5) + FANG;
 203   1  3  TEST1:  IF M>128 THEN DO; M=M-128; GO TO TEST1; END;
 207   1  3  TEST2:  IF M<1 THEN DO; M=M+128; GO TO TEST2; END;
 211   1  3          WEIGHT=1./(2.*NI+1.);
 212   1  3          WEIGHT_COUNT=WEIGHT*COUNTS;
 213   1  3          WEIGHT_NUM=WEIGHT*FRAME_PER;
 214   1  3               DO JSP=-NI TO NI BY 1;
 215   1  4               MSP=M+JSP;
 216   1  4               MSP=MOD(MSP,128);
 217   1  4               IF MSP=0 THEN MSP=128;
 218   1  4               COUPER(L,MSP)=COUPER(L,MSP)+WEIGHT_COUNT;
 219   1  4               NUM(L,MSP)=NUM(L,MSP)+WEIGHT_NUM;
 220   1  4               END;
 221   1  3          TOTAL_TIME = TOTAL_TIME + FRAME_PER;
 222   1  3  LAST:   END; /*END FOR 128 LOOP*/
 223   1  2  LOO:    GMT_START=GMT_START+128000.0*FRAME_PER;
 224   1  2          END;

 225   1  1  OUTP:   END_TIME=GMT_START;
```

C. DEFINITION OF COMPUTER PROGRAM VARIABLES

The following is a list of variables used in the program given in the last section.

File 1 - Logistics File - Variable Definitions

HEADER 1	Characters 1-14
ACQUISITIONS	Characters 15-30
HEADER 2	Characters 31-48
GENERATION	Characters 49-96
DSIF	Characters 97-120
BIT-RATES	Characters 121-240
FORMATS	Characters 241-360
MODES	Characters 361-380
TIMES	Characters 381-412
SEQUENCE	Characters 413-433
FILL 1	Characters 434-480 (not used)

File 2 - Command File - Variable Definitions

COMMANDS - Structured array of 1200 characters with 10 LOGICAL RECORDS of 120 characters each mode up of:

N	Characters 1-8 - number of commands
COMD	Characters 9-118 - command nneumonics
FILL 2	Characters 119-120 (not used)

File 3 - Spacecraft Attitude Data - Variable Definitions

TRAJ	Structured array of 1200 characters named
ENTRY	array containing the following variables:
DAY	Word 1 (DOY)
MSEC	Word 2 (GMT)
FILL 3	Word 3 (SPARE)
FILL 4	Bits 1-30 of Word 4 } (FLAG)
FLAG	Bits 31-32 of Word 4 } (FLAG)
CLONG	Word 5 (CLON)
CLAT	Word 6 (CLAT)
CKAH	Word 7 (CKAH)
CKAS	Word 8 (CKAS)
FILL 5	Word 9-10 (SPARE)

File 4 - Experimental Data Record - Variable Definitions

UV DATA	Structured array of 4300 bytes	
TRACK	Structure array	
GMT	Word 1 (GMT)	
DD	Word 2 (DOY)	
TCF	Word 3 (TCF)	
FILL 6	Bits 1-30 of Word 4	(AREFSELS)
AREF	Bits 31-32 of Word 4	
SNR	Word 5 (SNR)	
FILL 7	Bits 1-24 of Word 6	(DSS)
DSS	Bits 25-32 of Word 6	
FILL 8	Bits 1-28 of Word 7	(BIT RATE)
BPSI	Bits 29-32 of Word 7	
FILL 9	Bits 1-24 of Word 8	(MOD-FMT)
MODE	Bits 25-27 of Word 8	
FMT	Bits 28-32 of Word 8	
RTLT	Word 9 (RTLT)	
ESC	Word 10 (ESC Subcom ID)	
FILL 10	Bits 1-20 of Word 11	(ASTDLYC)
STAR-DELAY	Bits 21-32 of Word 11	

File 4 - Experiment Data Record

SUBCOM	Structural array - repeated 4 times	
SCRAFT	First structured element made up of	
FILL 11	Bits 1-6 of Word 12	(ARIPPHEC)
FLAG 4	Bits 7-8 of Word 12	
FILL 12	Bits 9-14 of Word 12	(SPF)
FLAG 3	Bits 15-16 of Word 12	
FILL 13	Bits 17-22 of Word 12	(ASPNPDC)
FLAG 2	Bits 23-24 of Word 12	
FILL 14	Bits 25-30 of Word 12	(RAT)
FLAG 1	Bits 21-32 of Word 12	
RAT	Word 13 (Roll Attitude Timer)	
SPIN-PER	Word 14 (ASPNPDC - Spin Period)	
FILL 15	Bits 1-29 of Word 15	(SPF)
SPF	Bits 30-32 of Word 15	
PHASE-ERROR	Word 16	(ARIPPHEC)
GMT-OF-C112	Word 17 (Time of Roll Attitude Timer)	
BUS-VOLTAGE	Word 18 (DC Bus Voltage)	
BUS-CURRENT	Word 19 (DC Bus Current)	
FILL 16	Bits 1-4 of Word 20	(Power Status - GMT of Power Status
C-124	Bits 5 of Word 20	
GMT-OF-C124	Bits 6-32 of Word 20	
PT	Word 21 (S/C Platform Temperature)	

File 4 - Experiment Data Record

SCIENCE	Second structured element repeated 128 times	
F	Bit 1 of Word 22 (Fill indicator)	
DQ	Bits 2-3 of Word 22 (Data Quality Indicator)	
GMT-OF-SCID	Bits 4-32 of Word 22 (GMT of SCID)	
FILL 17	Bit 1-2 of Word 23	
ENG	Bits 3-8 of Word 23 (CSRS Status)	
FILL 18	Bits 9-13 of Word 23	(DATA)
WORD 55	Bits 14-16 of Word 23	
FILL 19	Bits 17-18 of Word 23	(DATA)
WORD 56	Bits 19-24 of Word 23	
FILL 20	Bit 25 of Word 23	(SCID NUMBER)
SCID	Bits 26-32 or Word 23	

Output Variables

OUTPUT	Structured array of 1330 bytes.
HEADER 1	Characters 1014 from File 1
HEADER 2	Characters 31-48 from File 1.
FORMATS	Characters 241-360 from File 1
TIMES	Characters 381-412 from File 1
FILL 21	8 blank characters
SNRA	1 blank word
START-TIME	Start time of data accumulation cycle in msec.
END-TIME	End time of data accumulation cycle in msec.
TOTAL-TIME	Total time of data accumulation cycle in sec.
FILL 22	88 blank characters.
AVERAGES MEANS MEAN	Array of (2,128) where the accumulated counts for both channels given for 128 bins is stored.
FILL 23	2 blank characters
DOY	DD - Word 2 of File 4.

Other Program Variables

BIT-PER	Time required to transmit one bit of data from the spacecraft time given in seconds.
BIT-RATE	Rate of data transmission from spacecraft. Given in bits/second. See File 4 - Table 2.
BPS	Equals BPS1. See File 4 - Experment Data Record Variable Definitions.
C	Mantessa value of data counts. See Part I - Section on Data Decompression.
COUNTS	Value for the data counts. See Part I - Section on Data Decompression.
COUPER	Accumulator where counts are stored for 128 bins and 2 channels.
CSRS	Channel status - Roll status. See Part I - Section on Channel determination.
DEAD	Dead time of the discriminator for collection interval
DEL-ANGLE	Angle offset between RIP and USC/UV instrument. Given in degrees.
DEL-TIME	Time between a GMT-OF-SCID and the next PWG. Given in seconds. See introduction to computer program.
DEL-TIME-PRIME	Time between a GMT-OF-SCID and the middle of the data accumulation period. See introduction to computer program.
DELT	Total angular offset from 0° to the middle of the data accumulation period. Given in milliseconds. See introduction to computer program.

Program Variables

DELT1	Angular offset due to star sensor. Given in degrees. See introduction to computer program.
END-TIME	Ending time of the data accumulation period for variable MEANS. Given in milliseconds.
FANG	Equals DELT. Value given in bins instead of degrees. See introduction to computer program.
FF1	Equals '1' if FLAG1 is okay '0' if FLAG1 is bad
FF3	Equaks '1' if FLAG3 is okay '0' if FLAG 3 is bad
FF4	Equals '1' if FLAG4 is okay '0' if FLAG 4 is bad

See File 4 - Experiment Data Record - Variable Definitions.

FRAME-PER	Time to transmit one frame of data from the spacecraft. Given in seconds. See introduction to computer program.
GMT-OF-SUBCOM	Time of the subcommunicator. Given in milliseconds. See introduction to computer program.
GMT-SCID	Equals GMT-OF-SCID. See File 4 - Experiment Data Record - Variable Definitions
GMT-START	Starting time of the data accumulation period for variable MEANS. Given in milliseconds.
GMT-TEST1	Time used to test sync of CSRS value with ENG value. See introduction to computer program.
GMT-TEST2	Time used to test sync of CSRS value with ENG value. See introduction to computer program.

Program Variables

I	Index variable
IDAY	Index for day used in File 3 - Attitude Data Records
IDENT	Index for number of files read into the program.
IEND	Flag to indicate end of File 4 data processing.
IH	Hours (Used in output of INIT-TIME and END-TIME).
III	Index for number of day's to process in the program.
IM	Minutes (Used in output of INIT-TIME and END-TIME).
INIT-TIME	Equals GMT-START. Saved for output purposes. Given in milliseconds.
IS	Seconds (Used in output of INIT-TIME and END-TIMEO
J	Index variable
JSP	Index variable
K	Index variable
L	Channel status indicator '1' - "Hydrogen" (Long wavelength) '2' - "Helium" (short wavelength)
M	Bin number for center of data collection interval. See introduction to computer program.
MSP	Bin numbers of data collection interval. See introduction to computer program.

Program Variables

NEXT-RIP	Time of next RIP pulse given in milliseconds. See introduction to computer program.
NI	Total number of bins for which data has been stored over the collection interval. See MSP.
NO-OF-DAYS	Total number of days to process with the program.
NRI	Time of left end of RIP pulse given in milliseconds. See introduction to computer program.
NR2	Time of right end of RIP pulse given in milliseconds. See introduction to computer program.
NR2S	Equals NR2 (saved variable)
NUM	Accumulation where total times are stored for 128 bins and 2 channels. See COUPER
N1	Number of spin periods between the last RIP pulse and a GMT-OF-SCID.
P	Equals INIT-TIME. Given in seconds.
PE	Equals PASE-ERROR. See File 4 - Experiment Data Record - Variable Descriptions.
Q	An INIT-TIME output variable
R	An INIT-TIME output variable
RIP-TIME	Time of a RIP pulse given in milliseconds. See introduction to computer program.
RIP-TOL	Tolerance of a RIP pulse. Half-width. See introduction to computer program.
RIP-TOL2	Tolerance of a RIP pulse. Full-width. See introduction to computer program.

Program Variables

ROLL	Time required for spacecraft to move 1 bin's distance. Given in milliseconds.
SIGNAL	Total number of data accumulation periods to process for MEAN
SP	Equals SPIN-PER given in milliseconds
SPSG	Equals SPF - See File 4 - Experiment Data Record - Variable Descriptions
STAR1	Equals STAR-DELAY See File 4 - Experiment Data Record - Variable Description
STK	Converts STAR1 to ms
WEIGHT	Weighing factor for how much of the data goes into each bin.
WEIGHT-COUNT	Weighted count factor of how many counts goes into one bin.
WEIGHT-NUM	Weighted time factor of how much time is spent in one bin.
WORD	Combination of C & X. See Part I - Section on Data Decompression.
X	Exponent part of data counts. See Part I - Section on Data Decompression.

Subroutines and Functions Used

ABS	Returns absolute value of an argument
CEIL	Returns smallest integer that is = or > the argument
FIXED	Converts floating-point number to fixed-point
FLOOR	Returns smallest integer that is = or < the argument
MOD	Performs mod arithmetic on two arguments
SIGN	Returns the sign of an argument
SUBSTR	Extracts characters from a string of characters.

See "PL/I (F) Language Reference Manual"
IBM System Reference Library
Order #GG28-8201-4

LABEL CONSTANTS

BEGN,

CHIN,

CRNK,

FAIR,

F2,

F3,

F4,

LAST,

LOO,

OUT,

OUTP

PROG,

R4,

TAIL,

TEST1,

TEST2,

TES1.

LIST OF FIGURES

1. Spectral sensitivity of the two channel ultraviolet photometer of the University of Southern California on board both Pioneer 10 and 11.
2. Viewing geometry of the photometer.
3. Schematic Diagram of the UV Instrument.
4. Algorithm to Decompress Telemetry Data
5. Format A Word Assignments
6. Time Reference Definition
7. Formats E-1 and E-2 Spacecraft Words
8. Rip Time Determination

LIST OF TABLES

1. USC XUV Photometer Instrument Parameters

2. Data Sampling Rate for Science Subcomm Words

3. DSS Codes (Source Codes)

4. Rate of Data Transmission from Spacecraft (Binary)

5. Format ID Assignments

6. Quality Indicator (Binary)

HEX DUMP OF D-080583.FG036

01/03/86 - 08/06/86

FILE 11 RECORD 1 4300 BYTES

day 2, 1986

(0)	03178C7E	00000021	00000000	00000002	41208000	0000000C	00000001	00000008	013C52F0	00000000
(40)	00000126	00000000	41590000	4175836B	00000006	00000000	03189B7D	421BEC60	411E581D	0B19B53A
(80)	41B2FFE0	63178C7E	00000000	6317A3EE	00000001	6317BB5E	00031E02	6317D2CE	00012E03	6317EA3E
(120)	00001004	631801AE	00000005	6318191E	00000006	6318308E	00041E07	BFFFFFFF	FFFFFFFF	63185F6E
(160)	00001009	631876DE	0000200A	63188E4E	0000200B	6318A5BE	00051E0C	6318BD2E	00033E0D	6318D49E
(200)	0000100E	6318EC0E	0000000F	6319037E	00000010	63191AEE	00041E11	6319325E	00030E12	631949CE
(240)	00000013	6319613E	00000014	631978AE	00012E15	6319901E	00032E16	6319A78E	20032E17	6319BEFE
(280)	00000018	6319D66E	00002019	6319EDDE	00043E1A	631A054E	00040E1B	631A1CBE	00030E1C	631A342E
(320)	0000001D	631A4B9E	0000001E	631A630E	00051E1F	631A7A7E	00042E20	631A91EE	00042E21	631AA95E
(360)	00001022	631AC0CE	00000023	631AD83E	00050E24	631AEFAE	00031E25	631B071E	00020E26	631B1E8E
(400)	00001027	631B35FE	00001028	631B4D6E	00022E29	631B64DE	00030E2A	631B7C4E	00050E2B	631B93BE
(440)	0000102C	631BAB2E	0000102D	631BC29E	00033E2E	631BDA0E	00040E2F	631BF17E	00002030	631C08EE
(480)	00000031	631C205E	00000032	631C37CE	00043E33	631C4F3E	00030E34	631C66AE	00001035	631C7E1E
(520)	00001036	631C958E	02000037	631CACFE	00020E38	631CC46E	00041E39	631CDBDE	0000103A	631CF34E
(560)	0000103B	631D0ABE	0000203C	631D222E	00032E3D	631D399E	00040E3E	631D510E	0000003F	631D687E
(600)	00002040	631D7FEE	00000041	631D975E	00033E42	631DAECE	00020E43	631DC63E	00000044	631DDDAE
(640)	00002045	631DF51E	00033E46	631E0C8E	00040E47	631E23FE	35021E48	631E3B6E	00000049	631E52DE
(680)	0000004A	631E6A4E	00030E4B	631E81BE	00043E4C	631E992E	00023E4D	631EB09E	0000104E	631EC80E
(720)	0000104F	631EDF7E	00023E50	631EF6EE	00041E51	631F0E5E	00033E52	631F25CE	00001053	631F3D3E
(760)	00000054	631F54AE	00023E55	631F6C1E	00033E56	631F838E	20052E57	631F9AFE	00000058	631FB26E
(800)	00000059	631FC9DE	00040E5A	631FE14E	00033E5B	631FF8BE	0000005C	6320102E	0000105D	6320279E
(840)	0000105E	63203F0E	00052E5F	6320567E	00023E60	63206DEE	00001061	6320855E	00001062	63209CCE
(880)	00000063	6320B43E	00031E64	6320CBAE	00053E65	6320E31E	00000066	6320FA8E	00001067	632111FE
(920)	00000068	6321296E	00041E69	632140DE	00032E6A	6321584E	0000306B	63216FBE	0000206C	6321872E
(960)	0000106D	63219E9E	00033E6E	6321B60E	00032E6F	6321CD7E	00000070	6321E4EE	00001071	6321FC5E
(1000)	00000072	632213CE	00041E73	63222B3E	00053E74	632242AE	00001075	63225A1E	00002076	6322718E
(1040)	03043E77	632288FE	00021E78	6322A06E	00051E79	6322B7DE	0000207A	6322CF4E	0000007B	6322E6BE
(1080)	00033E7C	6322FE2E	00042E7D	6323159E	00051E7E	63232D0E	0000107F	00000000	41590000	4175836B
(1120)	00000006	00000000	03189B7D	421BEC60	45F42400	FFFFFFFF	41B2FFE0	6323447E	00001000	63235BEE
(1160)	00052E01	6323735E	00040E02	63238ACE	00033E03	6323A23E	00001004	6323B9AE	00001005	6323D11E
(1200)	00031E06	6323E88E	00032E07	6323FFFE	35043E08	6324176E	00001009	63242EDE	0000000A	6324464E
(1240)	00032E0B	63245DBE	00031E0C	6324752E	0000000D	63248C9E	0000200E	6324A40E	0000100F	FFFFFFFF
(1280)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1320)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1360)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1400)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1440)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1480)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1520)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1560)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1600)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1640)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1680)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1720)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1760)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1800)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1840)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1880)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1920)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(1960)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(2000)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(2040)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(2080)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(2120)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
(2160)	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF

APF001
D-54477
03/11/72 - 05/01/72

RECORD 1 OF FILE II
LENGTH = 4300 BYTES

71

000001C4	00000042	00000000	00000002	417D0000	0000002A	00000005	00000018	0000A3AC	FFFFFFFF
00000000	00000200	45F42400	41C5F35D	00000006	C15DC000	FFFFFFFF	45F42400	45F42400	FFFFFFFF
424978AC	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	BFFFFFFF	FFFFFFFF	600001C4
0006084F	600004B2	00061850	60000A0	00071851	60000A8E	00001752	60000D7C	00002753	60001C6A
00010754	60001358	00023755	60001646	00043756	60001934	3C061757	60001C22	00063758	60001F10
00062759	600021FE	000607SA	60024EC	0005075B	600027DB	0003375C	60002AC9	00022750	60002DB7
0000275E	600030A5	00071E5F	60003393	00061860	60003681	00063861	6000396F	00073862	60003C5D
00003763	60003F4B	00002764	60004239	00020765	60004527	00040766	60004815	00053767	60004B03
00063768	60004DF1	00062769	60050DF	00061760A	600053CD	0005376B	600056BB	0004276C	600059A9
00012D6D	60005C97	00010D6E	60005F85	00061E6F	60006273	00032E70	60006561	00013E71	60006E4F
00051E72	60006B3D	00062E73	60006E2B	00001D74	60007119	00002D75	60007407	00013D76	60007FF5
02030D77	600079E3	00032D7E	60007CD1	00042D79	60007FBF	00041D7A	600082AD	00040D7B	60008S9C
00023D7C	6000E88A	00020D7D	60008B78	00003D7E	60008E66	00053E7F	00000000	41B3C000	41C5F35D
00000006	C15DC000	0000B260	421BE400	4136D3A1	0800D590	424978AC	60009154	00040E00	60009442
00042E01	60009730	00040E02	60059A1E	00063E03	60009D0C	00063E04	60009FFA	00061E05	6000A2E8
00011D06	6000A5D6	00032D07	6000A8C4	16020D08	6000ABB2	00042D09	6000AEA0	00041D0A	6000B18E
00040D0B	6000E47C	00020D0C	60B76A	00013D0D	6000BA58	0003070E	6000BD46	0001070F	6000C034
00073810	6000C322	00061811	6000C610	00060812	6000C8FE	00070813	6000CBEC	00001714	6000CECA
00002715	6000D1C8	00011716	6000D4B6	3C031717	6000D7A4	00050718	6000DA92	00062719	6000DD80
0006271A	6000E06E	00061718	6000E35D	0005371C	6000E64B	0005071D	6000E939	0003271E	6000EC27
0002071F	6000EF15	00002720	6000F203	00070821	6000F4F1	00060822	6000F7DF	00062823	6000FACD
00073824	6000FDBB	00002725	60010A9	00003726	60010397	00013727	60010685	00040728	60010973
00052729	60010C61	0006272A	60010F4F	00061728	60011230	0006172C	60011528	0005272D	60011815
0004172E	60011B07	00011D2F	60011DF5	00000D30	600120E3	00033E31	600123D1	00051E32	600126BF
00033E33	600129AD	00052E34	60012C9B	00060E35	60012F89	00072E36	60013277	02002D37	60013565
00003D38	60013853	00042D39	60013B41	00042D3A	60013E2F	00042D3B	60014116	00041D3C	60014400
00040D3D	600146FA	00041D3E	60145E8	00020D3F	60014CD6	00010D40	60014FC4	00062E41	600152B2
00061E42	600155A0	00051E43	60158E	00062E44	60015B7C	00062E45	60015E6A	00060E46	60016158
00000D47	60016446	16000D48	60016734	00031D49	60016A22	00041D4A	60016D10	00041D4B	60016FFE
00033D4C	600172EC	00023D4D	60175DA	00031D4E	600178C8	00030D4F	60017BB6	00030750	60017EA4
00010751	60018192	00073E52	60184B0	00061853	6001876E	00053854	60018A5C	00070855	60018C4A
00001756	60019038	3C002757	60195326	00010758	60019614	00030759	60019902	0005075A	60019BF0
00060758	60019EDF	0006375C	6001A1CD	0006175D	6001A4BB	0005375E	6001A7A9	0005075F	6001AA97
00033760	6001AD85	00021761	6001B073	00002762	6001B361	00063863	6001B64F	00053864	6001B93D
00061E65	6001EC2B	00073866	6018F19	00002767	6001C207	00003768	6001C4F5	00013769	6001C7E3
0004076A	6001CAD1	0005376B	6001CDBF	0006276C	6001D0AD	0006176D	6001D39B	0006176E	6001D689
0005276F	6001D977	00042770	6001DC65	00003D71	6001DF53	00062E72	6001E241	00061E73	6001E52F
00062E74	6001E81D	00031E75	6001E80B	00062E76	6001EDF9	02061E77	6001F0E7	00062E78	6001F3D5
00000D79	6001F6C3	00020D7A	6001F9B1	00031D7B	6001FCA0	00040D7C	6001FF8E	00043D7D	60020276
00042D7E	6002056A	00041D7F	00000000	41842000	41C5F35D	00000006	C15DC000	00022964	421BE400
4136D3A1	08024C94	424978AC	60020E58	00032D00	60020B46	00010D01	60020E34	00023D02	60021122
00071E03	60021410	00063E04	60021EFE	00051E05	600219EC	00032E06	60021CDA	00042E07	60021FC8
16062E08	600222B6	00061E09	60225A4	00011D0A	60022892	00031D0B	60022B80	00032D0C	60022E6E
00051D0D	60023I5C	00050D0E	60023444A	00042D0F	60023738	00013D10	60023A26	00022D11	60023D14
00030712	60024002	00011713	60242F0	00073814	600245DE	00070815	600248CC	00060816	60024BBA
3C071817	60024EA8	00001718	60251S6	00003719	60025485	0001171A	60025773	00030718	60025A61
0005071C	60025D4F	0006171D	60026D3D	0006371E	6002632B	0006271F	60026619	00053720	60026S07
00050721	60026BF5	00033722	60026EE3	00021723	600271D1	00002724	600274BF	00071825	600277AD
00060826	60027A9B	00063827	60027D89	00000728	60028077	00002729	60028365	0000272A	60028653
0002072E	60028941	0004072C	60028C2F	0006072D	60028F1D	0006272E	60029208	0006272F	60029 4F9
00061730	60029E7	00052731	60029AD5	00042732	60029DC3	00002D33	6002A0B1	00010D34	6002A39F
00041E35	6002A68D	00070E36	6002A97B	02063E37	6002AC69	00061E38	6002AF57	00071E39	6002B246
00002D3A	6002E534	00002D3B	6002B822	00020D3C	6002BB10	00033D3D	6002BDFE	00040D3E	6002C0EC
00050D3F	6002C3DA	00040D40	6002C6C8	00030D41	6002C9B6	00030D42	6002CCA4	00021D43	6002CF92
00002D44	6002D280	00071E45	6002D56E	00023E46	6002D85C	00033E47	6002DB4A	16052E48	6002DE38
00053E49	6002E126	00042E4A	6002E414	00051E4B	6002E702	00001D4C	6002E9F0	00031D4D	6002ECDE
00033D4E	6002EFCC	00040D4F	6002F2BA	00032D50	6002F5A8	00040D51	6002F896	00041D52	6002FB84

00023D53	6002FE72	00030754	60030160	00010755	6003044E	00000756	6003073C	3C061857	60030A2A
00060858	60030D18	00070859	60031007	00C0175A	600312F5	0000375B	600315E3	00011750	60031ED1
0003175D	60031BBF	000507SE	60031EAD	0006375F	60032198	00062760	60032489	00061761	60032777
00060762	60032A65	00051763	60032D53	00033764	60033041	00020765	6003332F	00001766	60033610
00071867	60033908	00061868	60033BF9	00063869	60033EE7	0000076A	60034105	0000376B	60034403
0000276C	600347B1	0002176D	60034A9F	0004176E	60034D8D	0005376F	60035078	00063770	60035369
00062771	60035657	00061772	60035945	00052773	60035C33	00042774	60035F21	00011D75	6003620F
00000D76	60036FFC	02053E77	60036EB	00040E78	60036AD9	00050E79	60036DC8	00042E7A	60037086
00000D7E	60037304	00062E7C	60037692	00000D7D	60037980	00012D7E	60037C6E	00023D7F	00000000
41548000	41C5F35D	00000006	C15DC000	0003A068	421BE400	4136D3A1	0803C398	424978AC	60037F5C
00043D00	6003E24A	00033D01	60038538	00043D02	60038826	00023D03	60038B14	00033D04	60038E02
00022D05	600390F0	00060EC6	60039DE	00063E07	600396CC	16061E08	600399BA	00023E09	60039CA8
00052E0A	6003SF96	00043E0B	60039A284	00009D0C	6003A572	00070E0D	6003A860	00072E0E	6003AB4E
00021D0F	6003AE3C	00033D10	6003B12A	00042D11	6003B418	00041D12	6003B706	00022D13	6003B9F4
00032D14	6003ECE2	00021D15	6003BFD0	00023716	6003C2BE	3C010717	6003C5AC	00073818	6003C89A
00062819	6003C889	0006281A	6003CE77	00072818	6003D165	0000271C	6003D453	0000271D	6003D741
0001171E	6003DA2F	0003271F	6003DD1D	00051720	6003E00B	00063721	6003E2F9	00063722	6003E5E7
00061723	6003E8D5	00053724	6003EBC3	00050725	6003EEB1	00033726	6003F19F	00020727	6003F48D
00001728	6003F77B	00070829	6003FA69	00006182A	6003FD57	00063828	60040045	0000072C	60040333
00002720	60040621	0000372E	60040SOF	0002072F	60040BFD	00042730	60040EEB	00060731	60041D9
00070732	60041407	00062733	60041785	00061734	60041AA3	00051735	60041D91	00041736	60042076
02013D37	60042360	00001D38	60042658	00061E39	6004294A	00042E3A	60042C38	00040E3B	60042F26
00040E3C	60043214	00061E3D	60043502	00073E3E	60043F0	00012D3F	60043ADE	00003D40	60043DCC
00033D41	60044BA	00031D42	60044A8	00053D43	60044696	00043D44	60044984	00031D45	60044C72
00033D46	60044F60	00022D47	60045240	16000D48	6004553C	00070E49	6004582A	00061E4A	60045B18
00032E4B	60045E06	00053E4C	60046F4	00063E4D	60046E2	00072E4E	60046D0	00053E4F	60046SBE
00003D50	60046CAC	00023D51	60046F9A	00031D52	60047288	00060D53	60047576	00040D54	60047E64
00032D55	60047E52	00032D56	60047E40	3C023D57	6004812F	00023758	6004841D	00010759	6004870B
00073B5A	60048F9	00061B5B	60048CE7	00062B5C	60048FD5	00070B5D	60049C3	00002T5E	60049581
0000275F	60049B9F	00011760	60049B8D	00030761	60049E7B	00050762	6004A169	00063763	6004A457
00063764	6004A745	00062765	6004AA33	00053766	6004AD21	00050767	6004B00F	00033768	6004B2FD
00020769	6004E5EE	00001768A	6004B8D9	00070B6B	6004BBC7	0006286C	6004BEB5	00063B6D	6004C1A3
0000076E	6004C491	000C276F	6004C77F	00003770	6004CA6D	00021771	6004CD5B	00040772	6004D049
00060773	6004D337	00063774	6004D625	00063775	6004D913	00063776	6004DC01	01053777	6004DEF0
00042778	6004E1DE	00010D79	6004E4CC	00001D7A	6004E7BA	00062E7B	6004EAA8	00043E7C	6004ED96
00030E7D	6004F084	00042E7E	6004F372	00013D7F					

RECORD 388 OF FILE 11
LENGTH = 4300 BYTES

0524D1F3	00000047	00000000	00000002	41438000	0000002A	00000006	00000018	00008792	00001500
00000000	00000000	4190E000	41C5F1DD	00000006	C2196400	0524E278	421BE400	4136D3A1	0D24F411
424978AC	6524D1F3	00070F00	6524D369	00022F01	6524D4E1	00020F02	6524D657	00021F03	6524D7CF
00020F04	6524D945	00032F05	6524DABD	00072F06	6524DC33	00071F07	6524DDAB	16050F08	6524DF21
00061F09	6524E099	00002E0A	6524E20F	00020E0B	6524E387	00002E0C	6524E4FD	00002E0D	6524E675
00002E0E	6524E7EC	00062F0F	6524E964	00012E10	6524EADA	00000E11	6524EC52	00070F12	6524EDC8
00051F13	6524EF40	00062F14	6524F0B6	00008115	6524F22E	00071916	6524F3A4	3C071917	6524F51C
00062918	6524F692	00062919	6524F80A	0007191A	6524F980	00063918	6524FAF8	00063919	6524FCEE
0007091D	6524FDE6	00070919	6524FF5C	00061919	6525 00D4	00063920	6525024A	00053921	6525 03C2
00053922	6525 0538	00053923	6525 06B0	00051924	6525 0826	00051925	6525099E	00053926	6525 0B14
00070927	6525 0C8C	00073928	6525 0E02	00003829	6525 0F7A	00012828	6525 10F0	00020828	6525 1268
0002182C	6525 13DE	00021820	6525 1556	00020828	6525 16CC	00020829	6525 1844	00020830	6525 19BA
00020831	6525 1B32	00012832	6525 1CA8	00011833	6525 1E20	00002834	6525 1F96	00001835	6525 210E
00000836	6525 2284	01001837	6525 23FC	00073938	6525 2572	00062939	6525 26EA	00061938A	6525 2660
00063938	6525 29D8	00061920	6525 2B4E	00062930	6525 2CC6	00061938E	6525 2E3C	00062938F	6525 2FB4
00062940	6525 312A	00061941	6525 32A2	00061942	6525 3418	00052943	6525 3590	00052944	6525 3706
00051945	6525 387E	00050946	6525 3F4	00053947	6525 3B6C	16070948	6525 3CE2	00000849	6525 3E5A
0000384A	6525 3FD0	00012848	6525 4148	0002184C	6525 42BE	0002284D	6525 4436	0002384E	6525 45AD
0002084F	6525 4725	00021850	6525 489B	00013851	6525 4A13	00020852	6525 4889	00012853	6525 4D01
00010854	6525 4E77	00003855	6525 4FEF	00002856	6525 5165	3E042F57	6525 52DD	00050F58	6525 5453
00002E59	6525 55CB	00033F5A	6525 5741	00060F5B	6525 58B9	00041F5C	6525 5A2F	00023F5D	6525 5EA7
00042F5E	6525 6D1D	00040F5F	6525 6E55	00061F60	6525 600B	00051F61	6525 6183	00053F62	6525 62F9
00052F63	6525 6471	00043F64	6525 65E7	00010F65	6525 675F	00022F66	6525 68D5	00010F67	6525 6A4D
00043F68	6525 6BC3	00022F69	6525 6D3B	00033F6A	6525 6EB1	00050F6B	6525 7029	00061F6C	6525 719F
00070F6D	6525 7317	00050F6E	6525 748D	00021E6F	6525 7605	00003E70	6525 777B	00013E71	6525 78F3
00010E72	6525 7A69	00070F73	6525 7BE1	00000E74	6525 7D57	00073F75	6525 7ECF	00073F76	6525 8045
03031F77	6525 81BD	00070F78	6525 8333	00072F79	6525 84AB	00001E7A	6525 8621	00030F7B	6525 8799
00041F7C	6525 890F	00061F7D	6525 8A87	00060F7E	6525 8BFD	00042F7F	00000000	41792000	41C5F1DD
00000006	C2196400	05259DFA	421BF449	4136D3A1	0D25AF93	424978AC	6525 8D75	00040F00	6525 8EEB
00052F01	6525 9063	00041F02	6525 91D9	00073F03	6525 9351	00031F04	6525 94C7	00032F05	6525 963F
00002F06	6525 97B5	00030F07	6525 992D	16043F08	6525 9AA3	00072F09	6525 9C1B	00042F0A	6525 9D91
00042F0B	6525 9F09	00001E0C	6525 A07F	00011E0D	6525 A1F7	00002E0E	6525 A36E	00000E0F	6525 A4E6
00012E10	6525 A65C	00020E11	6525 A7D4	00050F12	6525 A94A	00010E13	6525 AAC2	00063F14	6525 AC38
00071F15	6525 ADB0	00063F16	6525 AF26	3F071F17	6525 B09E	00073F18	6525 B214	00072919	6525 B38C
0007091A	6525 E502	00063918	6525 B67A	0006291C	6525 B7F0	0006091D	6525 B968	0006091E	6525 BADE
0006291F	6525 EC56	00060920	6525 BDCC	00060921	6525 BF44	00053922	6525 C0BA	00052923	6525 C232
00053924	6525 C3A8	00051925	6525 C520	00052926	6525 C696	00043927	6525 C80E	00051928	6525 C984

41AEE000	41C7E45D	00000006	C2115400	000074FE	421BE400	41356377	0800796F	4235813F	60007CC3
00002A00	60007121	00001A01	60007717F	00001A02	600071DC	00001A03	6000723A	00001A04	60007298
00001A05	600072F6	00001A06	60007353	00000A07	600073B1	1E000A08	6000740F	00001A09	600074CD
00001A0A	600074CA	00000A0B	60007528	00001A0C	60007586	00000A0D	600075E4	00001A0E	60007641
00001A0F	6000769F	00001A10	60007FD	00000A11	60007758	00071B12	60007788	00072B13	60007820
00071E14	6000787E	00072B15	60007BDC	00072B16	60007939	2C063B17	6000798D	00063B18	600079EB
00070B19	60007A49	00060B1A	60007AA6	00062B1B	60007B04	00070B1C	60007B62	00062B1D	60007BC0
00060B1E	60007C1D	00072B1F	60007C7B	00071B20	60007CD9	00062B21	60007D37	00061B22	60007D94
00062B23	60007DF2	00071B24	60007E50	00062B25	60007EAE	00061B26	60007F0B	00063B27	60007F69
00070B28	60007FC7	00060B29	60008025	00062B2A	60008082	00062B2B	600080E0	00062B2C	6000813E
00053B2D	6000819C	00060B2E	60008FF9	00060B2F	60008257	00060B30	600082B5	00051B31	60008313
00052E32	60008370	00060B33	60008CF	00061B34	60008420	00053B35	60008488	00060B36	600084E8
01053B37	60008545	00052B38	60008A3	00051B39	60008601	00052B3A	600086E	00051B3B	600086BC
00062B3C	6000871A	00063B3D	60008778	00052B3E	600087D5	00053B3F	60008833	00051B40	60008891
00052B41	600088EF	00050B42	60008E4C	00053B43	600089AA	00060B44	60008A08	00053B45	60008A66
00052B46	60008AC3	00061B47	60008B21	1E061B48	6000887F	00053B49	60008BDD	00060B4A	60008C3A
00053B4B	60008C98	00051B4C	60008CF6	00060B4D	60008D54	00051B4E	60008DB1	00061B4F	60008E11
00061B50	60008E6F	00060B51	60008ECD	00062B52	60008F2A	00053B53	BFFFFFFF	FFFFFFFF	BFFFFFFF
FFFFFFFF	BFFFFFFF	FFFFFFFF	60090A1	2D062B57	600090FE	00062B58	6000915C	00072B59	600091BA
00061B5A	60009217	00073B5B	60009275	00060B5C	600092D3	00061B5D	60009331	00063B5E	60009388
00071B5F	600093EC	00063B60	60009A4A	00072B61	600094A8	00063B62	60009505	00071B63	60009563
00070B64	600095C1	00070B65	60009561F	00071B66	6000967C	00070B67	600096DA	00000A68	60009738
00063B69	60009796	00072B6A	60009 7F3	00062B6B	60009851	00072B6C	600098AF	00072B6D	6000990D
00071B6E	6000996A	00072B6F	60009 9CB	00063B70	60009A26	00000A71	60009A84	00070B72	60009AE1
00072B73	60009B3F	00070B74	60009B9D	00073B75	60009BFB	00002A76	60009C58	01073B77	60009CB6
00001A78	60009D14	00072B79	60009D72	00000A7A	60009DCF	00000A7B	60009E2D	00000A7C	60009E8B
00001A7D	60009EE9	00073B7E	60009F46	00000A7F					

RECORD 1793 OF FILE 539
LENGTH = 4300 BYTES

122

0509EFEA	00000007A	00000000	00000003	41D30000	0000003D	00000007	00000008	0004EDEC	00000600
00000000	00000000	407C0000	41C7E25D	00000006	C2138800	0509C422	421BE400	41356377	0D09C88C
4235813F	6509EFBA	00020000	6509C018	00010001	6509C075	00013002	6509C0D4	00003003	6509C132
00011004	6509C190	00002005	6509C1ED	00020006	6509C24C	00010007	6509C2AA	1E002008	6509C308
00002009	6509C365	0001300A	6509C3EE	0002000B	6509C44C	0001300C	6509C4AA	0002000D	6509C507
0001000E	6509C566	0000300F	6509C5C4	00003010	6509C622	00003011	6509C67F	00021B12	6509C6DE
00012B13	6509C73C	00012B14	6509C79A	00012B15	6509C7F7	00011B16	6509C856	2C013B17	6509C8B4
00012B18	6509C912	00012B19	6509C96F	00012B1A	6509C9CE	00003B1B	6509CA2C	00010B1C	6509CA8A
00012B1D	6509CAE7	00012B1E	6509CB46	00003B1F	6509CBA4	00003B20	6509CC02	00003B21	6509CC5F
00001B22	6509CC98	00010B23	6509CCF6	00010B24	6509CD54	00003B25	6509CDB1	00010B26	6509CE10
00010B27	6509CE6E	00010B28	6509CECC	00011B29	6509CF29	00002B2A	6509CF88	00002B2B	6509CFE6
00003B2C	6509D044	00001B2D	6509D0A1	00002B2E	6509D100	00010B2F	6509D15E	00000B30	6509D1BC
00002B31	6509D219	00003B32	6509D264	00003B33	6509D2C2	00003B34	6509D320	00001B35	6509D37D
00001B36	6509D3DC	00001B37	6509D43A	00003B38	6509D498	00002B39	6509D4F5	00002B3A	6509D554
00002E3E	6509D5B2	00010B3C	6509D610	00003B3D	6509D66D	00001B3E	6509D6CC	00002B3F	6509D72A
00003E40	6509D788	00002B41	6509D7E5	00002B42	6509D844	00010B43	6509D8A2	00011B44	6509D900
00010B45	6509D95D	00000B46	6509D9BC	00002B47	6509DA1A	1E012B48	6509DA78	00012B49	6509DAD5
00010E4A	6509DB4C	00010B4B	6509DBAA	00001B4C	6509DC08	00003B4D	6509DC65	00003B4E	6509DCC4
00010B4F	6509DD22	00001E50	6509DD80	00013B51	6509DDDD	00013B52	6509DE3C	00021B53	6509DE9A
00003B54	6509DEF8	00011B55	6509DF55	00010B56	6509DFB4	2C013B57	6509E012	00011B58	6509E070
00021B59	6509E0CD	00012B5A	6509E12C	00013B5B	6509E18A	00013B5C	6509E1E8	00012B5D	6509E245
00012B5E	6509E2A4	00020B5F	6509E302	00020B60	6509E360	00021B61	6509E3BD	00013B62	6509E41C
00020B63	6509E47A	00020B64	6509E4D8	00023B65	6509E535	00020B66	6509E594	00020B67	6509E5F2
00021E68	6509E650	00013B69	6509E6AD	00013B6A	6509E6FE	00012B6B	6509E75C	00020B6C	6509E7EA
00012B6D	6509E817	00022B6E	6509E876	00013B6F	6509E8D4	00021B70	6509E932	00020B71	6509E98F
00020E72	6509E9EE	00031B73	6509EA4C	00023B74	6509EAAA	00021B75	6509EB07	00031B76	6509EB66
00023B77	6509EBC4	00013B78	6509EC22	00023B79	6509EC7F	00030B7A	6509ECDE	00023B7B	6509ED3C
00030B7C	6509ED9A	00030B7D	6509EDF7	00032B7E	6509EE56	00030B7F	00000000	407C0000	41C7E25D
00000006	C2138800	0509F2E0	421BE400	41356377	0D09F74A	4235813F	6509EEB4	00031B00	6509EF12
00023B01	6509EF6F	00020B02	6509EFCE	00030B03	6509F02C	00032B04	6509F08A	00022B05	6509F0E7
00032B06	6509F146	00033E07	6509F1A4	1E032B08	6509F202	00022B09	6509F25F	00023B0A	6509F2AC
00022E0B	6509F30A	00020B0C	6509F368	00030B0D	6509F3C5	00022B0E	6509F424	00022B0F	6509F482
00021B10	6509F4E0	00022B11	6509F53D	00020B12	6509F59C	00020B13	6509F5FA	00013B14	6509F658
00012B15	6509F685	00020B16	6509F714	2D012B17	6509F772	00010B18	6509F7D0	00013B19	6509F82D
00012E1A	6509F88C	00020B1B	6509F8EA	00013B1C	6509F948	00013B1D	6509F9A5	00013B1E	6509FA04
00021B1F	6509FA62	00011B20	6509FAC0	00012B21	6509FB1D	00011B22	6509FB7C	00012B23	6509FBDA
00010B24	6509FC38	00010B25	6509FC95	00010B26	6509FCF4	00010B27	6509FD52	00010B28	6509FDE0
00002E29	6509FE0D	00010B2A	6509FE72	00010B2B	6509FED0	00011B2C	6509FF2E	00012B2D	6509FF8B
00010E2E	6509FFEA	00002B2F	650A0048	00002B30	650A00A6	00001B31	650A0103	00001B32	650A0162
00002B33	650A01C0	00002B34	650A021E	00002B35	650A027B	00010B36	650A02DA	01011B37	650A0338
00003E38	650A0396	00001B39	650A03F3	00011B3A	650A0452	00002B3B	650A04B0	00002B3C	650A050E
00003B3D	650A056B	00010B3E	BFFFFFFF	FFFFFFFF	650B0409	00002B40	FFFFFFFF	FFFFFFFF	FFFFFFFF
FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF
FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF	FFFFFFFF

1753 RECORDS IN FILE 539 OF TAPE

APF028 [redacted]

05/08/81 - 05/30/81

D-56407

RECORD 1 OF FILE 2
LENGTH = 4300 BYTES

128

000003CD	00000080	00000000	00000002	00000000	0000002E	00000002	00000008	01E22600	FFFFFFFF
00000403	00000000	415C0000	41CF4EDC	00000002	413E8000	00000000	45F42400	41255775	0800BA7E
4223106F	EFFFFFFF	FFFFFFFF	EFFFFFFF	FFFFFFFF	EFFFFFFF	FFFFFFFF	EFFFFFFF	FFFFFFFF	EFFFFFFF
FFFFFFFF	EFFFFFFF	FFFFFFFF	EFFFFFFF	FFFFFFFF	EFFFFFFF	FFFFFFFF	600003D0	29C60EC8	60C00F9E
00061E09	60001B4D	00053B0A	60003706	00051B0B	600032BE	00051B0C	60003E76	00052E0D	60C04A2E
00062B0F	60005E7	00031000F	60006195F	00021010	60006D57	00020011	6000790F	00030012	60C0E4C7
00070013	60000080	00040014	60009C38	00041015	6000A7F0	00042016	6000E3A8	20042017	6000BF60
00052F18	6000CB19	00052F19	6000D6D1	00060B1A	6000E289	00060B1B	6000EE41	00051E1C	60C0F9FA
00052F1D	600105B2	00053B1E	60011164	00053B1F	60011D22	00033020	60012BDB	00033021	60C13493
00032022	60C140AB	00053023	60014C03	00032024	600157BB	00031025	60016374	00022026	60C16F2C
00033027	60017AE4	00041028	60018E9C	00053B29	60019255	00061E2A	60019E0D	00061E2B	60C1A9C5
00060E2C	6001E57D	00061B2D	6001C135	00060B2E	6001CCEE	00052E2F	6001D8A6	00070B30	60C1E45E
00060E31	6001F016	00030032	60C1FECF	00013033	60020787	00021034	6002133F	00030035	60021EF7
00040036	60022AB0	03032037	60023668	00023038	60024220	00031039	60024DD8	00062E3A	60C25591
00053B3B	60026549	00063B3C	60027101	00063B3D	60027CB9	00053E3E	60028871	00060B3F	60C2942A
00060E40	6002SFE2	00051B41	60C2AE5A	00060B42	6002B752	00031043	6002C30B	00023044	60C2CEC3
00033045	6002DA7B	00041046	6002E633	00040047	6002F1EB	29012048	6002FDA4	00032049	60C3095C
0002104A	60031514	0006204B	60032CCC	00052B4C	60032C85	00060B4D	60033B3D	00062B4E	60C343F5
00063B4F	60034FAD	00053B50	60035E65	00051B51	6003671E	00051B52	600372D6	00060B53	60C37E6E
00033054	6003EA46	00031055	60035EFF	00030056	6003A1B7	23040057	6003AD6F	00033058	60C3B927
00040059	6003C4E0	00030059	6003D058	00032058	6003DC50	00023050	6003E808	00060B5D	6003F3C0
00060E5E	6003FF79	00061B5F	60040E31	00052B60	60041659	00062B61	60042A1	00051E62	60042E5A
00053B63	60043A12	00060B64	60044SCA	00022065	60045182	00031066	60045D3E	00023067	60046BF3
00030068	600474AB	00020069	60048063	0004306A	60048C1E	00030060	60049704	00020060	60C4A38C
00022060	6004BF44	00050B6E	60C4EAFC	00053B6F	6004C6B5	00061E70	6004D26D	00061E71	60C4DE25
00053B72	60C4E9DD	00052B73	6004F555	00052B74	60050148	00051B75	60050D06	00051B76	60051BBE
02070077	60052476	00021078	60053C2F	00030079	60053BE7	0004107A	60054579F	00023070	60C55357
00050070	60055F0F	00023070	60056AC8	00042070	60057680	00070B7F	00000000	40E80000	41CF4EDC
00000002	413E8000	00060EA	421BE400	41255775	0806969B	4223106E	6005E238	00061B00	60058DF0
00061B01	60055SA9	00062B02	6005AE61	00052B03	6005B119	00070B04	6005BCD1	00062B05	60C5C889
00061B06	6005D442	00060B07	6005DFFA	29032008	6005EBB2	00040009	6005F76A	00041000A	60060323
00032000B	EFFFFFFF	FFFFFFFF	60061A93	00042000D	60062648	00023000E	60063204	00032000F	60063DBC
00022010	60064974	00061B11	60065520	00062B12	60066DE5	00061B13	60066C9D	00060B14	60067655
00053B15	6006B40D	00060B16	60066FC5	21053B17	60069B7E	00061B18	6006A736	00042019	6006B2EE
00040018	6006BFA6	00032018	60066C45F	0003201C	6006D617	00040010	EFFFFFFF	FFFFFFFF	60C6ED67
0003001F	6006F93F	00040020	60070478	00031021	60071080	00061E22	60071C68	00051E23	60072820
00060B24	600733D9	00060B25	60073F91	00053B26	60074E49	00053B27	60075701	00060B28	60C762EA
00062B29	60076B72	00060B2A	60077A2A	00032028	60078E52	00020020	60079194	00032020	60C79053
00023028	6007A90B	00031028	6007B4C3	00030030	6007C07E	00041031	6007CC34	00023032	6007D7EC
00060B33	6007E3A4	00052B34	6007EF6C	00052B35	6007FB14	00063E36	6008C6CD	01062E37	60081265
00051E38	60081E3D	00053B39	60082EF5	00070B3A	60083EAE	00052B3B	60084166	00060C3C	60C84D1E
00031030	60085BD6	00030030	60086E4EF	0002103F	60087047	00020040	60087BFF	00042041	60C887B7
00061B47	60088F09	29062B48	60089DC1	00060B49	6008AAE0	00061B4A	6008B658	00063B4B	60C8C250
00063B4C	60090BA2	00032004D	60091454	0003004E	60092012	00040004F	60092BCA	00023050	60093763
00032051	60094338	00022052	60094EF3	00022053	60095AAB	00041054	60096664	00052055	60C9721C
00052B56	60097DD4	20060B57	60098E6C	00070B58	60099544	00053B59	6009A0FD	00070B5A	6009ACB5
00060B5B	6009B86D	00053B5C	60C9C425	00063B5D	6009CFDE	00032050	6009DB96	00061B5F	6009E74E
00040060	6009F306	00030061	6009FEEF	00031062	600A0A77	00021063	600A162F	00031064	60CA21E7
00040065	600A2D9F	00022066	600A3558	00052B67	600A4510	00053B68	600A50C8	00061B69	60CA5C80
00070E6A	600A6838	00061B6B	600A73F1	00050B6C	600A7FA9	00053B6D	600A8B61	00063B6E	60CA9719
00061B6F	600AA2D2	00030070	600AAFEA	00042071	600AEA42	00033072	600AC5FA	00042073	60CAD1E3
00032074	600AD06B	00042075	600AE523	00050076	600AF4DB	00031077	600B0094	00060B78	60CB0C4C
00051E79	60CB1804	00061B7A	60CB23FC	00062B7B	600B2F74	00061B7C	600B3B2D	00053B7D	60CB46E5
00053B7E	600B5290	00053B7F	00000000	41528000	41CF4EDC	00000002	411F4000	000EE5C7	421BE400
41255775	0806B2B9	4223106B	600B5E55	00053B00	600B6A0E	00021001	600B75C6	00012002	60CB817E
00033003	600B8D36	00043004	60C9SEEF	00041005	600BA4A7	00033006	600BB05F	00051007	60CBBC17
00062B0D	600C7CFF	00021005	600BD388	00050B0A	600BCF40	00061B0B	600BEAF8	00062B0C	60CBF6B0
00033012	600C0269	00060B0E	600C0E21	00063B0F	600C19D9	00052B10	600C2591	00061B11	60CC3149
23022017	600C779B	00033016	600C8E53	00023019	600C8F0B	00041014	600C602A	00041016	60CC6BE3
00061B1C	600CE234	00061B1D	600CBDEC	00062B1E	600CC9A4	00063B1F	600CD55D	00050B20	60CCE115
00061B21	600CECCD	00053B22	600CF885	00031023	600D043E	00031024	600D0FF6	00022025	60CD1BAE
00013026	600D2766	00032027	600D331B	00032028	600D3ED7	00031029	EFFFFFFF	FFFFFFFF	60CD5647
00032028	600D61FF	00051B2C	600D6DE8	00053B2D	600D7970	00052E2E	600DE528	00061B2F	BFFFFFFF
FFFFFFFF	600D9C98	00052B31	600DAE51	00070B32	600DB405	00037B33	600DBFC1	00062E34	60CDCB75
00030035	600DD732	00032036	600DE2BA	02023037	600DEEA2	00043038	600DFA5A	00022039	60CE0613
00032039	600E11CB	00023038	600E1D63	0004103C	600E293F	00063B3D	600E34F3	00062E3E	60CE40AC
00060B3F	600E4C64	00063B40	600E581C	00063B41	600E63D4	00061B42	600E6F8D	00060B43	60CE7B45
00060B44	600E86FD	00061B45	600E92B5	00051046	600E9E6E	00030047	600EAA26	29023048	60CEB5DE
00020049	600EC196	00042004A	600ECD4E	00031004B	600ED507	00050004C	600EE4BF	0003204D	60CEF077
0003004E	600EFC2F	00052B4F	600F07E8	00053B50	600F13A0	00062B51	600F1F58	00063B52	60CF2F10